

FC
USGS
OFR
79-1308

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Audio-magnetotelluric data log and station-location
map for the Ennis Hot Springs area, Montana

by

Carl L. Long and Robert M. Senterfit

UNIVERSITY OF UTAH
RESEARCH INSTITUTE
EARTH SCIENCE LAB.


Open-File Report 79-1308

1979


This report is preliminary and has not been
edited or reviewed for conformity with U.S.
Geological Survey standards.

Four days were spent collecting 20 audio-magnetotelluric (AMT) soundings in the area of the Ennis Hot Springs, Mont. (fig. 1). These soundings were made to assist in a regional evaluation of the geothermal potential of the Ennis Hot Springs area.

Scalar resistivities from the data log (table 1) are indicative of thermal water altering the Quaternary alluvium to the southeast. The alteration extends over an area of 1.5 km by 4 km. The geothermal system is probably along a north-south range fault between the Precambrian gneiss and the Tertiary gravels. The scalar resistivities also indicate a northwest trend that may be an intersecting fault. Therefore any geothermal potential would probably be in the area near the existing hot spring, with a possible extent to the northwest of 1 km and to the southeast some 3 km.

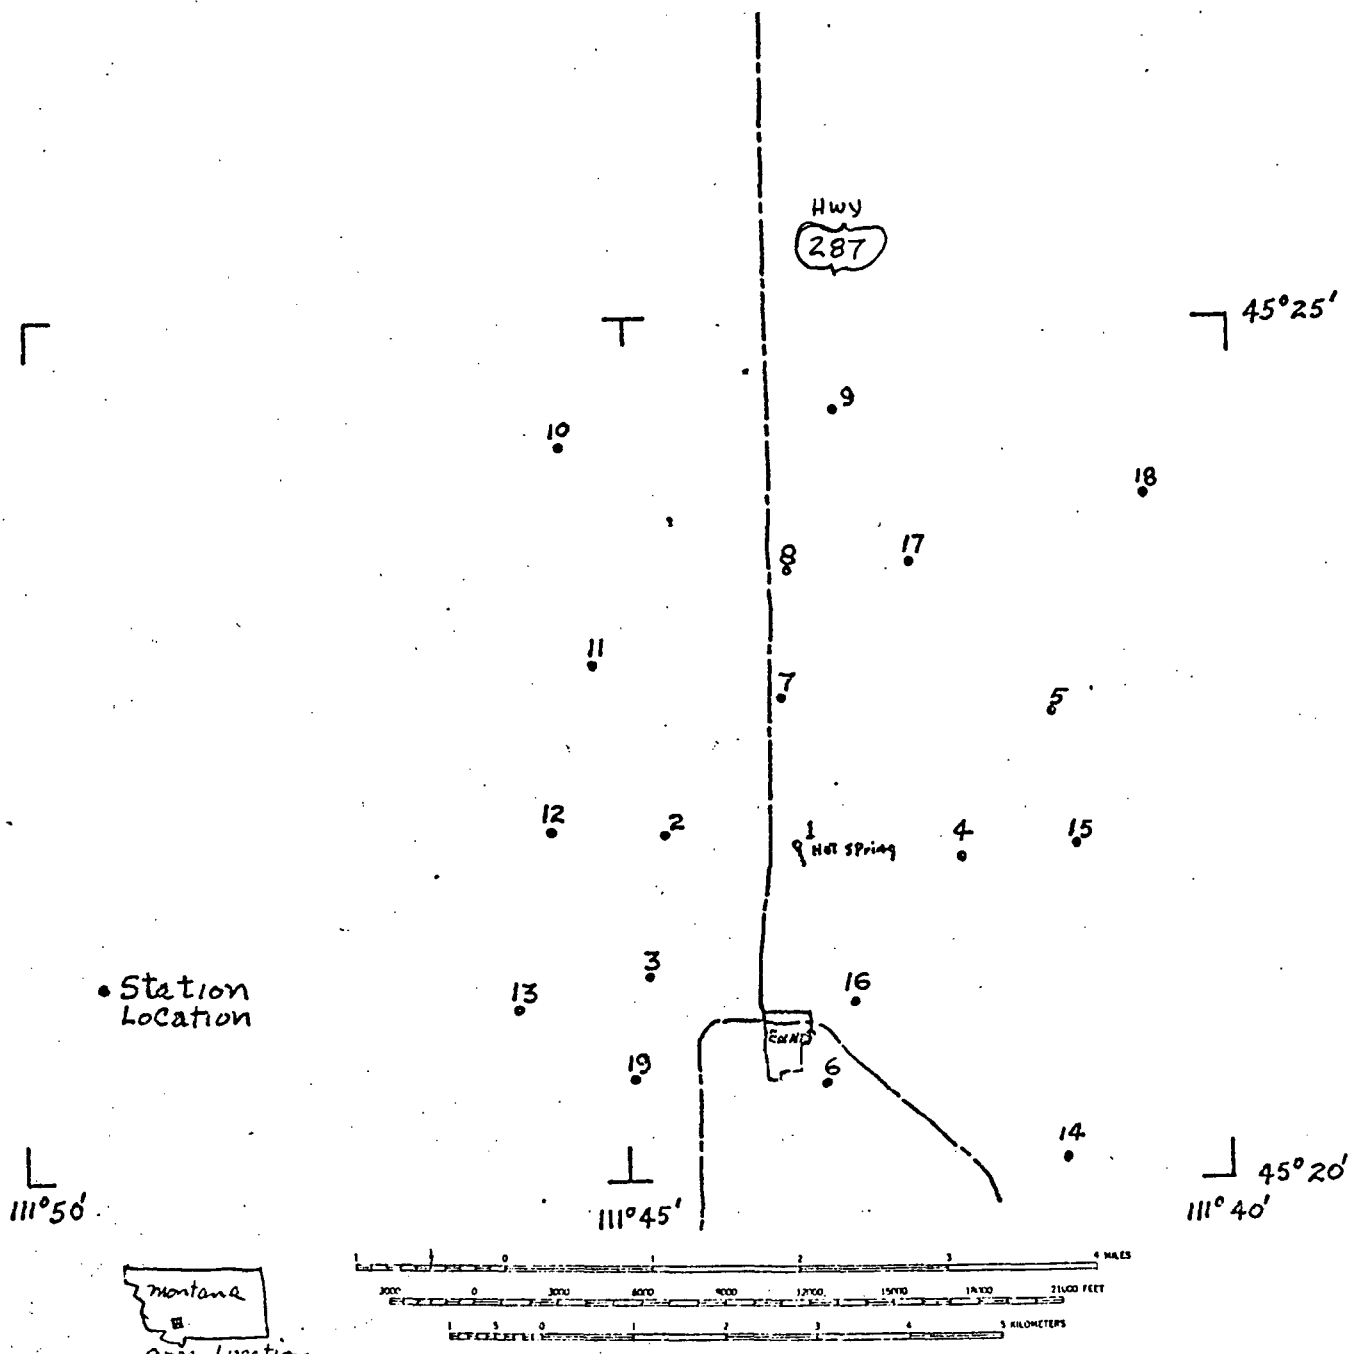

• Station Location



area location

Figure 1 - Audio-magnetotelluric station location map of Ennis Hot Springs area, Montana.

Table 1 - U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

Ennis, Montana
OCT., 1978

pa = observed apparent resistivity in ohm-meters

N = number of observations

Er = standard error in ohm meters

- = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
1 N S	pa	13.4	17.8	10.8	13.9	9.55		-	-	-	50.9	23.4	7.78
	N	5	5	6	6	6					7	5	1
	Er	3.28	4.87	1.15	2.25	1.67					3.65	3.83	-
1 E W	pa	1.98	2.72	3.60	1.88	3.19	3.81	-	-	-	13.9	126.	226.
	N	7	7	6	6	6	6				5	5	1
	Er	0.29	0.46	0.50	0.37	0.40	0.50				1.48	11.4	-
2 N S	pa	652.	1210.	1215.	780.	410.	462.	-	-	-	103.	319.	40.4
	N	7	6	6	6	5	6				6	6	1
	Er	111.	162.	107.	79.3	7.30	14.8				3.48	18.4	-
2 E W	pa	922.	846.	658.	477.	1070.	1076.	-	-	-	473.	565.	59.6
	N	6	5	7	6	6	7				6	6	1
	Er	90.4	176.	160.	142.	148.	70.3				25.7	32.3	-
3 N S	pa	98.2	80.1	120	90.0	34.9	43.3	-	-	-	93.2	53.6	46.5
	N	7	7	6	7	6	6				6	6	1
	Er	15.0	11.8	10.9	8.70	2.09	1.87				2.89	2.20	-
3 E W	pa	60.7	53.2	58.1	-	32.6	32.7	-	-	-	75.7	126.	64.2
	N	9	7	5		7	6				6	7	1
	Er	14.3	9.72	6.71		5.56	1.91				7.03	16.1	-
4 N S	pa	31.7	21.4	16.5	54.0	65.8	170.	-	-	-	97.7	61.9	60.2
	N	6	5	6	6	5	4				6	6	1
	Er	4.09	3.90	2.50	8.50	7.39	3.41				2.15	2.50	-
4 E W	pa	25.2	19.6	26.3	37.2	46.5	34.7	-	-	-	146.	151.	80.6
	N	5	5	5	6	7	6				7	5	1
	Er	1.57	3.11	8.56	3.38	7.40	4.01				5.06	8.26	-

Table 1 - U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG - Continued

pa = observed apparent resistivity in ohm-meters
 N = number of observations
 Er = standard error in ohm meters

Ennis, Montana
 OCT, 1978

- = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
5 _S	pa	19.7	34.0	20.0	56.3	65.5	69.8	-	-	-	107.	112	61.8
	N	6	5	8	5	5	5				6	1	1
	Er	2.53	3.26	1.96	12.3	12.9	4.59				4.18	-	-
5 _W	pa	17.2	25.9	23.2	46.3	81.4	62.1	-	-	-	139.	125.	119.
	N	6	5	6	5	6	6				5	1	1
	Er	2.69	6.28	3.03	5.82	19.5	9.17				17.1	-	-
6 _S	pa	40.3	38.8	30.4	46.5	24.1	42.8	-	-	-	93.2	65.6	47.5
	N	6	5	6	5	6	6				7	3	1
	Er	9.04	4.56	6.09	6.48	0.87	5.02				4.03	1.66	-
6 _W	pa	31.7	37.2	30.2	46.3	44.9	26.4	-	-	-	127.	72.8	70.0
	N	5	6	5	6	6	6				6	1	1
	Er	5.04	6.16	3.88	3.13	6.87	1.19				5.92	-	-
7 _S	pa	28.8	34.0	24.9	36.8	29.2	26.9	-	-	-	53.4	37.0	23.1
	N	7	7	6	6	6	4				5	7	1
	Er	2.74	4.06	5.23	2.20	0.26	0.46				2.74	1.76	-
7 _W	pa	28.7	10.2	11.7	11.6	15.2	11.9	-	-	-	108.	117.	50.0
	N	7	7	6	7	6	5				5	7	1
	Er	7.57	1.00	0.54	0.75	0.92	1.38				14.4	9.02	-
8 _S	pa	200.	222.	191.	210.	104.	43.4	-	-	-	55.2	80.7	42.6
	N	5	5	6	5	6	5				4	3	1
	Er	21.7	8.83	24.6	39.3	0.43	1.48				3.55	15.0	-
8 _W	pa	39.0	33.5	31.0	23.2	11.7	7.05	-	-	-	161.	357.	74.2
	N	6	6	5	5	4	4				3	3	1
	Er	4.34	3.92	2.18	1.47	0.65	0.13				6.83	147.	-

Table 1 - U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG - Continued

pa = observed apparent resistivity in ohm-meters
 N = number of observations
 Er = standard error in ohm meters

Ennis, Montana
 OCT., 1978

- = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
9 _S	pa	9.44	-	9.48	17.4	27.5	31.6	-	-	-	173.	75.6	62.4
	N	6		7	6	6	6				5	6	1
	Er	2.69		1.46	1.38	0.95	0.90				16.3	3.26	-
9 _W	pa	13.7	12.3	8.64	9.34	19.4	20.3	-	-	-	174.	198.	89.1
	N	7	6	5	6	7	6				5	3	1
	Er	1.37	1.46	1.03	0.56	1.23	2.83				6.41	20.4	-
10 _S	pa	723.	1164.	1002.	285.	86.2	148.	-	-	-	91.1	48.7	27.5
	N	5	4	3	4	5	4				5	4	1
	Er	83.3	45.2	54.6	77.0	8.26	30.5				2.42	2.71	-
10 _W	pa	281.	435.	377.	113.	118.	133.	-	-	-	128.	111.	83.6
	N	6	4	4	4	4	4				4	4	1
	Er	40.0	62.6	80.5	16.2	13.8	28.7				3.55	9.82	-
11 _S	pa	2437.	2510.	3080.	1728.	1083.	584.	-	-	-	303.	138.	152.
	N	7	6	6	6	5	5				6	1	1
	Er	167.	223.	552.	84.8	30.2	44.4				19.8	-	-
11 _W	pa	1181.	1227.	1326.	985.	766.	487.	-	-	-	244.	75.1	606.
	N	6	6	5	6	6	6				5	1	1
	Er	69.3	234.	226.	181.	59.4	62.2				13.8	-	-
12 _S	pa	2206.	2538.	1584.	1523.	722.	594.	-	-	-	272.	158.	122.
	N	6	7	6	6	5	5				4	1	1
	Er	162.	427.	272.	126	67.7	34.8				9.84	-	-
12 _W	pa	1374.	1358.	1142.	1243.	972.	297.	-	-	-	398.	285.	245.
	N	4	4	5	5	5	4				3	1	1
	Er	99.2	497.	144.	149.	143.	3.85					-	-

Table 1 - U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG - Continued

Ennis, Montana
OCT., 1978

pa = observed apparent resistivity in ohm-meters
N = number of observations
Er = standard error in ohm meters

- = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
13 _S ^N	pa	13.0	-	16.3	19.0	-	52.9	-	-	-	37.6	31.0	20.6
	N	8		7	7		8				7	4	1
	Er	1.73	3.66	1.39	1.93		3.20				1.29	3.02	-
13 _W ^E	pa	148.	170.	201	264	134	83.2	-	-	-	54.7	16.2	22.8
	N	7	6	7	7	8	7				7	1	1
	Er	14.3	30.1	9.58	28.4	2.9	4.61				1.70	-	-
14 _S ^N	pa	20.5	32.6	32.4	26.8	25.5	79.5	-	-	-	24.0	46.6	12.6
	N	5	6	5	6	5	5				6	1	1
	Er	0.97	7.01	7.50	1.00	2.72	9.51				1.29	-	-
14 _W ^E	pa	21.3	37.7	40.8	47.5	43.8	52.1	-	-	-	32.9	75.1	49.7
	N	6	5	5	5	4	5				5	1	1
	Er	2.05	1.76	11.8	4.26	5.58	1.41				2.54	=	-
15 _S ^N	pa	16.7	26.4	28.8	39.8	41.2	61.9	-	-	-	40.0	47.4	24.9
	N	7	7	6	6	6	6				5	1	1
	Er	2.52	1.90	3.48	3.28	1.38	1.56				1.50	-	-
15 _W ^E	pa	11.0	15.5	16.7	26.0	30.8	38.1	-	-	-	22.7	61.4	48.2
	N	7	7	6	6	5	5				5	1	1
	Er	1.47	2.04	1.23	3.10	0.74	5.09				2.57	-	-
16 _S ^N	pa	15.8	30.0	18.4	23.5	-	30.8	-	-	-	19.0	145.	61.9
	N	6	8	6	6		6				3	3	1
	Er	3.46	3.90	0.65	1.25		0.66				16.6	13.1	-
16 _W ^E	pa	16.3	22.8	15.7	21.0	31.9	41.5	-	-	-	313.	291.	-
	N	6	6	13	7	5	3				3	3	
	Er	1.66	4.73	0.78	1.32	2.99	4.10				8.10	21.8	

Table 1- U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG-Continued

pa = observed apparent resistivity in ohm-meters
 N = number of observations
 Er = standard error in ohm meters

Ennis, Montana
 OCT., 1978

- = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
17 _S	pa	22.5	34.4	23.7	31.0	37.2	33.1	-	-	-	171	58.3	59.8
	N	5	5	5	6	6	6				6	1	1
	Er	0.98	1.94	1.23	3.00	5.18	1.75				7.23	-	-
17 _W	pa	10.7	12.7	20.5	20.4	21.9	27.3	-	-	-	214.	184.	63.0
	N	6	6	6	6	7	5				5	1	1
	Er	0.47	1.95	1.79	1.90	1.99	1.09				10.0	-	-
18 _S	pa	42.4	42.5	114.	229.	293.	-	-	-	-	142.	73.9	50.2
	N	10	7	5	5	5					4	4	1
	Er	7.85	11.7	27.6	32.8	10.9					18.6	2.0	-
18 _W	pa	15.9	65.7	42.5	234.	264.	-	-	-	-	304.	227.	66.4
	N	6	5	8	5	5					4	3	1
	Er	3.49	8.78	10.4	16.8	17.9					6.98	81.9	-
19 _S	pa	272.	314.	192.	189.	53.5	41.6	-	-	-	63.6	43.0	39.8
	N	5	5	7	7	6	1				5	7	1
	Er	26.5	13.6	10.4	16.3	2.07	-				4.15	1.60	-
19 _W	pa	61.1	108.	93.7	49.9	25.8	15.1	-	-	-	168.	127.	56.4
	N	7	5	6	6	6	1				5	1	1
	Er	14.0	25.5	23.8	8.54	2.12	-				9.16	-	-
20 _S	pa	13.0	12.2	8.28	5.69	5.45	18.6	-	-	-	85.1	56.7	44.5
	N	8	6	8	5	8	5				8	8	1
	Er	1.42	2.45	0.82	0.33	0.21	1.83				6.11	2.21	-
20 _W	pa	3.38	4.12	3.85	3.40	4.09	10.6				157.	165.	3.11
	N	7	7	6	8	8	6				5	5	1
	Er	0.48	0.42	0.49	0.31	0.30	0.97				385	16.3	-