

G600755

FC
USGS
OFR
76-285

Reproduction
Copy 2

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Audio-magnetotelluric data log, apparent resistivity
maps and station location map for the Darrough
Known Geothermal Resource Area (KGRA), Nevada

Nye Co.

By

Carl L. Long, Robert M. Senterfit and Harold E. Kaufmann
U.S. Geological Survey

Open-file Report No. 76-285
1976

This report is preliminary and has not been
edited or reviewed for conformity with U.S.
Geological Survey standards and nomenclature.

UNIVERSITY OF UTAH
RESEARCH INSTITUTE
EARTH SCIENCE LAB.

UNIVERSITY OF UTAH
RESEARCH INSTITUTE
EARTH SCIENCE LAB.

U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

pa = observed apparent resistivity in ohm-metres
 N = number of observations
 Er = standard error in ohm-metres - = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.	FREQUENCY												
	7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K	
1N-S	pa	16.7	18.5	17.2	20.8	17.5	23.8	44.6	49.2	123.	130.	300.	1536.
	N	7	6	8	7	6	6	6	6	6	6	5	1
	Er	2.2	4.2	.7	2.2	1.1	2.8	2.0	2.3	20.6	15.	63.	-
1E-W	pa	17.4	11.4	12.0	15.6	23.0	37.2	88.1	60.8	123.	90.9	335.	514.
	N	7	8	7	9	6	7	8	6	7	8	6	1
	Er	1.3	1.3	.7	.9	.9	2.8	6.1	6.8	39.6	5.8	26.	-
2N-S	pa	11.2	25.1	19.7	33.5	41.4	92.3	183.	153.	242.	225.	273.	765
	N	7	9	8	9	10	9	8	5	6	9	3	1
	Er	2.66	5.54	1.71	2.42	1.47	8.95	27.1	32.4	43.2	48.5	36.2	-
2E-W	pa	6.3	69.9	54.6	66.2	99.2	209.	904.	502.	1656.	505.	1076.	352.
	N	7	10	10	9	10	9	12	9	8	11	1	1
	Er	11.1	8.93	2.61	3.66	6.19	22.9	108.	82.2	22.9	34.8	-	-
3N-S	pa	14.4	6.07	5.75	5.40	4.93	9.50	30.8	-	22.9	19.7	142.	31.0
	N	6	10	11	7	6	10	7	-	4	6	6	1
	Er	5.16	.73	.54	.92	1.08	1.59	6.49	-	4.22	5.01	31.7	-
3E-W	pa	39.2	34.0	38.9	45.1	50.3	30.0	66.4	-	46.5	109.	89.7	57.7
	N	8	8	10	7	11	8	8	-	8	6	5	1
	Er	8.77	4.69	2.83	5.81	2.59	2.33	18.7	-	5.05	16.2	10.6	-
4N-S	pa	13.6	10.6	22.9	21.2	7.79	28.5	40.9	-	-	47.1	73.7	328.
	N	11	9	9	11	8	12	1	-	-	9	5	1
	Er	2.3	1.85	7.75	1.7	.70	2.2	-	-	-	3.03	9.56	-
4E-W	pa	18.2	19.8	24.1	26.7	47.9	68.1	100.	-	-	101.6	179.	2917.
	N	11	11	9	8	10	12	3	-	-	11	6	1
	Er	1.9	2.44	1.44	1.11	3.05	4.22	26.3	-	-	11.7	3.44	-

U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

pa = observed apparent resistivity in ohm-metres

N = number of observations

Er = standard error in ohm-metres - = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
5NS	pa	5.66	6.31	5.33	5.90	6.55	9.2	-	-	-	786.	826.	6990.
	N	11	6	10	13	10	12	-	-	-	11	5	†
	Er	0.7	2.13	0.40	0.4	0.4	0.4	-	-	-	60.7	41.3	-
5EW	pa	5.0	2.56	3.04	3.87	6.25	10.6	-	-	-	108.	309.	590.
	N	14	10	10	12	8	13	-	-	-	11	5	†
	Er	0.6	0.29	0.29	0.20	0.32	0.70	-	-	-	4.5	3.31	-
6NS	pa	6.0	9.78	8.02	9.4	11.4	25.6	-	-	-	2605.	1787.	8734.
	N	14	4	7	8	10	8	-	-	-	7	6	1
	Er	1.7	1.79	1.84	0.9	0.88	2.9	-	-	-	220.	208.	-
6EW	pa	5.2	7.06	4.32	5.20	12.6	20.0	-	-	-	220.	823.	1148
	N	7	7	10	8	10	10	-	-	-	11	8	1
	Er	0.9	0.82	0.72	1.2	3.14	6.0	-	-	-	5.82	55.7	-
7NS	pa	6.7	58.4	45.9	36.6	24.4	36.0	590.	836.	3647.	3600.	2583.	17650.
	N	7	4	4	8	7	11	10	8	7	9	7	1
	Er	1.8	17.8	9.37	13.3	3.19	5.8	95.1	141.	631.	225.	150.	-
7EW	pa	8.7	9.00	8.01	8.60	11.7	24.9	507.	104.	883.	505.	2462.	2605.
	N	10	6	10	10	10	12	7	9	10	14	8	1
	Er	1.34	3.71	1.04	1.50	0.43	4.7	134.	13.5	10.1	36.2	69.19	-
8NS	pa	7.7	52.9	5.26	5.1	6.32	10.4	30.1	235.	136.	515.	777.	3868.
	N	7	5	8	11	10	8	5	7	4	6	5	1
	Er	1.1	13.3	0.58	0.60	0.56	1.30	3.0	51.3	39.2	69.	74.2	-
8EW	pa	24.1	18.9	3.12	3.9	7.06	9.1	24.4	28.6	41.9	1206	161.	577.
	N	6	2	10	15	10	15	10	10	10	13	5	1
	Er	4.8	1.40	0.26	0.20	.87	0.80	1.91	5.67	1.02	15.0	3.26	†

U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

pa = observed apparent resistivity in ohm-metres
 N = number of observations
 Er = standard error in ohm-metres - = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
9 _{N-S}	pa	11.3	34.2	26.9	24.4	26.3	168.	88.4	38.7	115.	104.	128.	486.
	N	5	5	6	7	6	8	9	6	6	6	8	1
	Er	1.35	2.75	3.74	5.5	5.26	33.1	11.9	12.3	16.2	10.8	26.2	-
9 _{EW}	pa	17.4	11.7	15.9	14.9	-	27.7	53.0	14.1	70.7	43.8	80.9	249.
	N	7	10	9	5	-	7	8	8	5	7	7	1
	Er	3.42	1.35	1.95	2.97	-	1.7	7.72	3.46	17.1	8.20	9.0	-
10 _{N-S}	pa	97.6	150.	236.	164.	150.	190.	-	-	-	175.	150.	858.
	N	10	13	11	13	11	12	-	-	-	11	9	1
	Er	14.9	23.3	45.	11.8	9.7	9.3	-	-	-	7.3	9.1	-
10 _{EW}	pa	83.1	68.9	73.6	71.9	63.4	72.3	-	-	-	44.7	106.	170.
	N	12	12	13	12	10	10	-	-	-	8	13	1
	Er	8.1	7.2	15.	2.9	2.8	2.7	-	-	-	3.7	5.0	-
11 _{N-S}	pa	36.1	12.3	82.7	52.1	34.1	27.7	-	-	-	179.	216.	817.
	N	5	2	8	13	10	12	-	-	-	11	3	1
	Er	5.9	2.17	14.0	5.2	2.07	1.5	-	-	-	11.3	34.5	-
11 _{EW}	pa	17.2	12.1	18.4	25.6	43.5	66.9	-	-	-	52.2	206.	114.
	N	10	6	6	10	10	12	-	-	-	17	1	1
	Er	2.95	4.13	2.60	2.80	1.65	3.5	-	-	-	1.8	-	-
12 _{N-S}	pa	17.4	30.8	32.4	27.7	21.2	22.5	55.7	31.6	98.7	239.	247.	837.
	N	6	5	9	11	6	8	6	5	5	7	4	1
	Er	1.82	7.82	5.6	3.29	1.58	5.09	10.0	9.32	15.5	21.	43.8	
12 _{EW}	pa	20.4	22.1	18.9	24.4	28.9	9.28	131.	53.8	64.2	85.1	311.	70.2
	N	6	5	9	10	10	10	6	5	7	9	5	1
	Er	2.53	2.55	2.22	1.05	1.81	1.79	8.7	11.2	7.24	6.93	3.58	

U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

pa = observed apparent resistivity in ohm-metres
 N = number of observations
 Er = standard error in ohm-metres - = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
13NS	pa	10.4	14.2	21.3	16.1	24.7	31.4	50.9	25.0	387.	451.	365.	1536.
	N	10	5	6	15	10	12	10	11	10	14	12	1
	Er	1.4	3.66	1.71	1.80	4.01	4.4	5.3	2.4	54.	36.8	41.2	-
13EW	pa	17.4	25.0	19.2	15.8	18.6	47.5	179.	72.1	216.	842.	2308.	1093.
	N	12	9	8	14	10	13	10	8	11	11	11	1
	Er	3.0	4.77	1.73	0.9	1.12	6.4	29.9	14.9	23.	49.6	169.	-
14NS	pa	16.5	110.	74.0	114.6	43.5	48.	263.	920.	517.	39.0	1104.	5235.
	N	7	4	2	6	5	12	6	11	9	12	5	1
	Er	2.6	52.4	52.1	20.1	7.97	10.2	48.1	142.	62.0	3.3	66.8	-
14EW	pa	15.3	18.3	16.1	17.5	30.3	71.8	300.	95.7	232.	763.	1387.	308
	N	10	5	10	13	9	15	6	9	10	13	5	1
	Er	1.3	4.33	1.85	1.1	3.41	9.8	92.7	15.8	17.2	39.8	36.7	-
15NS	pa	17.8	50.6	11.4	18.2	19.8	24.2	196.	-	91.7	217.	336.	1150.
	N	4	5	3	7	6	9	7	-	7	11	14	1
	Er	3.08	11.0	2.43	5.39	8.28	3.69	42.6	-	28.3	14.8	19.2	-
15EW	pa	24.1	71.7	23.7	25.6	48.8	124.	577.	-	269.6	1294.	2943.	1206.
	N	7	3	7	10	4	10	7	-	12	10	12	1
	Er	2.56	16.1	3.18	5.74	19.2	18.0	144.	-	269	99.3	238.	-
16NS	pa	8.22	11.2	24.4	9.9	10.4	15.3	79.8	41.1	98.4	132.	254.	-
	N	6	3	5	9	13	14	9	10	17	10	7	-
	Er	1.55	4.41	7.52	1.4	1.2	3.0	16.5	10.3	9.45	7.8	7.0	-
16EW	pa	47.7	24.3	25.5	19.4	31.7	64.5	213.	124.	243.	1123.	2022.	-
	N	7	5	20	11	11	11	10	11	23	8	8	-
	Er	10.9	8.42	6.81	2.4	3.4	7.6	42.	23.	10.0	87.8	97.0	-

U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

pa = observed apparent resistivity in ohm-metres
 N = number of observations
 Er = standard error in ohm-metres - = no data

"NOTE" - Telluric line orientation indicated with station numbers.


Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
17NS	pa	7.6	11.5	5.48	4.8	4.47	6.90	108.	-	-	366.	366.	1435.
	N	8	7	13	11	17	10	3	-	-	9	8	1
	Er	.3	1.33	0.51	0.3	0.22	1.90	27.9	-	-	21.3	38.2	-
17EW	pa	12.0	11.3	13.2	18.1	23.9	39.4	618.	-	-	490.	1031.	4780.
	N	10	18	18	11	10	11	4	-	-	10	9	1
	Er	2.9	1.00	1.30	1.50	0.85	3.60	214.	-	-	21.8	98.2	-
18NS	pa	10.0	14.0	13.1	22.2	41.8	3.8	-	-	-	179.	510.	-
	N	5	4	12	10	12	7	-	-	-	7	11	-
	Er	1.57	3.42	0.82	1.79	4.95	0.88	-	-	-	7.0	12.1	-
18EW	pa	8.45	20.5	19.3	23.5	62.8	106	1853.	-	-	1017.	2537.	2826.
	N	6	7	10	7	6	8	6	-	-	7	9	1
	Er	1.91	2.87	1.99	3.99	10.1	23.2	368.	-	-	180.	190.	-
19NS	pa	8.9	11.5	17.4	28.2	22.1	140.	-	36.9	-	1665.	2001.	6144.
	N	9	12	13	10	7	10	-	2	-	13	11	1
	Er	1.8	2.33	1.88	3.3	1.63	32.9	-	5.2	-	11.5	189.	-
19EW	pa	16.2	20.9	16.2	20.0	22.6	53.0	161.5	243.	-	837	1514.	634
	N	10	8	19	10	10	11	4	2	-	12	21	1
	Er	2.2	4.02	1.18	1.40	1.60	7.3	83.9	40.1	-	112	73.7	-
20NS	pa	4.4	9.97	12.7	14.5	14.4	20.7	-	28.2	-	908.	975.	4193.
	N	5	6	12	6	13	7	-	1	-	9	8	1
	Er	0.8	2.11	1.22	1.3	0.64	1.6	-	-	-	52.2	104.2	-
20EW	pa	20.0	15.3	11.5	12.6	20.3	32.6	92.1	-	-	386.	82.1	1329.
	N	8	6	12	8	9	8	2	-	-	10	12	1
	Er	2.8	5.32	2.45	0.54	1.82	5.2	64.6	-	-	11.8	2.97	-

U.S. GEOLOGICAL SURVEY A.M.T. DATA LOG

pa = observed apparent resistivity in ohm-metres
 N = number of observations
 Er = standard error in ohm-metres - = no data

"NOTE" - Telluric line orientation indicated with station numbers.

Sta. No.		FREQUENCY											
		7.5	10	14	27	76	285	685	1.2K	3.3K	6.7K	10.2K	18.6K
21NS	pa	175.	157.	259.	185.	181.	157.	88.8	30.9	260.	521.	1180.	2856.
	N	7	6	9	15	14	17	15	9 5	5	10	8	1
21EW	Er	37.7	17.8	32.6	17.8	4.88	9.06	11.03	7.93	38.2	82.1	341.	-
21EW	pa	77.0	56.1	62.1	70.0	88.9	101.	121.	21.2	33.5	393.	604.	2295.
	N	9	14	23	18	26	21	20	8	5	20	27	1
	Er	11.6	13.8	5.27	4.95	3.55	4.89	24.7	3.18	4.53	43.5	37.8	-
22NS	pa	4.73	6.88	10.35	11.9	12.9	12.9	-	-	-	661.	685.	3992.
	N	10	15	12	36	33	15	-	-	-	17	1	1
	Er	.53	.90	.93	.67	.43	1.22	-	-	-	36.3	-	-
22EW	pa	5.64	7.30	8.22	10.6	24.2	275	302.	-	-	297.	1052.	1596.
	N	6	19	25	36	23	24	2	-	-	19	9	1
	Er	0.85	0.57	0.45	0.42	2.41	1.51	55.9	-	-	13.5	103.5	-
	pa												
	N												
	Er												
	pa												
	N												
	Er												
	pa												
	N												
	Er												

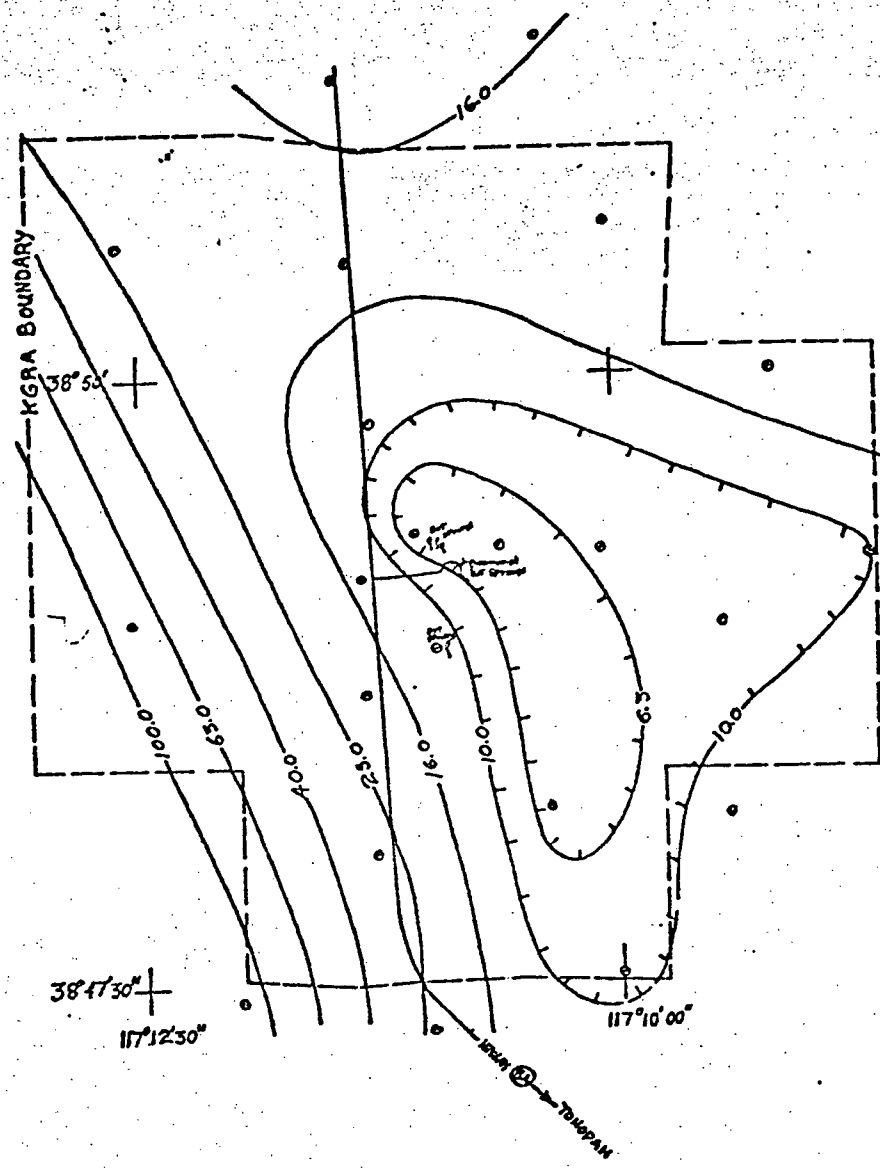


Explanation:

Scale: 1:62500

- ⊙ Station location
- Resistivity contours shown are on a logarithmic interval in ohm-metres, computed from the average of the north-south and east-west scalar impedances.

Figure 1. Audio-magnetotelluric apparent resistivity map at 7.5 Hz. for the Darrough Hot Springs KGRA, Nevada.

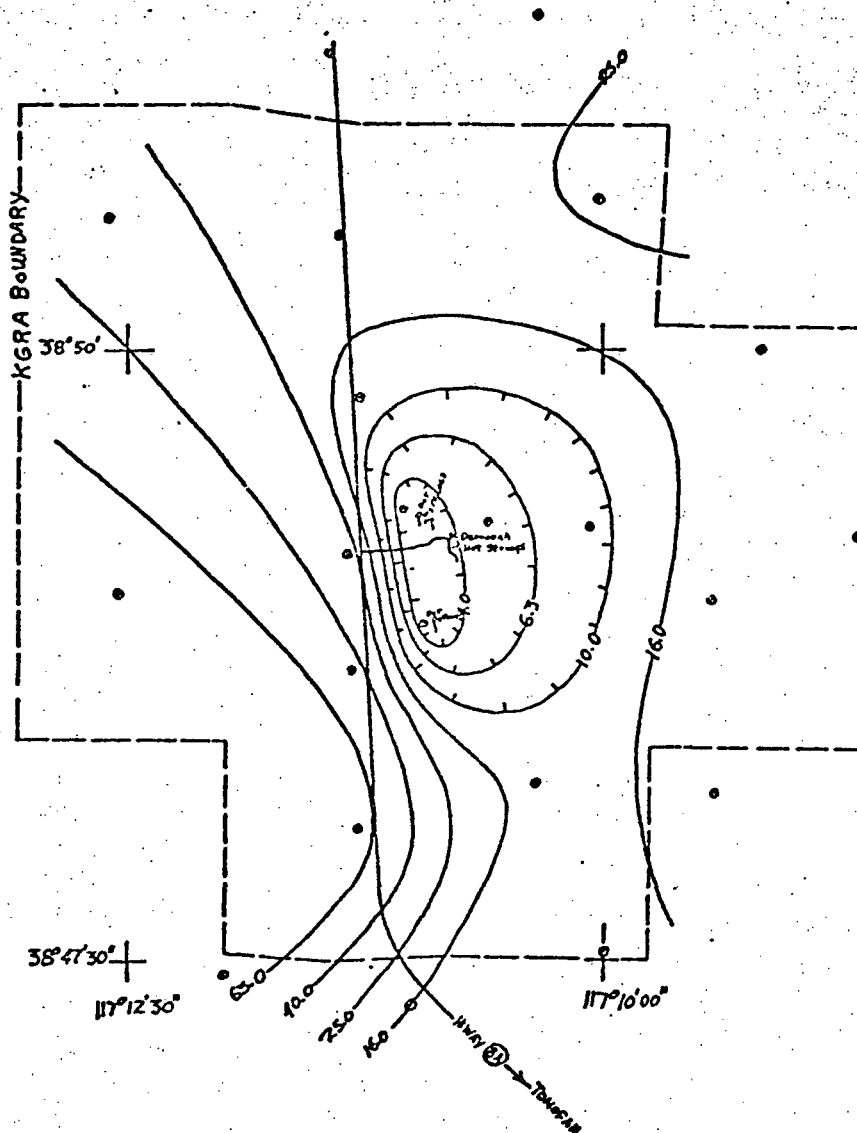


Scale: 1:62500

Explanation:

⊗ station location

Resistivity contours shown are on a logarithmic interval for ohm-metres.

Figure 2. Audio-magnetotelluric apparent resistivity map at 27 Hz. telluric line east-west, Darrough Hot Springs KGRA, Nevada.

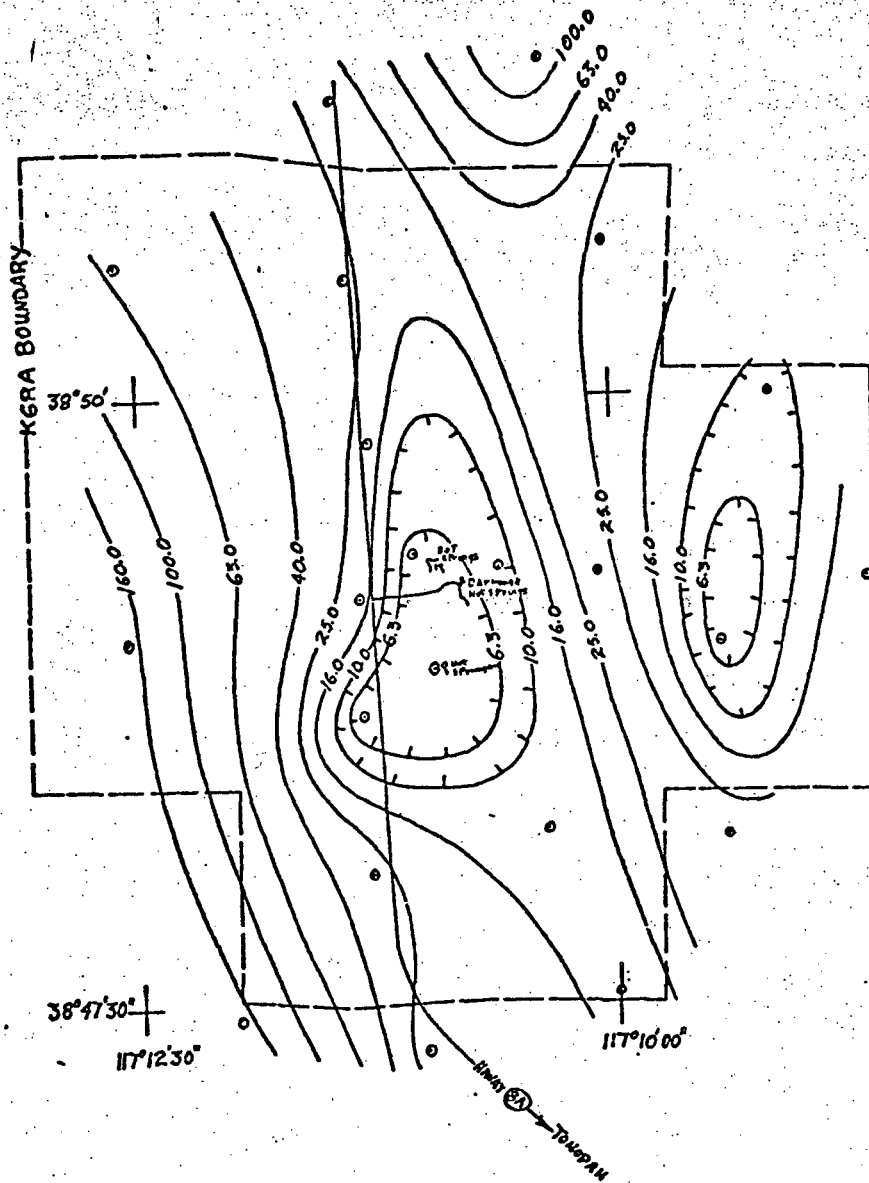

Scale: 1:62500

Explanation:

⊙ Station location

Resistivity contours shown are on a logarithmic interval in ohm-metres.

Figure 3. Audio-magnetotelluric apparent resistivity map at 27 Hz., telluric line north-south, Darrough Hot Springs KGRA, Nevada.

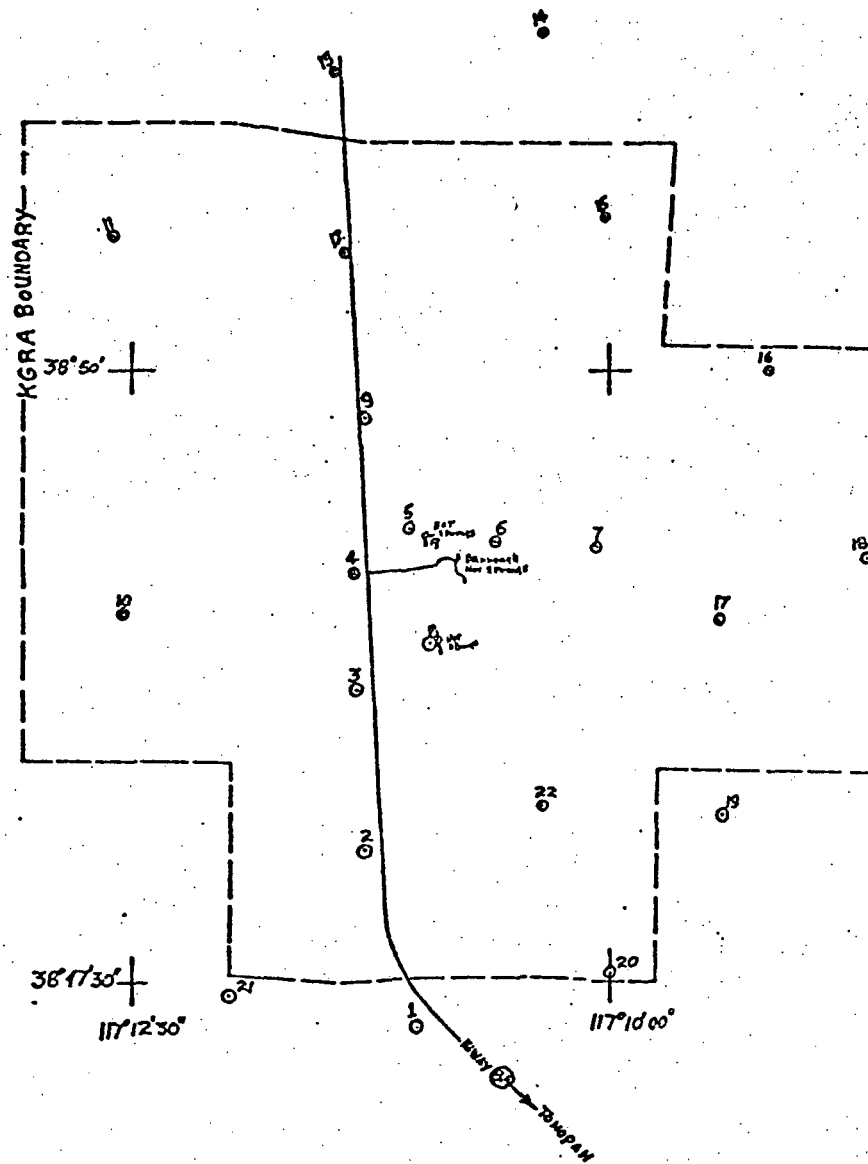


Figure 4. Audio-magnetotelluric station location map for Darrough Hot Springs KGRA, Nevada.