

GLOK811

Foley

STATE OF OREGON  
DEPARTMENT OF GEOLOGY AND MINERAL INDUSTRIES  
1005 State Office Building  
Portland, Oregon 97201

OPEN-FILE REPORT 0-80-3

PRELIMINARY GEOLOGY AND  
GEOTHERMAL RESOURCE POTENTIAL  
OF THE  
WILLAMETTE PASS AREA,  
OREGON

by

D. E. Brown,

G. D. McLean,

N. M. Woller, and

G. L. Black

Under the direction of J. F. Riccio

LIBRARY  
OREGON DEPARTMENT OF GEOLOGY  
AND MINERAL INDUSTRIES  
1069 STATE OFFICE BUILDING  
PORTLAND, OREGON 97201

Study completed under U. S. Department of Energy  
Cooperative Agreement No. DE-FC07-79ET27220  
and Oregon Department of Energy Contract No. 1-003-33

1980

DISCLAIMER

This report has not been edited for complete conformity with Oregon Department of Geology and Mineral Industries standards. Data in this document are preliminary and are subject to change upon further verification.

## CONTENTS

|  |    |
|--|----|
| INTRODUCTION . . . . .                                 | 1  |
| GEOLOGY . . . . .                                      | 3  |
| Introduction . . . . .                                 | 3  |
| Volcanic stratigraphy . . . . .                        | 4  |
| Structural geology . . . . .                           | 6  |
| Relation of structures to geothermal systems . . . . . | 8  |
| GEOPHYSICS . . . . .                                   | 9  |
| WATER CHEMISTRY . . . . .                              | 14 |
| GRADIENT DATA AND HEAT FLOW . . . . .                  | 21 |
| CONCLUSIONS AND RECOMMENDATIONS . . . . .              | 25 |
| BIBLIOGRAPHY . . . . .                                 | 27 |
| APPENDIX A . . . . .                                   | 33 |

## ILLUSTRATIONS

### FIGURES

1. Map showing location of study area, Willamette Pass area, Oregon . . . 2
2. Photo-lineament map, Willamette Pass area . . . . . 7
3. Total field aeromagnetic anomaly map, Willamette Pass area . . . . . 10
4. Complete Bouguer anomaly map, Willamette Pass area . . . . . 11
5. Residual gravity anomaly map, Willamette Pass area . . . . . 12

### TABLES

1. Radiometric (K/Ar) ages for selected rocks, Willamette Pass area . . . 3
2. Bulk chemical composition for selected rocks, Willamette Pass area . . . 5
3. Spring and well chemistry, Willamette Pass area . . . . . 15
4. Geothermetric calculations of minimum reservoir temperatures for thermal waters, Willamette Pass area . . . . . 19
5. Geothermal-gradient data, Willamette Pass area . . . . . 22

### MAPS (folded, in envelope)

Plate I. Reconnaissance geology of the Willamette Pass area, Oregon

## INTRODUCTION

The Willamette Pass area is located in the central Western Cascade Range of Oregon approximately 80 km (50 mi) east of Eugene, Oregon, up the Willamette River drainage (Figure 1). Limits of the study area were arbitrarily assigned to U.S. Geological Survey (USGS) topographic map boundaries and to natural breaks in the geology and topography (Plate I). This study, performed under U.S. Department of Energy (USDOE) Contract No. DE FC07-79ET27220 and Oregon Department of Energy Contract No. 1-003-33, was undertaken to estimate the geothermal potential of the area, using various methods including compilation of existing data, reconnaissance geologic mapping, lineament analysis, well and spring geochemistry, and accrual of geothermal-gradient data.

Geographically, the study area is located in the rugged mountains immediately east of Oakridge, Oregon, which is located at the western edge of the map. Drainage in the area is through two forks of the Willamette River, Salmon Creek, and Salt Creek, from the east towards the west via deep, V-shaped canyons.

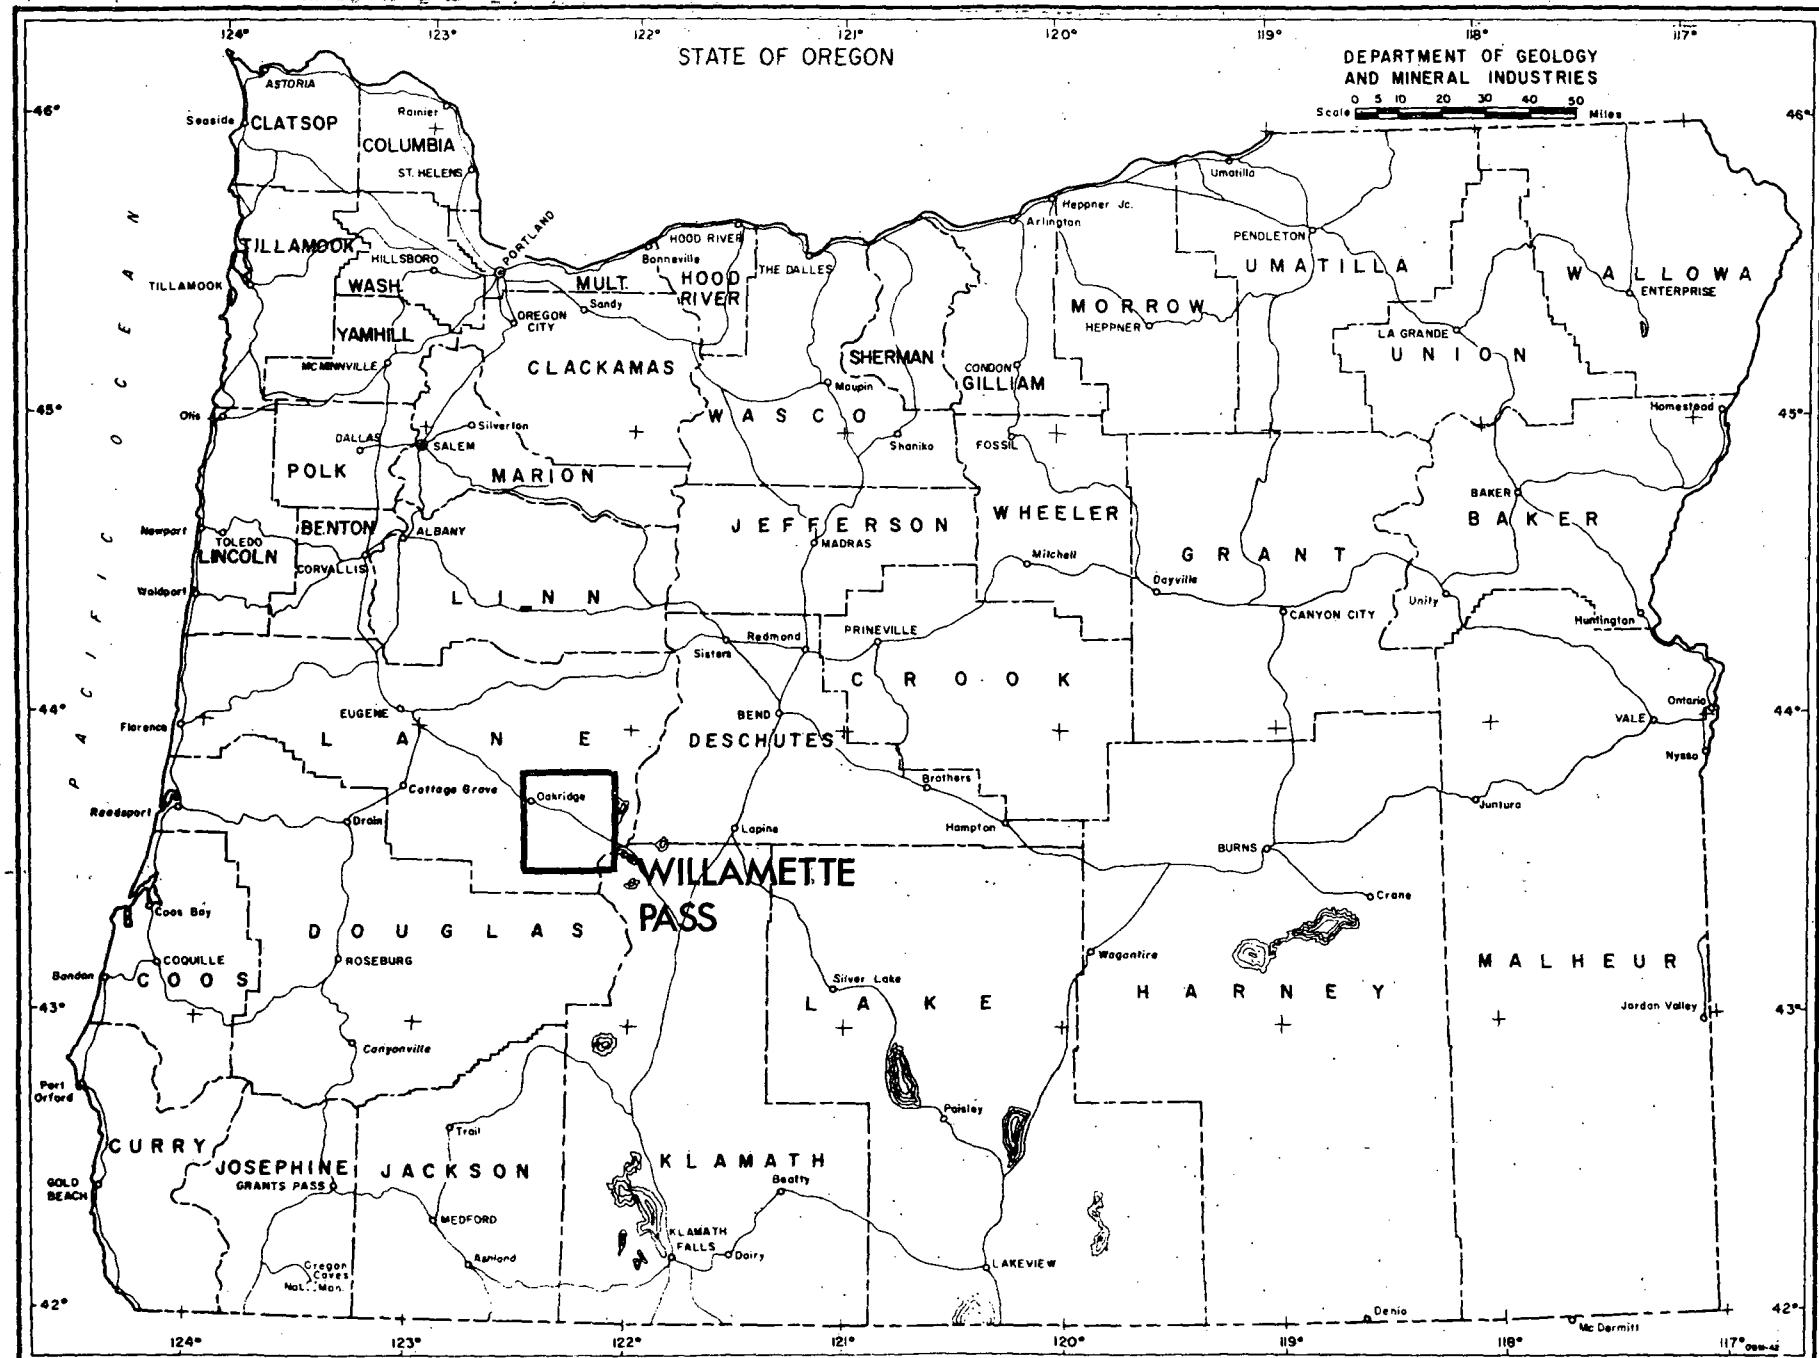


Figure 1: Map showing location of study area.

## GEOLOGY

### Introduction

The Willamette Pass area encompasses parts of both the Western Cascades and High Cascades geologic provinces (Figure 1). The area is dominated in the western part by older Western Cascades Oligocene tuffaceous rocks and Miocene lavas (Plate 1) and in the eastern part by High Cascade lavas of Quaternary and latest Tertiary age and Pliocene lavas. High-angle normal faults cut the area in numerous places, following chiefly north and northwest trends; a major northwest-trending lineament, the Eugene-Denio lineament, crosses the area (Lawrence, 1976). Alteration zones and local Miocene volcanic centers near these faults and lineaments have obscured important relationships in the Western Cascades province. It was found during this study that the geology and structure of the Willamette Pass area were generally more complex to interpret than those of the Belknap-Foley area to the north.

Table 1. Radiometric (K/Ar) ages for selected rocks of the Willamette Pass area

| <u>Sample no.*</u> | <u>Location</u>         | <u>Rock type</u> | <u>Age (m.y.)</u> | <u>Stratigraphic unit</u> |
|--------------------|-------------------------|------------------|-------------------|---------------------------|
| OM-5               | 122°20'09"<br>43°34'15" | Dacite           | 21.3±1.0          | Tms                       |
| OM-520             | 122°22'15"<br>43°48'45" | Rhyolite         | 17.3±0.7          | Tms                       |
| OM-49              | 122°23'24"<br>43°36'41" | Basalt           | 18.7±0.9          | Tmv                       |

\*OM - analyzed for this report by University of Utah Research Institute (UURI), Stanley Evans and Duncan Foley, analysts.

### Volcanic stratigraphy

The geologic history of the Willamette Pass area resembles the history of the Belknap-Foley area to a remarkable degree. Volcanism in both areas changed from silicic pyroclastic activity in the Oligocene to eruption of greater quantities of lavas of increasingly more mafic composition from Miocene to Quaternary times. One major difference between the eruptive history of the two areas is the extrusion of sanidine-phyric rhyolitic to dacitic lavas and tuffs (unit  $T_{ms}$ , Plate I) in the Willamette Pass area during the early Miocene. No potassic sanidine-bearing units are known in the Belknap-Foley area.

Dacitic to rhyodacitic laharic tuffs and ash-flow tuffs (e.g., P-2 in Table 2) and minor basaltic lavas erupted in the Oligocene over the entire Western Cascade region (unit  $T_{ov}$ , Plate 1). No reliable radiometric dates are available for these tuffs, but overlying lavas have been dated at  $22 \pm 1$  m.y., near Lookout Point, north of the study area (unpublished K/Ar data by University of Utah Research Institute (UURI), Stanley Evans and Duncan Foley, analysts). These eruptions were followed by a period of erosion that produced a steep topography which was filled in by repeated eruptions of lavas and subordinate tuffs during the Miocene. A distinctive series of short flows and ash flows of sanidine-bearing rhyolitic rocks lies at the base of the Miocene section (unit  $T_{ms}$ , Plate I). These rhyolitic rocks are not present north of the area and are overlain by a thick stack of Miocene lavas of intermediate to mafic composition (unit  $T_{mv}$ , Plate I). Numerous plug domes of units  $T_{ms}$  and  $T_{mv}$ , including some dioritic intrusions (unit  $T_{md}$ , Plate I), mark old volcanic centers throughout the area. The Fall Creek mining district on the northern margin of the area has a high concentration of these intrusive bodies. Unit  $T_{ms}$  has been dated at  $21.3 \pm 1.0$  m.y. and  $18.7 \pm 0.9$  m.y., whereas a basaltic lava of unit  $T_{mv}$  was  $17.3 \pm 0.7$  m.y. old (Table 1; unpublished K/Ar data by UURI, Evans and Foley, analysts).

Table 2. Bulk chemical composition of selected rocks of Willamette Pass area. (Letters at top of each column indicate sample number and map symbol for stratigraphic unit. All values are in weight percent.)


| <u>Compo-</u><br><u>nent</u>   | *P-1<br>Tms | P-2<br>Tov      |
|--------------------------------|-------------|-----------------|
| SiO <sub>2</sub>               | 69.20       | 71.00           |
| TiO <sub>2</sub>               | 0.58        | 0.38            |
| Al <sub>2</sub> O <sub>3</sub> | 14.70       | 14.80           |
| Fe <sub>2</sub> O <sub>3</sub> | 2.80        | 2.00            |
| FeO                            | 1.30        | 0.49            |
| MnO                            | 0.08        | 0.01            |
| MgO                            | 0.62        | 0.49            |
| CaO                            | 2.10        | 1.80            |
| Na <sub>2</sub> O              | 4.90        | 3.80            |
| K <sub>2</sub> O               | 2.60        | 3.60            |
| P <sub>2</sub> O <sub>5</sub>  | 0.09        | 0.04            |
| H <sub>2</sub> O               | 1.28        | 1.60            |
| CO <sub>2</sub>                | <u>0.14</u> | <u>&lt;0.05</u> |
| Total                          | 100.22      | 99.97           |

\*References: P - from Peck and others, 1964.

Aside from some minor epiclastic sediments, the late Miocene to Quaternary section is completely dominated by mafic lavas. Late Miocene to early Pliocene quartz- and hypersthene-bearing dacites (unit *Tpd*, Plate I) are volumetrically subordinate to overlying Pliocene basaltic to basaltic-andesitic lavas (unit *Tpv*). These distinctive Pliocene lavas generally have diktytaxitic textures and phenocrysts of relatively fresh or moderately iddingsitized olivine. Unit *Tpv* rocks are lithologically similar to Pliocene-Pleistocene basaltic flows of the Basalts of High Prairie (informal name), shown as unit *QTbh* on Plate 1. The Basalts of High Prairie are, however, obviously intracanyon into the Pliocene lavas along the North Fork of the Middle Fork of the Willamette River (Plate 1). The Pliocene and Pleistocene basaltic lavas appear to thicken toward their source in the High Cascades, to the east.

#### Structural geology

Mapped faults in the Willamette Pass area are generally high-angle normal faults with northwesterly trends, although east-west-, northeasterly- and north-trending faults are also common locally (e.g., at Huckleberry Mountain and Squaw Butte, Plate I). These generalizations also apply to the lineament map (Figure 2); a major N. $55^{\circ}$ W.-trending lineament appears on the lineament map following Kitson Ridge and Lookout Point Reservoir (Figure 2). This lineament, which has not, however, been proven to be a fault (Plate I) is the Eugene-Denio lineament, considered by Lawrence (1976) to possibly be the result of right-lateral oblique-slip faulting. Hydrothermal alteration is anomalously intense in Miocene and older rocks along the Eugene-Denio lineament, although such alteration is also present along other lineaments and mapped faults, as well. In any case, none of this alteration affects Pliocene capping lavas along the lineament. Only faults trending nearly north-south to N. $30^{\circ}$ W. and rare east-west faults appear to cut the Pliocene capping lavas (e.g., at Huckleberry Mountain, Plate I). It may be that

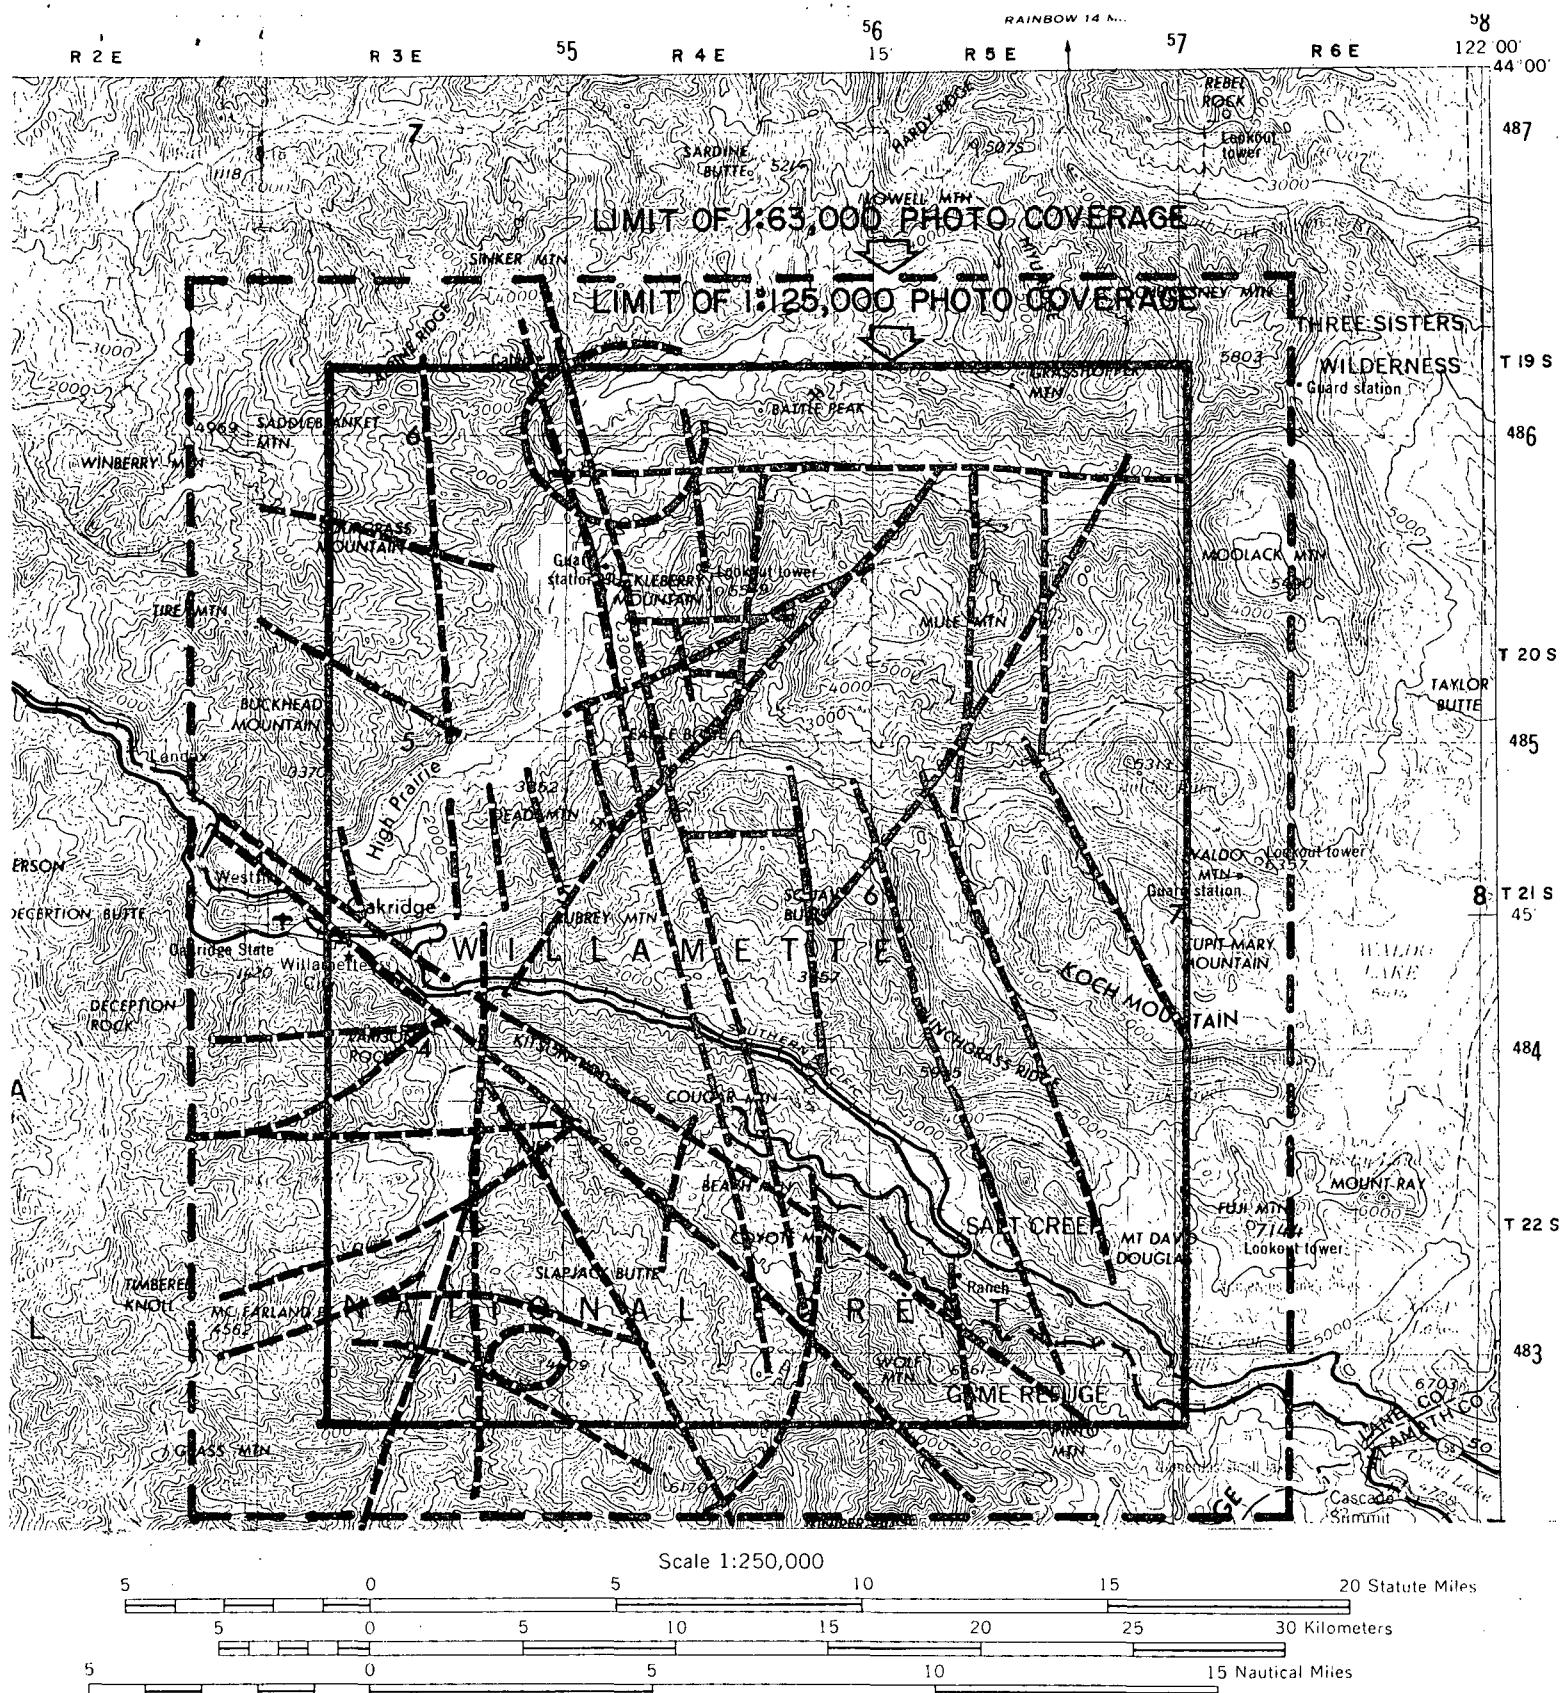

faults subparallel to the Eugene-Denio lineament were active prior to north-south- and east-west-trending faults and prior to the Pliocene.

North-south-trending faults in the Willamette Pass may be cogenetic with similar north-south-trending normal faults in the Belknap-Foley Hot Springs area to the north. The Belknap-Foley area has two major north-south-trending fault zones which appear to control the distribution of hot springs. The most prominent fault zone in the Belknap-Foley area is the western margin of the High Cascades graben (Allen, 1966). Delineation of the High Cascades graben in the Willamette Pass area is, however, not possible, because the study area does not quite overlap what is probably the western topographic scarp of the graben. The topographic margin appears to be approximately at the east sides of Moolack and Waldo Mountains (Figure 2).

#### Relationship of structure to the geothermal systems

All of the thermal springs in the Willamette Pass area are in topographic lows within the Oligocene volcanic sequence (Plate I). All of the thermal springs are also on or near major lineaments or mapped faults. Kitson Hot Springs is located on the Eugene-Denio lineament where east-west- and northeast-trending lineaments intersect (Figure 2). A major north-trending lineament passes by McCredie Hot Springs, and mapped faults trending west-northwest and northeast intersect at the Wall Creek warm springs (Plate I).


It may be that some degree of fracture permeability is essential for passage of geothermal water. The bedrock host for the hot springs in every case is relatively highly altered Oligocene volcanic rock. The altered rocks generally have low permeability, as demonstrated by past experience with wells in the area. Enhancement of permeability by pervasive fracturing may be necessary to create geothermal aquifers in this area.

## GEOPHYSICS

Two geophysical studies were available for evaluation in this report. A regional aeromagnetic study (Figure 3) which was performed by the Oregon State University Geophysics Group is discussed in detail by Couch (1978) and Connard (1980). This study, in general, seems to indicate a close correspondence between magnetic maxima and topographic highs in the Willamette Pass area. This correspondence is probably because the Pliocene and Pleistocene units found capping the ridges tend to have a higher proportion of magnetically susceptible minerals than the older, underlying Miocene and Oligocene rocks.

Site-specific interpretations of the aeromagnetic data for the study area are not obvious. However, regional interpretation by Couch (1978) and Connard (1980) indicates a possible north-south-striking fault with east side down in the approximate location of the Hills Creek Reservoir-Flat Creek fault zone. The motion on this fault zone, however, was mapped in this study as east side up, based on relative offset of units. A second fault has been placed by Couch (1978) and Connard (1980) along the Eugene-Denio lineament (Lawrence, 1976), who have inferred a right-lateral motion using offsets of magnetic anomalies to the east. The depth to Curie point isotherm ( $\sim 600^{\circ}\text{C}$ ) is also estimated to be greater on the west side of the north-south-striking fault than on the east side. Blackwell and others (1978) present a thermal model of the Cascades which estimates a similar depth to the  $600^{\circ}\text{C}$  isotherm.

The second geophysical study is a regional gravity survey also performed by the Oregon State University Geophysics Group (Couch, 1978; Pitts, 1979). This study (Figures 4 and 5) is presented as both a complete Bouguer gravity anomaly map and a residual anomaly map, both of which are discussed in detail by Couch (1978) and Pitts (1979). The main feature of both these maps is the steep gravity

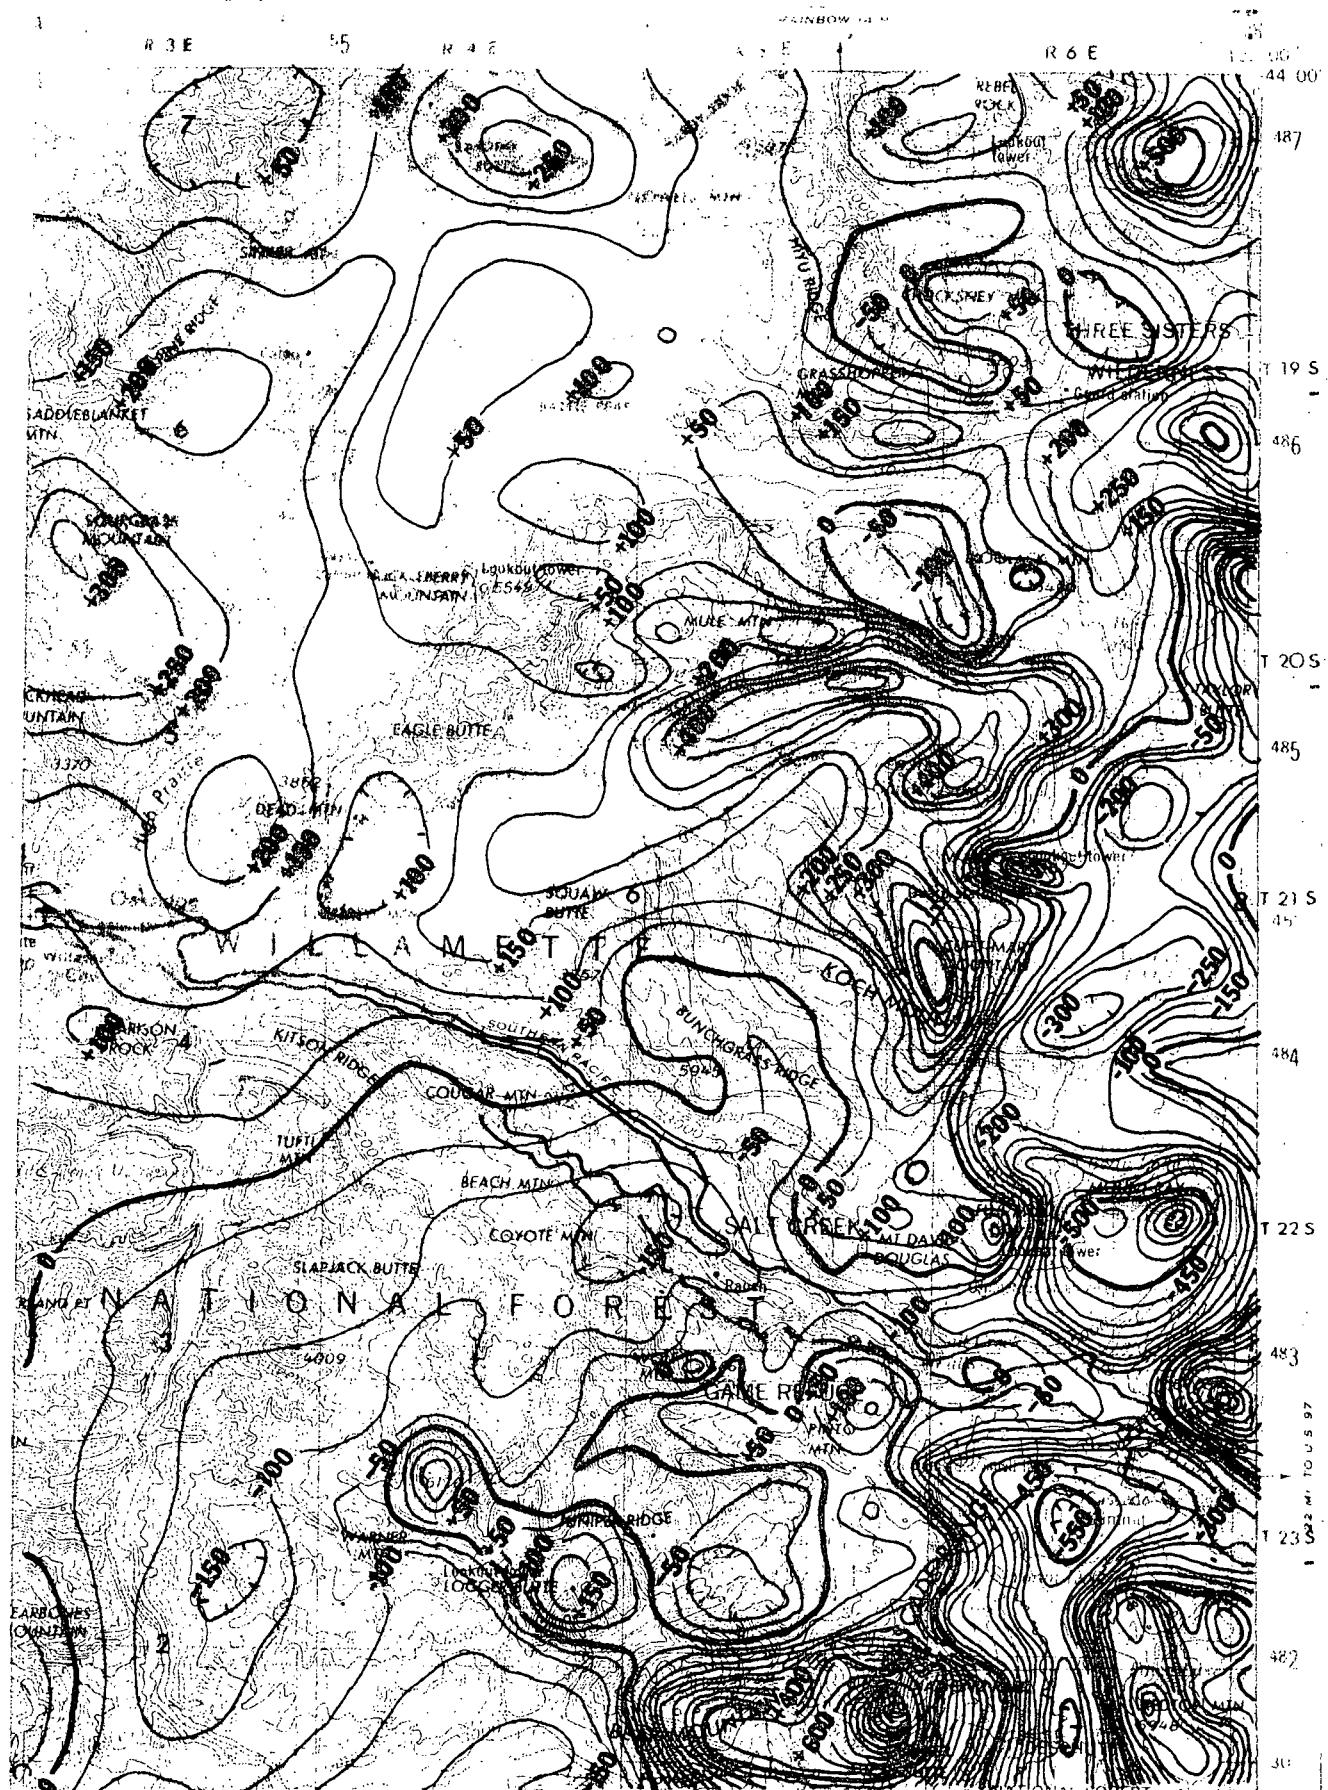

Scale 1:250,000  
ROSEBURG, OREGON

1958  
REVISED 1970

CONTOUR INTERVAL 200 FEET

Figure 3. TOTAL FIELD AEROMAGNETIC ANOMALY MAP  
(From Connard, 1980) Contour interval 50 gammas

I.G.R.F. 1975  
Data reference elevation 9,000 ft  
Cutoff wavelength 15 km

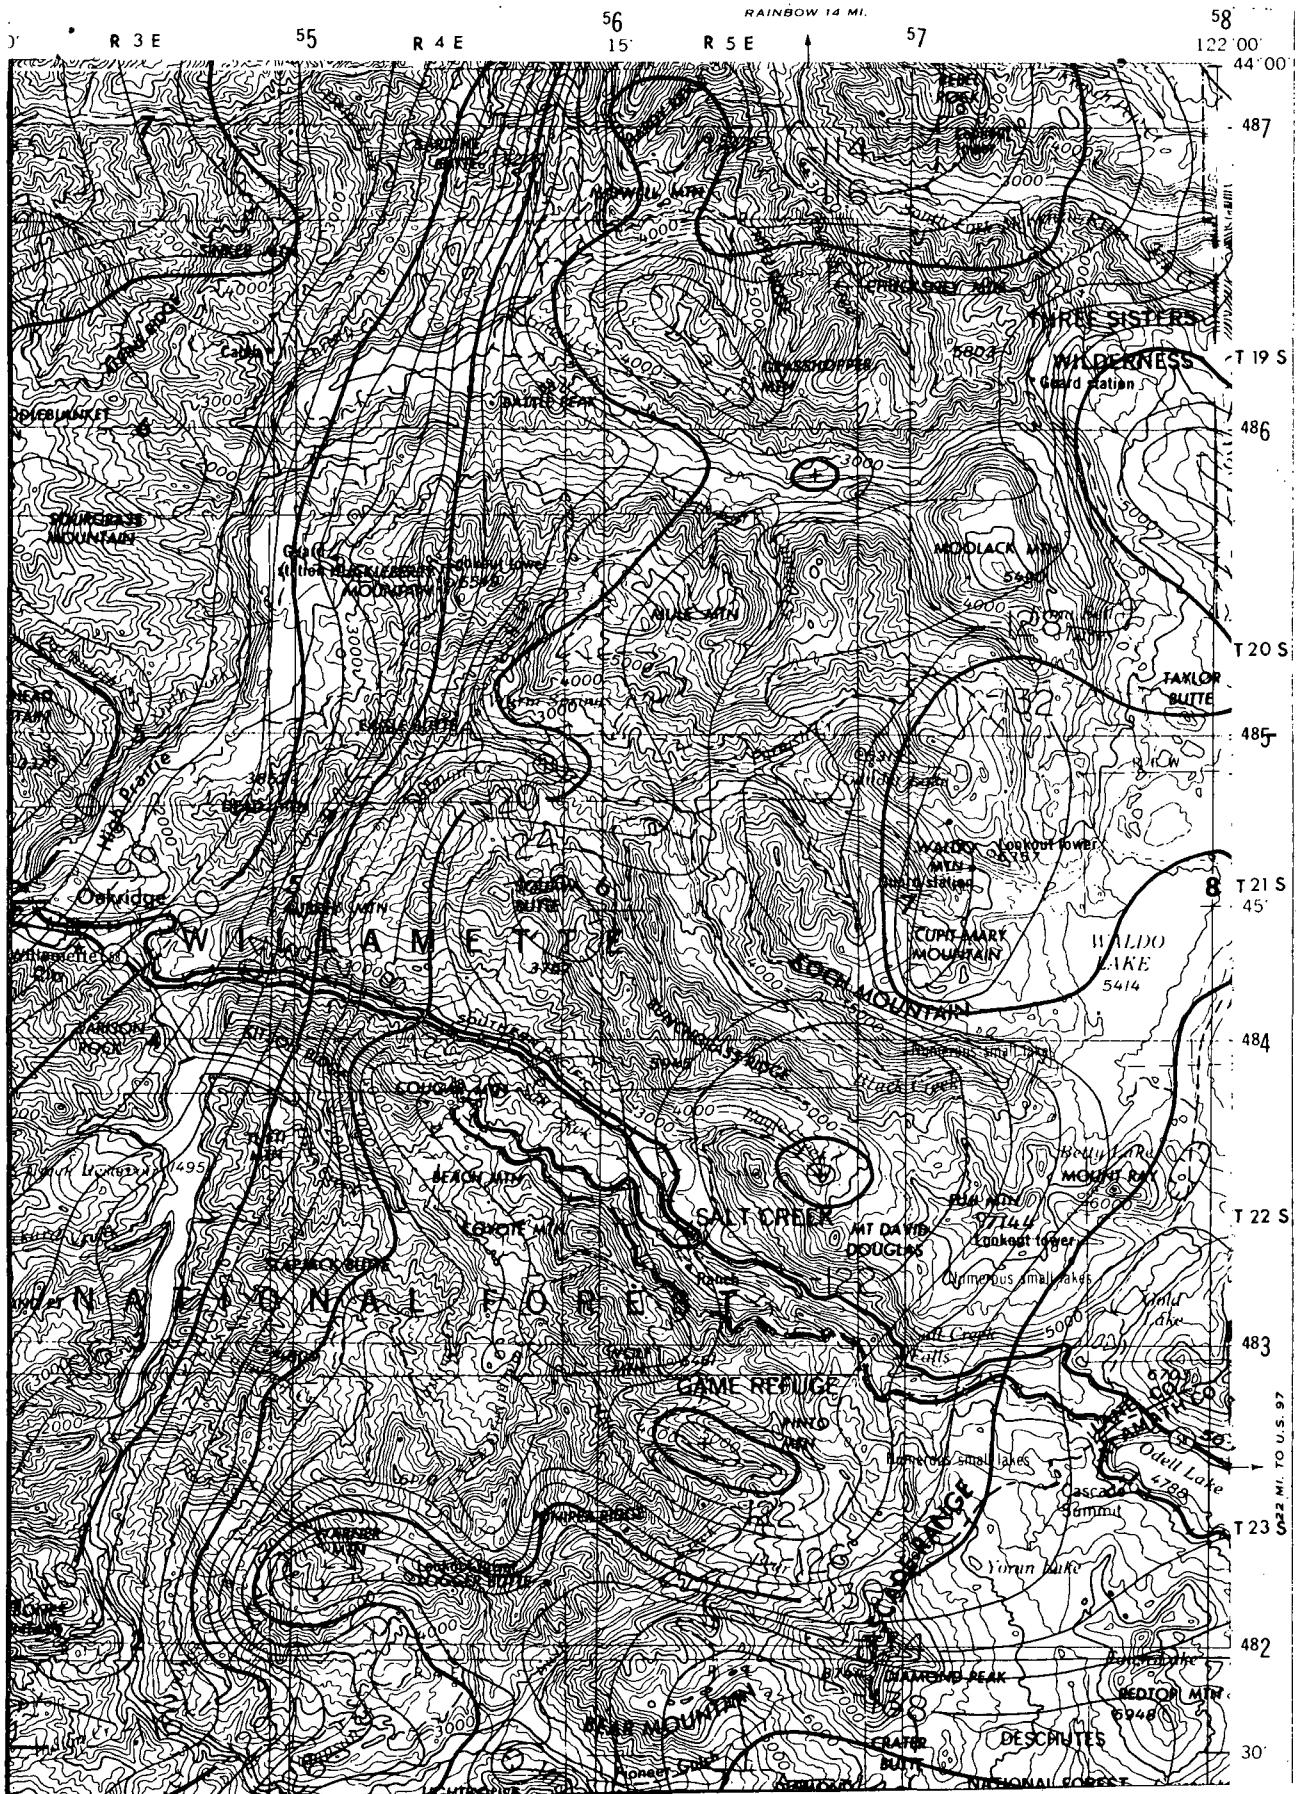


Figure 4. COMPLETE BOUGUER ANOMALY MAP OF WILLAMETTE PASS AREA  
 (From Pitts and Couch, 1978) Contour interval 2.0 mgal

Estimated uncertainty 1.0 mgal

Reduction density 2.67 g/cm<sup>3</sup>


Reduction density 2.07 g/cm  
Transverse Mercator Projection

Theoretical gravity: IGF (1930)

ROSEBURG, OREGON

1958

REVISED 1970

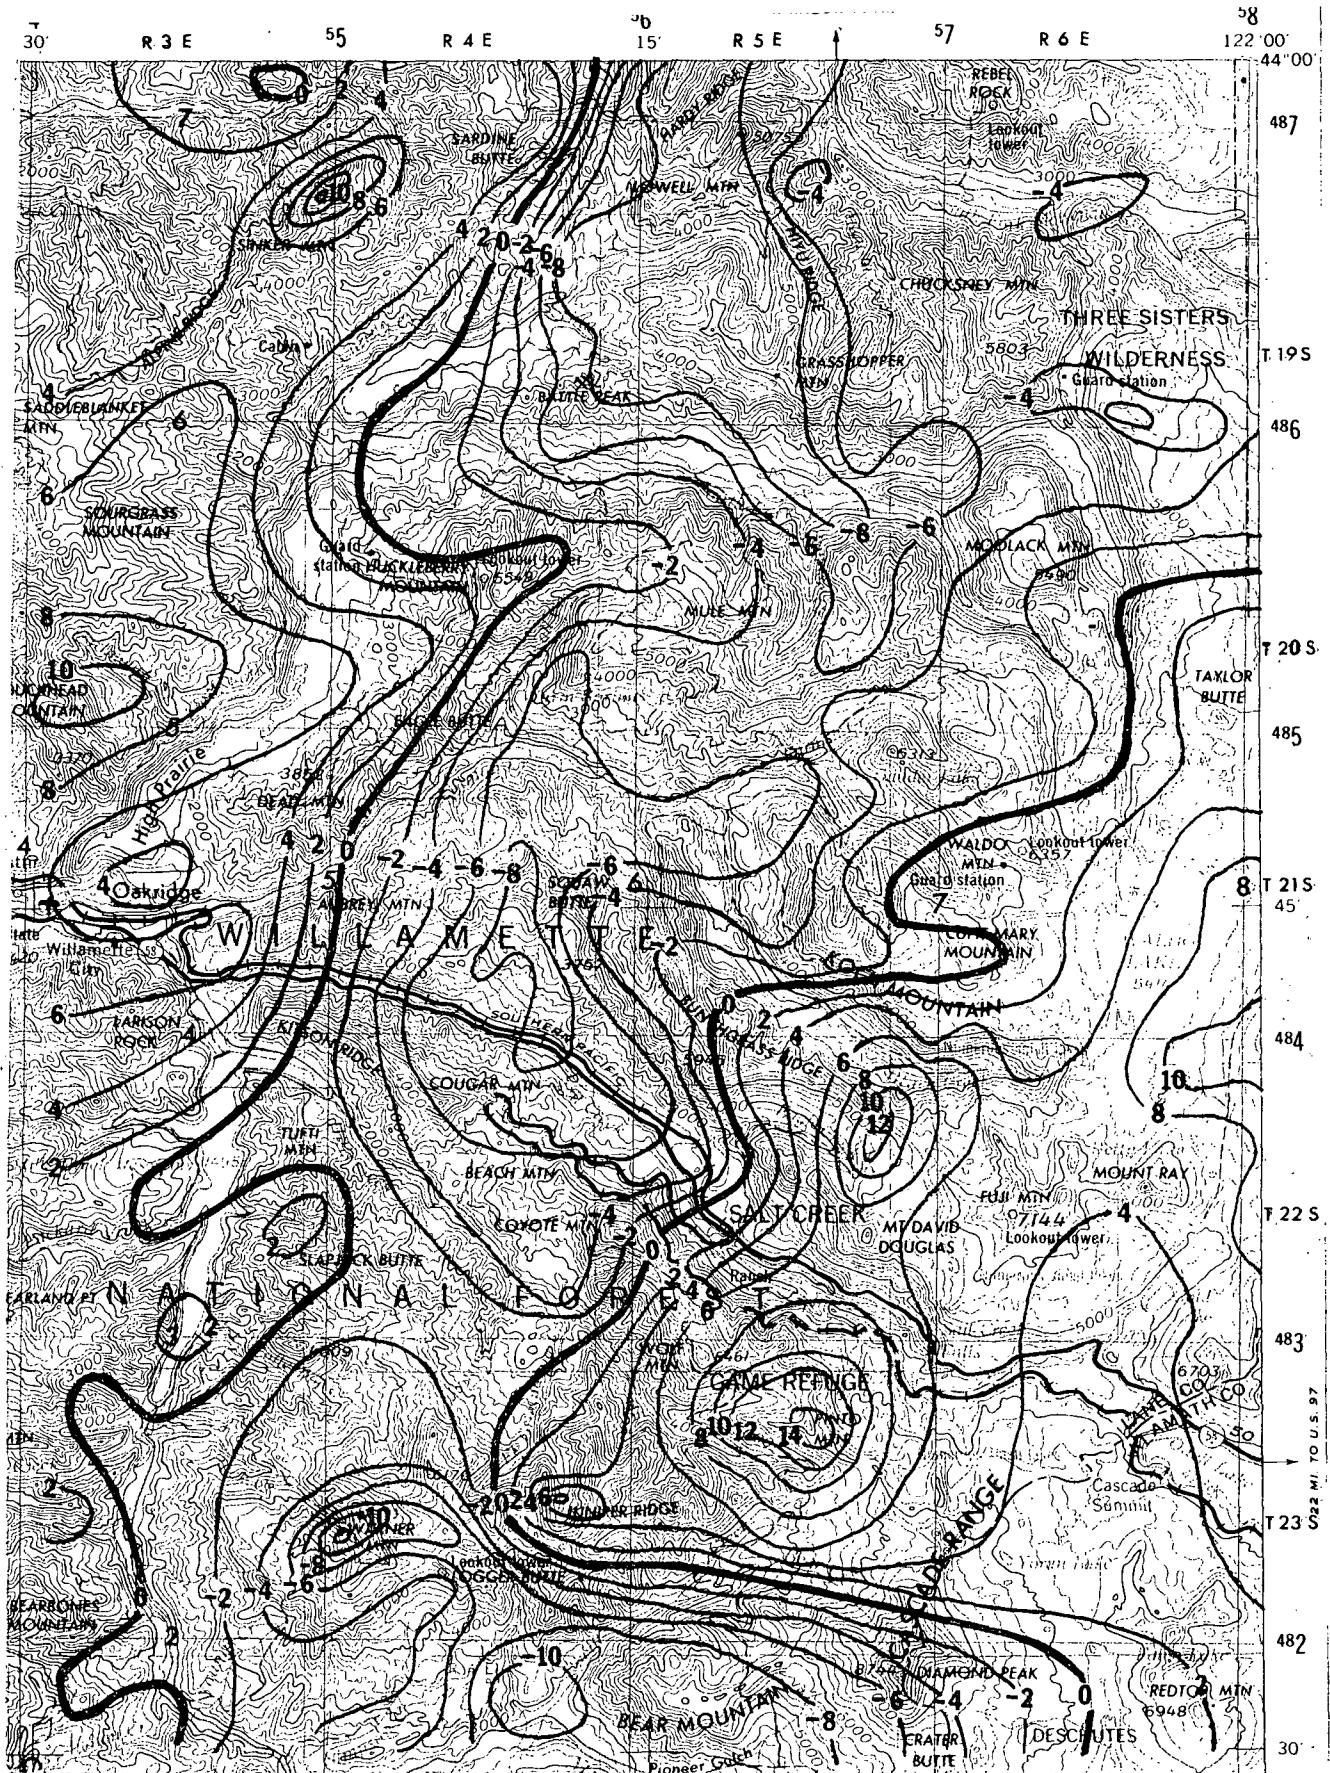

Scale 1:250,000  
 0  
 5 0

Figure 5. RESIDUAL GRAVITY ANOMALY MAP OF WILLAMETTE PASS AREA  
 (From Pitts, 1979) Contour interval 2.0 mgal

ROSEBURG, OREGON

1958  
 REVISED 1970

Estimated uncertainty 1.0 mgal  
 Reduction density 2.43 g/cm<sup>3</sup>  
 Regional components greater than 895 km removed.  
 Transverse Mercator Projection  
 Theoretical gravity: IGF (1930)

gradient coincident with the Hills Creek Reservoir-Flat Creek fault zone and the location of local thermal springs and wells. Pitts (1979) and Couch (1980) interpret this anomaly to represent either a large graben-bounding fault zone with east side down, an area of shallow silicic intrusives, or a possible combination of both. Detailed geologic mapping and possibly deep drilling is needed to further refine geologic modeling based on the geophysical studies in this report.

## WATER CHEMISTRY

During the period of this study, eight springs, wells, and geothermal-gradient holes were sampled and their waters analyzed. Together with published analyses (Mariner and others, 1974; Mariner and others, 1980), a total of eighteen analyses were available for evaluation (Table 3). The analyses were then used to calculate minimum reservoir temperatures (Table 4), using standard formulae for geothermometry which are included, together with references, as Appendix A. Preliminary evaluation of available data indicates that the thermal waters can be best described as a neutral to mildly alkaline, saline, carbonate water generally diagnostic of a hot-water-dominated system at depth. Calculated reservoir temperatures indicate subsurface temperatures are in the moderate range ( $80\text{-}120^{\circ}\text{C}$ ), which is typical of other areas in the Cascades. Geochemical and geologic controls of the geothermal system are not obvious; however, a pattern of increasing ion concentrations is seen from north to south (i.e., from Wall Creek Springs, to McCredie Springs, to Kitson Springs and Saline Well). Ionic concentration increases are apparent in total dissolved solids, sodium, potassium, calcium, ammonia, and chloride. No explanation is apparent from preliminary examination of the analyses; however, this increase may indicate a larger contribution to the thermal waters from connate water trapped in Eocene sediments found at depth. This depth to sediments may be relatively more shallow than in the northern parts of the Cascades, which may be the reason for the relatively high abundance of salt springs and "soda" springs found in the southern Cascades. Any further geochemical modeling is dependent on the collection and analysis, including gas and isotopic studies, of samples from more springs and wells.

Table 3. Spring and well chemistry of the Willamette Pass area. All measurements are in mg/l, except for pH or as indicated. nt = not tested; tr = trace.

|   | <u>McCredie<br/>Springs #1</u> | <u>McCredie<br/>Springs #1</u> | <u>McCredie<br/>Springs #3</u> | <u>McCredie<br/>Springs #2</u> | <u>Wall Creek<br/>Springs</u> |
|---|--------------------------------|--------------------------------|--------------------------------|--------------------------------|-------------------------------|
| Location  | 21S/4E/36Bc                    | 21S/4E/36Bc                    | 21S/4E/36Bc                    | 21S/4E/36Bc                    | 20S/4E/26Bc                   |
| Date sampled  | '74                            | 10/76                          | 10/76                          | 8/80                           | 3/76                          |
| Temp. (°C)  | 73.0                           | 71.0                           | 66.0                           | 62.0                           | 41.0                          |
| pH  | 7.3                            | 7.4                            | 7.4                            | 7.2                            | 7.2                           |
| Conductance<br>μmhos/cm   | 6730                           | 6770                           | 6800                           | 6750                           | 2340                          |
| Alkalinity<br>$X_h$ as mg/l $\text{HCO}_3$<br>$X_c$ as mg/l $\text{CaCO}_3$ | 21 <sub>h</sub>                | 16 <sub>c</sub>                | 16 <sub>c</sub>                | 16 <sub>c</sub>                | 34 <sub>c</sub>               |
| Hardness<br>as mg/l $\text{CaCO}_3$   | nt                             | 1380                           | 1364                           | nt                             | nt                            |
| Total dissolved<br>solids   | nt                             | 4420                           | 4584                           | 4200                           | 1461                          |
| $\text{SiO}_2$  | 79                             | 65                             | 71.8                           | 78.4                           | 63                            |
| Na  | 1000                           | 910                            | 915                            | 885                            | 315                           |
| K   | 22.0                           | 28.0                           | 27.6                           | 21.8                           | 11.0                          |
| Ca  | 460                            | 500                            | 495                            | 456                            | 130                           |
| Mg  | 0.9                            | 0.9                            | 1.1                            | 2.42                           | 1.0                           |
| Cl  | 2200                           | 2232                           | 2308                           | 2030                           | 602                           |
| As  | nt                             | 0.08                           | 0.07                           | 0.11                           | 0.07                          |
| B   | 18.0                           | 17.8                           | 19.5                           | 9.91                           | 6.6                           |
| Li  | 1.40                           | 1.98                           | 2.0                            | 1.48                           | 0.57                          |
| F   | 2.70                           | 2.68                           | 2.86                           | 2.3                            | 4.1                           |
| Fe (total)  | 0.02                           | 0.1                            | 0.1                            | 0.43                           | 0.05                          |
| Al  | 0.01                           | tr                             | tr                             | 0.47                           | tr                            |
| $\text{HCO}_3$  | nt                             | 20                             | 20                             | nt                             | nt                            |
| $\text{PO}_4$   | 0.61                           | 0.11                           | 0.22                           | nt                             | 0.16                          |
| $\text{SO}_4$   | 240                            | 185                            | 218                            | 271                            | 108                           |
| $\text{NO}_3$   | nt                             | tr                             | tr                             | nt                             | nt                            |
| $\text{NH}_3$   | 0.26                           | 0.21                           | 0.14                           | nt                             | 0.1                           |

Table 3. Spring and well chemistry of the Willamette Pass area--Continued.  
 All measurements are in mg/l, except for pH or as indicated. nt = not tested;  
 tr = trace.

|   | <u>Wall Creek<br/>Springs</u> | <u>Kitson<br/>Springs</u> | <u>Kitson<br/>Springs</u> | <u>Kitson<br/>Springs</u> | <u>Kitson<br/>Brine well</u> |
|---|-------------------------------|---------------------------|---------------------------|---------------------------|------------------------------|
| Location  | 20S/4E/26Bc                   | 22S/4E/6Add               | 22S/4E/6Add               | 22S/4E/6Add               | 22S/4E/6Add                  |
| Date sampled  | 8/80                          | 3/58                      | 5/78                      | 8/79                      | '78                          |
| Temp. (°C)  | 40.0                          | 44.4                      | 43.0                      | 44.0                      | nt                           |
| pH  | 7.6                           | 7.4                       | 7.3                       | 6.8                       | 6.8                          |
| Conductance<br>μhos/cm  | 2288                          | 10500                     | 10100                     | 10500                     | 10000                        |
| Alkalinity<br>$X_h$ as mg/l HCO <sub>3</sub><br>$X_c$ as mg/l CaCO <sub>3</sub> | 35 <sub>c</sub>               | nt                        | 24 <sub>h</sub>           | 18 <sub>c</sub>           | nt                           |
| Hardness<br>as mg/l CaCO <sub>3</sub>   | nt                            | nt                        | nt                        | 1900                      | 1900                         |
| Total dissolved<br>solids   | 1500                          | 6340                      | nt                        | 5930                      | 5000                         |
| SiO <sub>2</sub>  | 73.2                          | 47                        | 45                        | 47                        | nt                           |
| Na  | 299                           | 1450                      | 1500                      | 1450                      | nt                           |
| K   | 8.5                           | 28                        | 26                        | 28                        | nt                           |
| Ca  | 114                           | 726                       | 710                       | 726                       | nt                           |
| Mg  | 0.53                          | 5.7                       | 1.6                       | 5.7                       | nt                           |
| Cl  | 600                           | 3420                      | 3450                      | 3420                      | nt                           |
| As  | 0.07                          | nt                        | nt                        | 0.26                      | 0.26                         |
| B   | nt                            | 25                        | 22                        | 25                        | nt                           |
| Li  | 0.43                          | 1.8                       | 2.0                       | 2.02                      | nt                           |
| F   | 4.0                           | 2.8                       | 2.4                       | 2.6                       | nt                           |
| Fe (total)  | 0.32                          | 0.01                      | 0.04                      | 2.0                       | 2.0                          |
| Al  | 0.52                          | 0.27                      | tr                        | 0.14                      | nt                           |
| HCO <sub>3</sub>  | nt                            | 27                        | nt                        | 27                        | nt                           |
| PO <sub>4</sub>   | nt                            | 0.54                      | nt                        | nt                        | nt                           |
| SO <sub>4</sub>   | 160                           | 197                       | 210.0                     | 197                       | nt                           |
| NO <sub>3</sub>   | 0.02                          | 2.7                       | nt                        | nt                        | nt                           |
| NH <sub>3</sub>   | nt                            | nt                        | nt                        | nt                        | nt                           |

Table 3. Spring and well chemistry of the Willamette Pass area--Continued.  
 All measurements are in mg/l, except for pH or as indicated. nt = not tested;  
 tr = trace.

|  | <u>Kitson<br/>Brine well</u> | <u>Salt<br/>Spring</u> | <u>Hills Creek<br/>Drill hole<br/>90 ft-410 ft</u> | <u>Oakridge #1<br/>Drill hole<br/>670 ft</u> |
|--|------------------------------|------------------------|--|--|
| Location                                     | 22S/4E/6Add                  | 21S/3E/17Cd            | 21S/3E/26Caa                                       | 21S/3E/17D aa                                |
| Date sampled                                 | 8/80                         | 6/79                   | 8/80   | 8/80   |
| Temp. ( $^{\circ}$ C)                        | 30.0                         | 18.0                   | 14.5   | 22.1   |
| pH   | 8.75                         | 7.4                    | 8.75   | 7.45   |
| Conductance<br>$\mu$ mhos/cm                 | 10300                        | 8800                   | nt   | 8500   |
| Alkalinity<br>$X_h$ as mg/l $\text{HCO}_3^-$ | nt                           | 365 <sub>c</sub>       | nt   | nt   |
| $X_h$ as mg/l $\text{CaCO}_3$                |                              |                        |  |  |
| Hardness<br>as mg/l $\text{CaCO}_3$          | 1165                         | 1433                   | 154  | 1477   |
| Total dissolved<br>solids                    | 6214                         | 5300                   | 424  | 5028   |
| $\text{SiO}_2$                               | 13(?)                        | 29                     | 21   | 3(?)   |
| Na   | 1573                         | 1250                   | 39   | 1344   |
| K  | 10                           | 45.8                   | <2.50  | 24   |
| Ca   | 848                          | 490                    | 28   | 466  |
| Mg   | 2                            | 51                     | 9  | 40   |
| Cl   | 3423                         | 2800                   | 105  | 2676   |
| As   | <0.625                       | 0.01                   | <0.625   | <0.625                                       |
| B  | 20.3                         | 10.5                   | 0.3  | 6.9  |
| Li   | 2.05                         | 0.93                   | <0.050   | <0.050                                       |
| F  | 2.0                          | 3.7                    | 0.4  | <0.1   |
| Fe (total)                                   | <0.025                       | 21.7                   | <0.025   | <0.025                                       |
| Al   | <0.625                       | 0.26                   | <0.625   | <0.625                                       |
| $\text{HCO}_3^-$                             | nt                           | nt                     | nt   | nt   |
| $\text{PO}_4^{4-}$                           | nt                           | nt                     | nt   | nt   |
| $\text{SO}_4^{2-}$                           | 193                          | 82.9                   | 145  | 170  |
| $\text{NO}_3^-$                              | nt                           | nt                     | nt   | nt   |
| $\text{NH}_3$                                | 1.2                          | 3.46                   | 0.1  | 0.8  |

Table 3. Spring and well chemistry of the Willamette Pass area--Continued.  
All measurements are in mg/l, except for pH or as indicated. nt = not tested;  
tr = trace.

|  | <u>Black Creek<br/>Drill Hole</u> | <u>Christy Creek<br/>Drill Hole</u> | <u>Wall Creek<br/>Drill Hole</u> | <u>Brock Creek<br/>Drill Hole</u> |
|--|-----------------------------------|-------------------------------------|----------------------------------|-----------------------------------|
| Location                                   | 21S/5E/16Acd                      | 19S/4E/29Ccb                        | 20S/4E/27Ddd                     | 19S/5E/27Bcc                      |
| Date sampled                               | 6/10/80                           | 7/1/80                              | 6/3/80                           | 6/5/80                            |
| Temp. ( $^{\circ}$ C)                      | 8.47                              | 16.89                               | 18.94                            | 16.23                             |
| pH   | 7.58                              | 7.23                                | 8.27                             | 8.61                              |
| Conductance<br>$\mu\text{mhos}/\text{cm}$  | 89.5                              | 106                                 | 17200                            | 250                               |
| Alkalinity<br>$X_h$ as mg/l $\text{HCO}_3$ | nt                                | nt                                  | nt                               | nt                                |
| $X_c$ as mg/l $\text{CaCO}_3$              |                                   |                                     |                                  |                                   |
| Hardness<br>as mg/l $\text{CaCO}_3$        | 42.8                              | 34.2                                | 68.4                             | 17.1                              |
| Total dissolved<br>solids                  | 86                                | 116                                 | 966                              | 88                                |
| $\text{SiO}_2$                             | 25*                               | 21*                                 | 23*                              | 22*                               |
| Na   | 6                                 | 11                                  | 335                              | 4                                 |
| K  | <2.50                             | <2.50                               | <2.50                            | <2.50                             |
| Ca   | 10                                | 7                                   | 26                               | 8                                 |
| Mg   | 4                                 | 3                                   | <0.500                           | 3                                 |
| Cl   | 15.2                              | 7.58                                | 579.0                            | 15.2                              |
| As   | <0.625                            | <0.625                              | <0.625                           | <0.625                            |
| B  | <0.125                            | <0.125                              | 6.0                              | <0.125                            |
| Li   | <0.050                            | <0.050                              | <0.050                           | <0.050                            |
| F  | <0.1                              | 0.1                                 | 3.5                              | <0.1                              |
| Fe (total)                                 | 0.99                              | 0.34                                | 0.04                             | 0.14                              |
| Al   | 0.7                               | <0.625                              | <0.625                           | <0.625                            |
| $\text{HCO}_3$                             | nt                                | nt                                  | nt                               | nt                                |
| $\text{PO}_4$                              | nt                                | nt                                  | nt                               | nt                                |
| $\text{SO}_4$                              | <2                                | 4                                   | 83                               | <2                                |
| $\text{NO}_3$                              | nt                                | nt                                  | nt                               | nt                                |
| $\text{NH}_4$                              | nt                                | 0.4                                 | 0.2                              | 0.3                               |

\*Results may reflect a loss of  $\text{SiO}_2$  due to sampling technique and delayed filtering of sample.

Table 4. Geothermetric calculations\* of minimum reservoir temperatures for selected thermal waters of the Willamette Pass area

|                                      | Kitson<br>Springs | Kitson<br>Springs | Kitson<br>Springs | McCredie<br>Springs<br>#1 | McCredie<br>Springs<br>#1 | McCredie<br>Springs #3 |
|--------------------------------------|-------------------|-------------------|-------------------|---------------------------|---------------------------|------------------------|
| Flow rate<br>liters/min.             | 66                | 50                | 50                | 50                        | 50                        | 76                     |
| Measured<br>temperature<br>°C        | 44.4              | 43                | 44                | 73                        | 71                        | 66                     |
| Na:K<br>°C                           | 82                | 77                | 81                | 88                        | 104                       | 103                    |
| Na:K:Ca<br>1/3 β<br>°C               | 110               | 107               | 102               | 114                       | 125                       | 125                    |
| Na:K:Ca<br>4/3 β<br>°C               | 83                | 81                | 83                | 81                        | 86                        | 86                     |
| Na:K:Ca<br>Mg corrected<br>°C        | NC                | 71                | NC                | 74                        | 84                        | NC                     |
| SiO <sub>2</sub><br>conductive<br>°C | 99                | 97                | 99                | 124                       | 115                       | 113                    |
| SiO <sub>2</sub><br>adiabatic<br>°C  | 100               | 98                | 99                | 122                       | 114                       | 112                    |
| SiO <sub>2</sub><br>chalcedony<br>°C | 69                | 67                | 69                | 96                        | 86                        | 84                     |
| SiO <sub>2</sub><br>opal<br>°C       | -16               | -18               | -16               | 6                         | -3                        | 1                      |

\*Methodology for calculations presented in Appendix A. NC = not calculated.

Table 4. Geothermetric calculations\* of minimum reservoir temperatures for selected thermal waters of the Willamette Pass area -- Continued

|                                      | McCredie<br>Springs #2 | Wall<br>Creek<br>Springs | Salt<br>Spring | Black<br>Creek<br>Drill<br>Hole | Christy<br>Drill<br>Hole | Wall<br>Creek<br>Drill<br>Hole | Brock<br>Creek<br>Drill<br>Hole |
|--------------------------------------|------------------------|--------------------------|----------------|---------------------------------|--------------------------|--------------------------------|---------------------------------|
| Flow rate<br>liter/min.              | 50                     | 11                       | 2              | 13                              | pumped                   | pumped                         | pumped                          |
| Measured<br>temperature<br>°C        | 62                     | 41                       | 18             | 8.5                             | 16.89                    | 18.94                          | 8.61                            |
| Na:K<br>°C                           | 104                    | 110                      | 66             | NC                              | NC                       | NC                             | NC                              |
| Na:K:Ca<br>1/3 β<br>°C               | 126                    | 125                      | 138            | NC                              | NC                       | NC                             | NC                              |
| Na:K:Ca<br>4/3 β<br>°C               | 87                     | 73                       | 108            | NC                              | NC                       | NC                             | NC                              |
| Na:K:Ca<br>Mg corrected<br>°C        | NC                     | NC                       | 105            | NC                              | NC                       | NC                             | NC                              |
| SiO <sub>2</sub><br>conductive<br>°C | 124                    | 120                      | 78             | 72 (?)                          | 65 (?)                   | 69 (?)                         | 67 (?)                          |
| SiO <sub>2</sub><br>adiabatic<br>°C  | 122                    | 118                      | 82             | 77 (?)                          | 71 (?)                   | 74 (?)                         | 72 (?)                          |
| SiO <sub>2</sub><br>chalcedony<br>°C | 95                     | 92                       | 46             | 40 (?)                          | 33 (?)                   | 37 (?)                         | 35 (?)                          |
| SiO <sub>2</sub><br>opal<br>°C       | 25                     | -5                       | -17            | -39 (?)                         | -45 (?)                  | -42 (?)                        | -43 (?)                         |

\*Methodology for calculations presented in Appendix A. NC = not calculated.

## GEOTHERMAL-GRADIENT AND HEAT-FLOW DATA\*

The temperature-gradient and heat-flow results for the Willamette Pass area are shown in Table 5. Included in the table are the township/range-section and latitude and longitude location of each hole for which temperature data are available. In addition, the hole name, date of logging used, and collar elevation are included for each hole. The bottom hole temperature, maximum depth, corrected temperature gradient, and, where available, corrected heat flow are printed in blue on Plate I. These values are also listed in the table, as are the depth interval and average thermal conductivity used for calculation of the gradient and heat flow. The values are given in SI units. To transform units, the following conversion factors were used:  $1 \times 10^{-6} \text{ cal/cm}^2\text{sec}$  (HFU) =  $41.84 \text{ mWm}^{-2}$ ,  $1 \times 10^{-3} \text{ cal/cm sec}^{\circ}\text{C}$  (TCU) =  $0.4184 \text{ Wm}^{-1}\text{K}^{-1}$ , and  $1^{\circ}\text{C}/\text{km} = 1 \text{ mKm}^{-1} = 18.2^{\circ}\text{F}/100 \text{ ft}$ . Corrected gradient and corrected heat flow are values for which the topographic effects have been removed. These are significant for many of the sites studied.

The holes are ranked in terms of the quality of the gradient or heat-flow information: high quality (A), good quality (B), marginal quality (C), data with some problems (D), and data for which no useful temperature gradient or heat flow can be estimated (X). All thermal-conductivity measurements were made on cutting samples. Most of the holes shown on the table were drilled specifically for heat-flow studies, and so the data quality is relatively high. In general, holes drilled in the Western Cascade rocks give linear gradients below near-surface effects that may vary in depth from 20 to 100 m. Holes 50-150 m deep in High Cascade rocks, such as 21S/5E-16Acd, are often isothermal because of lateral flow of water in the porous young volcanic rocks.

\*By D. D. Blackwell, Southern Methodist University, Dallas, Texas.

Table 5. Geothermal-gradient data, Willamette Pass area, Oregon

| Twn/Rng-<br>Section | N Lat.<br>Deg. Min. | W Long<br>Deg. Min. | Hole #<br>Date       | Collar<br>Elev. | Bottom<br>Temp.<br>(°C) | Depth<br>Interval<br>(m) | Avg.<br>Wm <sup>-1</sup> K <sup>-1</sup> | #<br>TC | Uncorr.<br>Gradient<br>°C/km | Corr.<br>Gradient<br>°C/km | Corr.<br>HF<br>mWm <sup>-2</sup> | Q<br>HF |
|---------------------|---------------------|---------------------|----------------------|-----------------|-------------------------|--------------------------|--|---------|------------------------------|----------------------------|----------------------------------|---------|
| 19S/ 6E-<br>8BA     | 43-56.96            | 122- 1.85           | ELK CRK<br>7/ 9/80   | 877             | 18.23                   | 40.0<br>135.0            | 1.22<br>.04                              | 10      | 43.2<br>1.0                  | 33.3                       | 41                               | B       |
| 19S/ 5E-<br>27BCC   | 43-53.31            | 122-12.61           | BRCK CRK<br>7/31/80  | 987             | 16.23                   | 135.0<br>154.0           | 1.75<br>.09                              | 3       | 65.8<br>.4                   | 65.6                       | 115                              | B       |
| 19S/ 4E-<br>29CCB   | 43-53.00            | 122-16.47           | CHRS CRK<br>7/31/80  | 579             | 16.89                   | 70.0<br>154.0            | 1.75<br>.09                              | 4       | 64.0<br>1.1                  | 52.3                       | 92                               | B       |
| 19S/ 6E-<br>25DCD   | 43-52.95            | 122- 4.11           | N FORK<br>7/31/80    | 951             | 18.88                   | 30.0<br>154.0            | 1.35<br>.05                              | 4       | 78.4<br>5.1                  | 67.5                       | 91                               |         |
| 20S/ 3E-<br>26DA    | 43-48.01            | 122-24.95           | CS-WW<br>9/28/76     | 719             | 12.85                   | 45.0<br>70.0<br>140.0    | ( 1.59)<br>( 1.17)                       |         | 25.3<br>1.8                  | 25.1                       | 40                               | B       |
| 20S/ 4E-<br>27DDD   | 43-47.94            | 122-18.83           | WALL CRK<br>7/11/80  | 582             | 17.80                   | 30.0<br>135.0            | 1.13<br>.13                              | 7       | 72.6<br>.9                   | 60.5                       | 69                               | B       |
| 20S/ 3E-<br>26CD    | 43-47.88            | 122-25.18           | AE-WW<br>8/19/76     | 707             | 11.88                   | 10.0<br>80.0<br>125.0    | ( 1.59)<br>( 1.17)                       |         | 25.8<br>.5                   | 25.6                       | 41                               | B       |
| 21S/ 3E-<br>10AD    | 43-45.64            | 122-25.93           | FC-WW<br>9/28/76     | 548             | 13.20                   | 25.0<br>100.0            | ( 1.17)                                  |         | 36.5<br>.5                   | 35.6                       | 42                               | B       |
| 21S/ 5E-<br>16ACD   | 43-44.85            | 122-14.60           | BLOCK CRK<br>8/ 1/80 | 829             | 7.97                    | 45.0<br>104.0            |  |         | 6.2<br>.6                    |                            |                                  | X       |
| 21S/ 3E-<br>17DA    | 43-44.80            | 122-28.25           | OAKR CW6<br>2/21/79  |                 | 17.71                   | 70.0<br>125.0            |  |         | 47.7<br>2.9                  |                            |                                  | C       |
| 21S/ 4E-<br>28AD    | 43-43.15            | 122-19.97           | CR-MCHSE<br>9/29/76  | 533             | 20.98                   | 10.0<br>150.0            | 1.67                                     | 13      | 82.3<br>.4                   | 60.0                       | 101                              | B       |
| 21S/ 3E-<br>35B1    | 43-42.50            | 122-25.50           | DH-Z-5<br>11/25/75   | 413             | 11.02                   | 20.0<br>27.5             |  |         | 52.3<br>1.5                  |                            |                                  | X       |
| 21S/ 3E-<br>35B3    | 43-42.50            | 122-25.50           | DH-Z-2<br>11/25/75   | 459             | 10.45                   | 60.0<br>79.0             |  |         | 5.8<br>.3                    |                            |                                  | X       |

Table 5. Geothermal-gradient data, Willamette Pass area, Oregon--Continued

| Twn/Rng-<br>Section | N Lat.<br>Deg. Min. | W Long<br>Deg. Min. | Hole #<br>Date      | Collar<br>Elev. | Bottom<br>Temp.<br>(°C) | Depth<br>Interval<br>(m) | Avg. TC<br>Wm <sup>-1</sup> K <sup>-1</sup> | #<br>TC | Uncorr.<br>Gradient<br>°C/km | Corr.<br>Gradient<br>°C/km | Corr.<br>HF<br>mWm <sup>-2</sup> | Q<br>HF |
|---------------------|---------------------|---------------------|---------------------|-----------------|-------------------------|--------------------------|---|---------|------------------------------|----------------------------|----------------------------------|---------|
| 21S/ 3E-<br>35B2    | 43-42.50            | 122-25.50           | DH-2-8<br>11/25/75  | 459             | 10.33                   | 55.0<br>63.0             |   |         | 12.7<br>1.1                  |                            |                                  | X       |
| 22S/ 3E-<br>10DDC   | 43-40.26            | 122-27.04           | PCCPG-WW<br>6/28/78 | 490             | 13.98                   | 20.0<br>90.0             | 1.33  | 1       | 39.0<br>.6                   | 40.0                       | 53                               | B       |
| 22S/ 5E-<br>26BC    | 43-38.19            | 122-11.31           | CR-MCHSW<br>9/29/76 | 975             | 15.32                   | 30.0<br>150.0            | 1.97<br>.06                                 | 13      | 54.0<br>.4                   | 51.8                       | 102                              | B       |
| 23S/ 5E-<br>8DAA    | 43-35.48            | 122-14.02           | PNTO CRK<br>8/ 1/80 | 1219            | 16.07                   | 40.0<br>154.0            | 1.52<br>.04                                 | 4       | 83.3<br>3.3                  | 66.1                       | 101                              | B       |

The data fall into two groups: those east of the High Cascade-Western Cascade thermal boundary and those west of the boundary. West of the boundary, heat-flow values generally are below  $55 \text{ mWm}^{-2}$ , while east of the boundary they are generally above  $100 \text{ mWm}^{-2}$  (Blackwell and others, 1978). Typical gradients in the two areas are  $25\text{-}35^{\circ}\text{C/km}$  and  $60\text{-}70^{\circ}\text{C/km}$ , respectively.

## CONCLUSIONS AND RECOMMENDATIONS

Owing to the highly complex nature of the geology of the Willamette Pass, no preliminary geothermal model is presented with this report. Several areas, however, exhibit characteristics which appear to be favorable for geothermal development. They are the Eugene-Denio lineament, the Hills Creek Reservoir-Flat Creek shear zone, and the North Fork shear zone — a geophysical and geological lineament found at the northern boundary of the map. All of these areas show intense faulting and hydrothermal alteration, geophysical anomalies, and, in the case of the Eugene-Denio lineament, some indication of association with present-day active geothermal systems. Of the presently active geothermal systems, McCredie and Kitson Hot Springs are the most economically attractive for low-temperature exploitation, owing to their proximity to the city of Oakridge. Detailed study of these springs is recommended to assess their geothermal energy potential and to provide models for other Western Cascades thermal springs. To accomplish a detailed assessment of the geothermal resources, the following steps are recommended:

1. Detailed mapping (scale of 1:24,000 or greater) of the three major fault zones discussed above -- to identify and evaluate their relation to the geothermal systems.
2. Detailed spring and well sampling and analyses of both hot and cool waters, including isotopic and gas analyses -- to help evaluate precise reservoir conditions.
3. Closely spaced complete Bouguer and residual gravity anomaly studies along fault zones -- to further refine the gravity anomalies found during previous regional studies and to tie anomalies to mapped structures.
4. Resistivity traverses (either dipole-dipole, roving dipole, or telluric) across areas with thermal springs -- to further define the geothermal aquifers and locate areas of thermal upwelling and areas of recharge.

5. A program of ten to fifteen 500-ft gradient/stratigraphy holes, placed at strategic locations -- to complete the evaluation of the Willamette Pass geothermal model, with emphasis to be on detailed heat-flow modeling of thermal springs nearest to the city of Oakridge.
6. Six to eight 2,000-ft gradient/stratigraphy holes -- to evaluate thermal anomalies and directly test geothermal aquifers indicated by resistivity traverses and the shallow heat-flow study, with emphasis to be on areas nearest the city of Oakridge.

## BIBLIOGRAPHY OF THE WILLAMETTE PASS AREA

- Allen, J.E., 1966, The Cascade Range volcano-tectonic depression of Oregon, in Transactions, Lunar Geological Field Conference, Bend, Oreg., August 1965: Oregon Department of Geology and Mineral Industries, p. 21-23.
- Armstrong, R.L., Taylor, E.M., Hales, P.O., and Parker, D.J., 1975, K-Ar dates for volcanic rocks, central Cascade Range of Oregon: Isochron/West, no. 13, p. 5-10.
- Ashwill, W.R., 1951, The geology of the Winberry Creek area, Lane County, Oregon: Eugene, Oreg., University of Oregon master's thesis, 63 p.
- Baldwin, E.M., 1976, Geology of Oregon (revised ed.): Dubuque, Iowa, Kendall/Hunt Publishing Co., 147 p.
- Bales, W.E., 1951, Geology of the lower Brice Creek area, Lane County, Oregon: Eugene, Oreg., University of Oregon master's thesis, 53 p.
- Barnes, C.G., and Ritchey, J.L., 1978, Tectonic implications of structural patterns in the Cascades of southern Oregon (abs): Proceedings of the Oregon Academy of Science, v. 14, p. 141-142.
- Beaulieu, J.D., 1971, Geologic formations of western Oregon (west of longitude  $121^{\circ} 30'$ ): Oregon Department of Geology and Mineral Industries Bulletin 70, 72 p.
- Blackwell, D.D., 1969, Heat flow determinations in the northwestern United States: Journal of Geophysical Research, v. 74, no. 4, p. 997-1007.
- Blackwell, D.D., Hull, D.A., Bowen, R.G., and Steele, J.L., 1978, Heat flow of Oregon: Oregon Department of Geology and Mineral Industries Special Paper 4, 42 p.
- Blackwell, D.D., Steele, J.L., and Riccio, J.F., 1979, Heat flow of the Oregon Cascade Range (abs.): EOS (American Geophysical Union Transactions), v. 60, no. 46, p. 960.
- Bodvarsson, G., Couch, R.W., MacFarlane, W.T., Tank, R.W., and Whitsett, R.M., 1974, Telluric current exploration for geothermal anomalies in Oregon: Oregon Department of Geology and Mineral Industries, Ore Bin, v. 36, no. 6, p. 93-107.
- Bogue, R.G., and Hodge, E.T., 1940, Cascade andesites of Oregon: American Mineralogist, v. 25, no. 10, p. 627-665.
- Bowen, R.G., 1972, Geothermal gradient studies in Oregon: Oregon Department of Geology and Mineral Industries, Ore Bin, v. 34, no. 4, p. 68-71.
- 1975, Geothermal gradient data: Oregon Department of Geology and Mineral Industries Open-File Report 0-75-3, 133 p.

- Bowen, R.G., and Blackwell, D.D., 1973, Progress report on geothermal measurements in Oregon: Oregon Department of Geology and Mineral Industries, Ore Bin, v. 35, no. 1, p. 6-7.
- Bowen, R.G., Blackwell, D.D., and Hull, D.A., 1975, Geothermal studies and exploration in Oregon (draft final report to U.S. Bureau of Mines): Oregon Department of Geology and Mineral Industries Open-File Report O-75-7, 65 p.
- 1977, Geothermal exploration studies in Oregon: Oregon Department of Geology and Mineral Industries Miscellaneous Paper 19, 50 p.
- Bowen, R.G., and Peterson, N.V., compilers, 1970, Thermal springs and wells in Oregon: Oregon Department of Geology and Mineral Industries Miscellaneous Paper 14 (map), scale 1:1,000,000 (approx.).
- Bowen, R.G., Peterson, N.V., and Riccio, J.F., compilers, 1978, Low- to intermediate-temperature thermal springs and wells in Oregon: Oregon Department of Geology and Mineral Industries Geological Map Series GMS-10, scale 1:1,000,000.
- Brown, D.E., McLean, G.D., Gest, D.E., Woller, N.M., and Black, J.L., 1980, Reconnaissance geology of the Oakridge-Willamette Pass area, central Cascades, Oregon (abs.): Oregon Department of Geology and Mineral Industries, Oregon Geology, v. 42, no. 4, p. 69.
- Buddington, A.F., and Callaghan, E., 1936, Dioritic intrusive rocks and contact metamorphism in the Cascade Range in Oregon: American Journal of Science, 5th ser., v. 31, no. 186, p. 421-449.
- Callaghan, E., 1933, Some features of the volcanic sequence in the Cascade Range in Oregon: American Geophysical Union Transactions, 14 Annual Meeting, p. 243-249.
- 1934, Some aspects of the geology of the Cascade Range in Oregon (abs.): Washington Academy of Science Journal, v. 24, no. 4, p. 190-191.
- Callaghan, E., and Buddington, A.F., 1938, Metalliferous mineral deposits of the Cascade Range in Oregon: U.S. Geological Survey Bulletin 893, 141 p.
- Connard, G.G., 1980, Analysis of aeromagnetic measurements from the central Oregon Cascades: Corvallis, Oreg., Oregon State University master's thesis, 101 p.
- Connard, G.G., Couch, R.W., and Gemperle, M., 1979, Regional tectonic and thermal model of the central Cascades, Oregon, from magnetic data (abs.): EOS (American Geophysical Union Transactions), v. 60, no. 46, p. 959.
- Connard, G.G., Gemperle, M., and Couch, R.W., 1978, A new aeromagnetic anomaly map of the central Cascades region of Oregon (abs.): EOS (American Geophysical Union Transactions), 25th Pacific Northwest Region Meeting, Tacoma, Wash. (unpublished).
- Couch, R.W., 1978, Geophysical investigations of the Cascade Range in central Oregon: U.S. Geological Survey Extramural Geothermal Research Program Technical Report 4 (unpublished), 133 p.

- Couch, R.W., and Baker, B., 1977, Geophysical investigations of the Cascade Range in central Oregon: U.S. Geological Survey Extramural Geothermal Research Program Technical Report 2 (unpublished), 55 p.
- Couch, R.W., Gemperle, M., and Connard, G.G., 1978, Total field aeromagnetic anomaly map, Cascade Mountain Range, central Oregon: Oregon Department of Geology and Mineral Industries Geological Map Series GMS-9, scale 1:125,000.
- Dickinson, W.R., 1979, Cenozoic plate tectonic setting of the Cordilleran region in the United States, in Armentrout, J.M., Cole, M.R., and Terbest, H., Jr., eds., Cenozoic paleogeography of the western United States: Pacific Coast Paleogeography Symposium 3, Anaheim, Calif., March 15-16, 1979, p. 219-237.
- Dole, H.M., ed., 1968, Andesite Conference guidebook: Oregon Department of Geology and Mineral Industries Bulletin 62, 107 p.
- Godwin, L.H., Haigler, L.B., Rioux, R.L., White, D.E., Muffler, L.J.P., and Wayland, R.G., 1971, Classification of public lands valuable for geothermal steam and associated geothermal resources: U.S. Geological Survey Circular 647, 18 p.
- Groh, E.A., 1966, Geothermal energy potential in Oregon: Oregon Department of Geology and Mineral Industries, Ore Bin, v. 28, no. 7, p. 125-135.
- Hammond, P.E., 1974, Brief outline to volcanic stratigraphy and guide to geology of southern Cascade Range, Washington, and northern Cascade Range, Oregon: Oregon Department of Geology and Mineral Industries unpublished report, 51 p.
- 1976, Geothermal model for the Cascade Range: Oregon Department of Geology and Mineral Industries unpublished report, 20 p.
- 1979, A tectonic model for evolution of the Cascade Range, in Armentrout, J.M., Cole, M.R., and Terbest, H., Jr., eds., Cenozoic paleogeography of the western United States: Pacific Coast Paleogeography Symposium 3, Anaheim, Calif., March 15-16, 1979, p. 219-237.
- Hodge, E.T., 1928, Framework of Cascade Mountains in Oregon: Pan-American Geologist, v. 49, no. 5, p. 341-356.
- Hull, D.A., Blackwell, D.D., and Black, G.L., 1978, Geothermal gradient data: Oregon Department of Geology and Mineral Industries Open-File Report 0-78-4, 187 p.
- Hull, D.A., Bowen, R.G., Blackwell, D.D., and Peterson, N.V., 1977, Preliminary heat-flow map and evaluation of Oregon's geothermal energy potential: Oregon Department of Geology and Mineral Industries, Ore Bin, v. 39, no. 7, p. 109-123.
- Kittleman, L.R., 1973, Mineralogy, correlation, and grain-size distributions of Mazama tephra and other postglacial pyroclastic layers, Pacific Northwest: Geological Society of America Bulletin, v. 84, no. 9, p. 2957-2980.

- Lawrence, R.D., 1976, Strike-slip faulting terminates the Basin and Range province in Oregon: Geological Society of America Bulletin, v. 87, no. 6, p. 846-850.
- Mackin, J.H., and Cary, A.S., 1965, Origin of Cascade landscapes: Washington Division of Mines and Geology Information Circular 41, 35 p.
- Mariner, R.H., Presser, T.S., Rapp, J.B., and Willey, L.M., 1975, The minor and trace elements, gas, and isotope compositions of the principal hot springs of Nevada and Oregon: U.S. Geological Survey open-file report, 27 p.
- Mariner, R.H., Rapp, J.B., Willey, L.M., and Presser, T.S., 1974, The chemical composition and estimated minimum thermal reservoir temperatures of selected hot springs in Oregon: Menlo Park, Calif., U.S. Geological Survey open-file report, 27 p.
- Mariner, R.H., Swanson, J.R., Orris, G.J., Presser, T.S., and Evans, W.C., 1980, Chemical and isotopic data for water from thermal springs and wells of Oregon: U.S. Geological Survey Open-File Report 80-737, 50 p.
- McBirney, A.R., 1968, Petrochemistry of the Cascade andesite volcanoes, in Dole, H.M., ed., Andesite Conference guidebook: Oregon Department of Geology and Mineral Industries Bulletin 62, p. 101-107.
- \_\_\_\_\_, 1975, Consequences of recent stratigraphic studies in the Oregon Cascade Range (abs.): Proceedings of the Oregon Academy of Science, v. 11, p. 83.
- \_\_\_\_\_, 1976, Some geologic constraints on models for magma generation in orogenic environments: Canadian Mineralogist, v. 14, no. 3, p. 245-254.
- McBirney, A.R., Sutter, J.F., Naslund, H.R., Sutton, K.G., and White, C.M., 1974, Episodic volcanism in the central Oregon Cascade Range: Geology, v. 2, no. 12, p. 585-589.
- McBirney, A.R., and White, C.M., 1977, Some quantitative aspects of orogenic volcanism in the Oregon Cascades (abs.): Geological Society of America Abstracts with Programs, v. 9, no. 7, p. 1087.
- \_\_\_\_\_, 1978, Recent progress in studies of the Oregon Cascades (abs.): Proceedings of the Oregon Academy of Science, v. 14, p. 157-158.
- Muffler, L.J.P., ed., 1979, Assessment of geothermal resources of the United States--1978: U.S. Geological Survey Circular 790, 163 p.
- Peck, D.L., Griggs, A.B., Schlicker, H.G., Wells, F.G., and Dole, H.M., 1964, Geology of the central and northern parts of the Western Cascade Range in Oregon: U.S. Geological Survey Professional Paper 449, 56 p.
- Peterson, N.V., and Groh, E.A., eds., 1965, Lunar Geological Field Conference guidebook: Oregon Department of Geology and Mineral Industries Bulletin 57, 51 p.

Peterson, N.V., and Youngquist, W., 1975, Central Western and High Cascades geological reconnaissance and heat-flow hole location recommendations: Oregon Department of Geology and Mineral Industries Open-File Report 0-75-2, 41 p.

Pitts, G.S., 1979, Interpretation of gravity measurements made in the Cascade Mountains and the adjoining Basin and Range province in central Oregon: Corvallis, Oreg., Oregon State University master's thesis, 186 p.

Pitts, G.S., Connard, G.G., Gemperle, M., and Couch, R.W., 1978, Gravity and aeromagnetic measurements in the central Cascades of Oregon (abs.): EOS (American Geophysical Union Transactions), v. 59, no. 12, p. 1188-1189.

Pitts, G.S., and Couch, R.W., 1978, Complete Bouguer gravity anomaly map, Cascade Mountain Range, central Oregon: Oregon Department of Geology and Mineral Industries Geological Map Series GMS-8, scale 1:125,000.

Riccio, J.F., compiler, 1979, Preliminary geothermal resource map of Oregon: Oregon Department of Geology and Mineral Industries Geological Map Series GMS-11, scale 1:500,000.

— 1980, Geothermal exploration in Oregon, 1979: Oregon Department of Geology and Mineral Industries, Oregon Geology, v. 42, no. 4, p. 59-69.

Riccio, J.F., and Newton, V.C., Jr., 1979, Geothermal exploration in Oregon in 1978: Oregon Department of Geology and Mineral Industries, Oregon Geology, v. 41, no. 3, p. 39-46.

Sass, J.H., Lachenbruch, A.H., Munroe, R.J., Green, G.W., and Moses, T.H., Jr., 1971, Heat flow in the western United States: Journal of Geophysical Research, v. 76, no. 26, p. 6376-6413.

Schlicker, H.G., and Dole, H.M., 1957, Reconnaissance geology of the Marcola, Leaburg, and Lowell quadrangles, Oregon: Oregon Department of Geology and Mineral Industries, Ore Bin, v. 19, no. 7, p. 57-62.

Shannon and Wilson, Inc., 1970, Private report to Stone and Webster Engineering Corp. on preliminary subsurface investigation of proposed nuclear power plant sites for Eugene Water and Electric Board, Eugene, Oregon.

Sutter, J.F., 1978, K/Ar ages of Cenozoic volcanic rocks from the Oregon Cascades west of 121° 30': Isochron/West, no. 21, p. 15-31.

Taylor, H.P., 1971, Oxygen isotope evidence for large-scale interaction between meteoric groundwaters and Tertiary granodiorite intrusions, Western Cascade Range, Oregon: Journal of Geophysical Research, v. 76, p. 7855-7874.

Thayer, T.P., 1937, Petrology of later Tertiary and Quaternary rocks of the north-central Cascade Mountains in Oregon, with notes on similar rocks in western Nevada: Geological Society of America Bulletin, v. 48, no. 11, p. 1611-1651.

Thiruvathukal, J.V., 1968, Regional gravity of Oregon: Corvallis, Oreg., Oregon State University doctoral dissertation, 92 p.

U.S. Geological Survey and Oregon Department of Geology and Mineral Industries, 1979, Chemical analyses of thermal springs and wells in Oregon: Oregon Department of Geology and Mineral Industries Open-File Report 0-79-3, 170 p.

Wells, F.G., and Peck, D.L., 1961, Geologic map of Oregon west of the 121st meridian: U.S. Geological Survey Miscellaneous Geologic Investigations Map I-325, scale 1:500,000.

Wheeler, H.E., and Mallory, V.S., 1970, Oregon Cascades in relation to Cenozoic stratigraphy, in Columbia River Basalt Symposium, 2nd, Cheney, Wash., 1969, Proceedings: Cheney, Wash., Eastern Washington State College Press, p. 97-124.

Wilkinson, W.D., and Schlicker, H.G., 1959, Field trip 3 (Corvallis to Prineville), in Field guidebook, College Teachers Conference in Geology, Corvallis, Oreg., 1959: Oregon Department of Geology and Mineral Industries Bulletin 50, p. 43-72.

Williams, H., 1953, The ancient volcanoes of Oregon (2nd ed.): Eugene, Oreg., Oregon State System of Higher Education, Condon Lectures, 68 p.

## APPENDIX A

### Formulas used in calculations

Na:K (revised):  $t^{\circ}\text{C} = \frac{1217}{\log(\text{Na}/\text{K}) + 1.483} - 273.15$  (Fournier, 1979)

Na:K:Ca:  $t^{\circ}\text{C} = \frac{1647}{2.24 + F(T)} - 273.15$  (Fournier and Truesdell, 1973),

where  $F(T) = \log(\text{Na}/\text{K}) + [\beta \log(\sqrt{\text{Ca}}/\text{Na})]$ ,  
 $\beta = 1/3$  if  $t > 100^{\circ}\text{C}$ , and  $4/3$  if  $t < 100^{\circ}\text{C}$ ,  
 $t^{\circ}\text{C}$  = calculated reservoir temperature,  
and concentrations are expressed in molality.

Magnesium correction ratio:

$$R = \frac{(\text{milliequivalents Mg})}{(\text{milliequivalents Mg}) + (\text{milliequivalents Ca}) + (\text{milliequivalents K})} \times 100$$

If  $R < 5$  or  $> 50$ , no calculation was made. For  $R$  between 5-50,

$$\Delta t_{\text{Mg}} = 10.66 - (4.7415)(R) + [(325.87)(\log R)^2] - [(1.032 \times 10^5)(\log R)^2/T] - [(1.968 \times 10^7)(\log R)^2/T^2] + [(1.605 \times 10^7)(\log R)^3/T^2],$$

where  $R$  = magnesium correction ratio expressed in equivalents,

$\Delta t_{\text{Mg}}$  = the temperature correction that is subtracted from  
the Na:K:Ca 1/3  $\beta$  calculated temperature,

$T$  = Na:K:Ca 1/3  $\beta$  calculated temperature in  $^{\circ}\text{K}$ .

Or  $\Delta t_{\text{Mg}}$  can be obtained by using the graph compiled by Fournier and Potter (1979).

$\text{SiO}_2$  temperature calculations (Fournier and Rowe, 1966):

$\text{SiO}_2$  (conductive),  $t^{\circ}\text{C} = \frac{1309}{5.19 + \log(\text{SiO}_2)} - 273.15$

$\text{SiO}_2$  (adiabatic),  $t^{\circ}\text{C} = \frac{1522}{5.75 + \log(\text{SiO}_2)} - 273.15$

$\text{SiO}_2$  (chalcedony),  $t^{\circ}\text{C} = \frac{1032}{4.69 + \log(\text{SiO}_2)} - 273.15$

$\text{SiO}_2$  (opal),  $t^{\circ}\text{C} = \frac{731}{4.52 + \log(\text{SiO}_2)} - 273.15$ ,

where  $\text{SiO}_2$  is expressed in mg/l.

References cited:

- Fournier, R.O., 1979, A revised equation for the Na/K geothermometer, in Geothermal Resources Council Transactions 3, 1979, p. 221-224.
- Fournier, R.O., and Potter, R.W., II, 1979, Magnesium correction to the Na:K:Ca chemical geothermometer: *Geochimica et Cosmochimica Acta*, v. 43, p. 1543-1550.
- Fournier, R.O., and Rowe, J.J., 1966, Estimation of underground temperatures from the silica content of water from hot springs and wet-steam wells: *American Journal of Science*, v. 264, p. 685-697.
- Fournier, R.O., and Truesdell, A.H., 1973, An empirical Na:K:Ca geothermometer for natural waters: *Geochimica et Cosmochimica Acta*, v. 37, p. 1255-1275.
- Mariner, R.H., Swanson, J.R., Orris, G.J., Presser, T.S., and Evans, W.C., 1980, Chemical and isotopic data for water from thermal springs and wells of Oregon: U.S. Geological Survey Open-File Report 80-737, 50 p.

APPENDIX B

Geothermal gradient data

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 15.0            | 49.2          | 8.860       | 47.95 | 0.0                 | 0.0          |
| 17.0            | 55.2          | 8.920       | 48.06 | 0.0                 | 0.0          |
| 19.0            | 62.2          | 8.950       | 48.11 | 0.0                 | 0.0          |
| 21.0            | 68.2          | 9.030       | 48.25 | 0.0                 | 0.0          |
| 23.0            | 74.2          | 9.100       | 48.38 | 0.0                 | 0.0          |
| 25.0            | 80.2          | 9.160       | 48.49 | 0.0                 | 0.0          |
| 27.0            | 86.2          | 9.300       | 48.74 | 0.0                 | 0.0          |
| 29.0            | 92.2          | 9.520       | 49.14 | 0.0                 | 0.0          |
| 31.0            | 98.2          | 9.670       | 49.41 | 0.0                 | 0.0          |
| 33.0            | 104.2         | 9.930       | 50.77 | 0.0                 | 0.0          |
| 35.0            | 110.2         | 9.940       | 50.84 | 0.0                 | 0.0          |
| 37.0            | 116.2         | 9.920       | 50.84 | 0.0                 | 0.0          |
| 41.0            | 127.2         | 10.050      | 51.09 | 0.0                 | 0.0          |
| 43.0            | 134.2         | 10.080      | 51.26 | 0.0                 | 0.0          |
| 45.0            | 141.2         | 10.120      | 51.43 | 0.0                 | 0.0          |
| 47.0            | 147.2         | 10.180      | 51.60 | 0.0                 | 0.0          |
| 49.0            | 154.2         | 10.400      | 51.76 | 0.0                 | 0.0          |
| 51.0            | 160.2         | 10.700      | 51.93 | 0.0                 | 0.0          |
| 53.0            | 167.2         | 10.930      | 52.10 | 0.0                 | 0.0          |
| 55.0            | 173.2         | 10.980      | 52.27 | 0.0                 | 0.0          |
| 57.0            | 180.2         | 11.030      | 52.43 | 0.0                 | 0.0          |
| 59.0            | 187.2         | 11.050      | 52.60 | 0.0                 | 0.0          |
| 61.0            | 193.2         | 11.070      | 52.76 | 0.0                 | 0.0          |
| 63.0            | 200.2         | 11.150      | 52.93 | 0.0                 | 0.0          |
| 65.0            | 206.2         | 11.390      | 53.10 | 0.0                 | 0.0          |
| 67.0            | 213.2         | 11.560      | 53.26 | 0.0                 | 0.0          |
| 69.0            | 220.2         | 11.710      | 53.43 | 0.0                 | 0.0          |
| 71.0            | 226.2         | 11.840      | 53.60 | 0.0                 | 0.0          |
| 73.0            | 232.2         | 11.960      | 53.76 | 0.0                 | 0.0          |
| 75.0            | 239.2         | 12.070      | 53.93 | 0.0                 | 0.0          |
| 77.0            | 246.2         | 12.210      | 54.10 | 0.0                 | 0.0          |
| 79.0            | 252.2         | 12.330      | 54.26 | 0.0                 | 0.0          |
| 81.0            | 259.2         | 12.450      | 54.41 | 0.0                 | 0.0          |
| 83.0            | 265.2         | 12.580      | 54.56 | 0.0                 | 0.0          |
| 85.0            | 272.2         | 12.700      | 54.71 | 0.0                 | 0.0          |
| 87.0            | 278.2         | 12.830      | 54.86 | 0.0                 | 0.0          |
| 89.0            | 285.2         | 12.930      | 54.99 | 0.0                 | 0.0          |
| 91.0            | 291.2         | 13.060      | 55.15 | 0.0                 | 0.0          |


LOCATION: ROSEBURG AMS, OREGON  
 19S/ 4E-29CCB  
 HOLE NAME: CHRIS CRK  
 DATE MEASURED: 9/17/80

PAGE 2

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | DEG F | GEO THERMAL GRADIENT<br>DEG C/KM | DEG F/100 FT |
|-----------------|---------------|----------------------|-------|----------------------------------|--------------|
| 97.0            | 318.2         | 13.190               | 55.74 | 65.0                             | 3.6          |
| 99.0            | 324.7         | 13.320               | 56.90 | 65.0                             | 3.7          |
| 101.0           | 331.3         | 13.440               | 56.19 | 65.0                             | 3.7          |
| 103.0           | 337.8         | 13.580               | 56.44 | 65.0                             | 3.7          |
| 105.0           | 344.4         | 13.690               | 56.64 | 65.0                             | 3.7          |
| 107.0           | 351.0         | 13.820               | 56.88 | 65.0                             | 3.7          |
| 109.0           | 357.5         | 13.980               | 57.16 | 65.0                             | 3.7          |
| 111.0           | 364.1         | 14.110               | 57.40 | 65.0                             | 3.7          |
| 113.0           | 370.6         | 14.250               | 57.65 | 65.0                             | 3.7          |
| 115.0           | 377.2         | 14.390               | 57.90 | 65.0                             | 3.7          |
| 117.0           | 383.7         | 14.520               | 58.14 | 65.0                             | 3.7          |
| 119.0           | 390.3         | 14.650               | 58.37 | 65.0                             | 3.7          |
| 121.0           | 396.9         | 14.780               | 58.60 | 65.0                             | 3.7          |
| 123.0           | 403.4         | 14.930               | 58.87 | 65.0                             | 3.7          |
| 125.0           | 410.0         | 15.040               | 59.07 | 65.0                             | 3.7          |
| 127.0           | 416.6         | 15.180               | 59.32 | 65.0                             | 3.7          |
| 129.0           | 423.1         | 15.310               | 59.55 | 65.0                             | 3.7          |
| 131.0           | 429.7         | 15.430               | 59.77 | 65.0                             | 3.7          |
| 133.0           | 436.3         | 15.570               | 60.03 | 65.0                             | 3.7          |
| 135.0           | 442.9         | 15.730               | 60.31 | 65.0                             | 3.7          |
| 137.0           | 449.4         | 15.860               | 60.55 | 65.0                             | 3.7          |
| 139.0           | 455.9         | 15.980               | 60.76 | 65.0                             | 3.7          |
| 141.0           | 462.5         | 16.100               | 60.98 | 65.0                             | 3.7          |
| 143.0           | 469.1         | 16.210               | 61.18 | 65.0                             | 3.7          |
| 145.0           | 475.7         | 16.320               | 61.38 | 65.0                             | 3.7          |
| 147.0           | 482.2         | 16.430               | 61.57 | 65.0                             | 3.7          |
| 149.0           | 488.7         | 16.540               | 61.77 | 65.0                             | 3.7          |
| 151.0           | 495.3         | 16.660               | 61.99 | 65.0                             | 3.7          |
| 153.0           | 501.8         | 16.760               | 62.17 | 50.0                             | 2.7          |

TEMPERATURE, DEG C

DEPTH, METERS

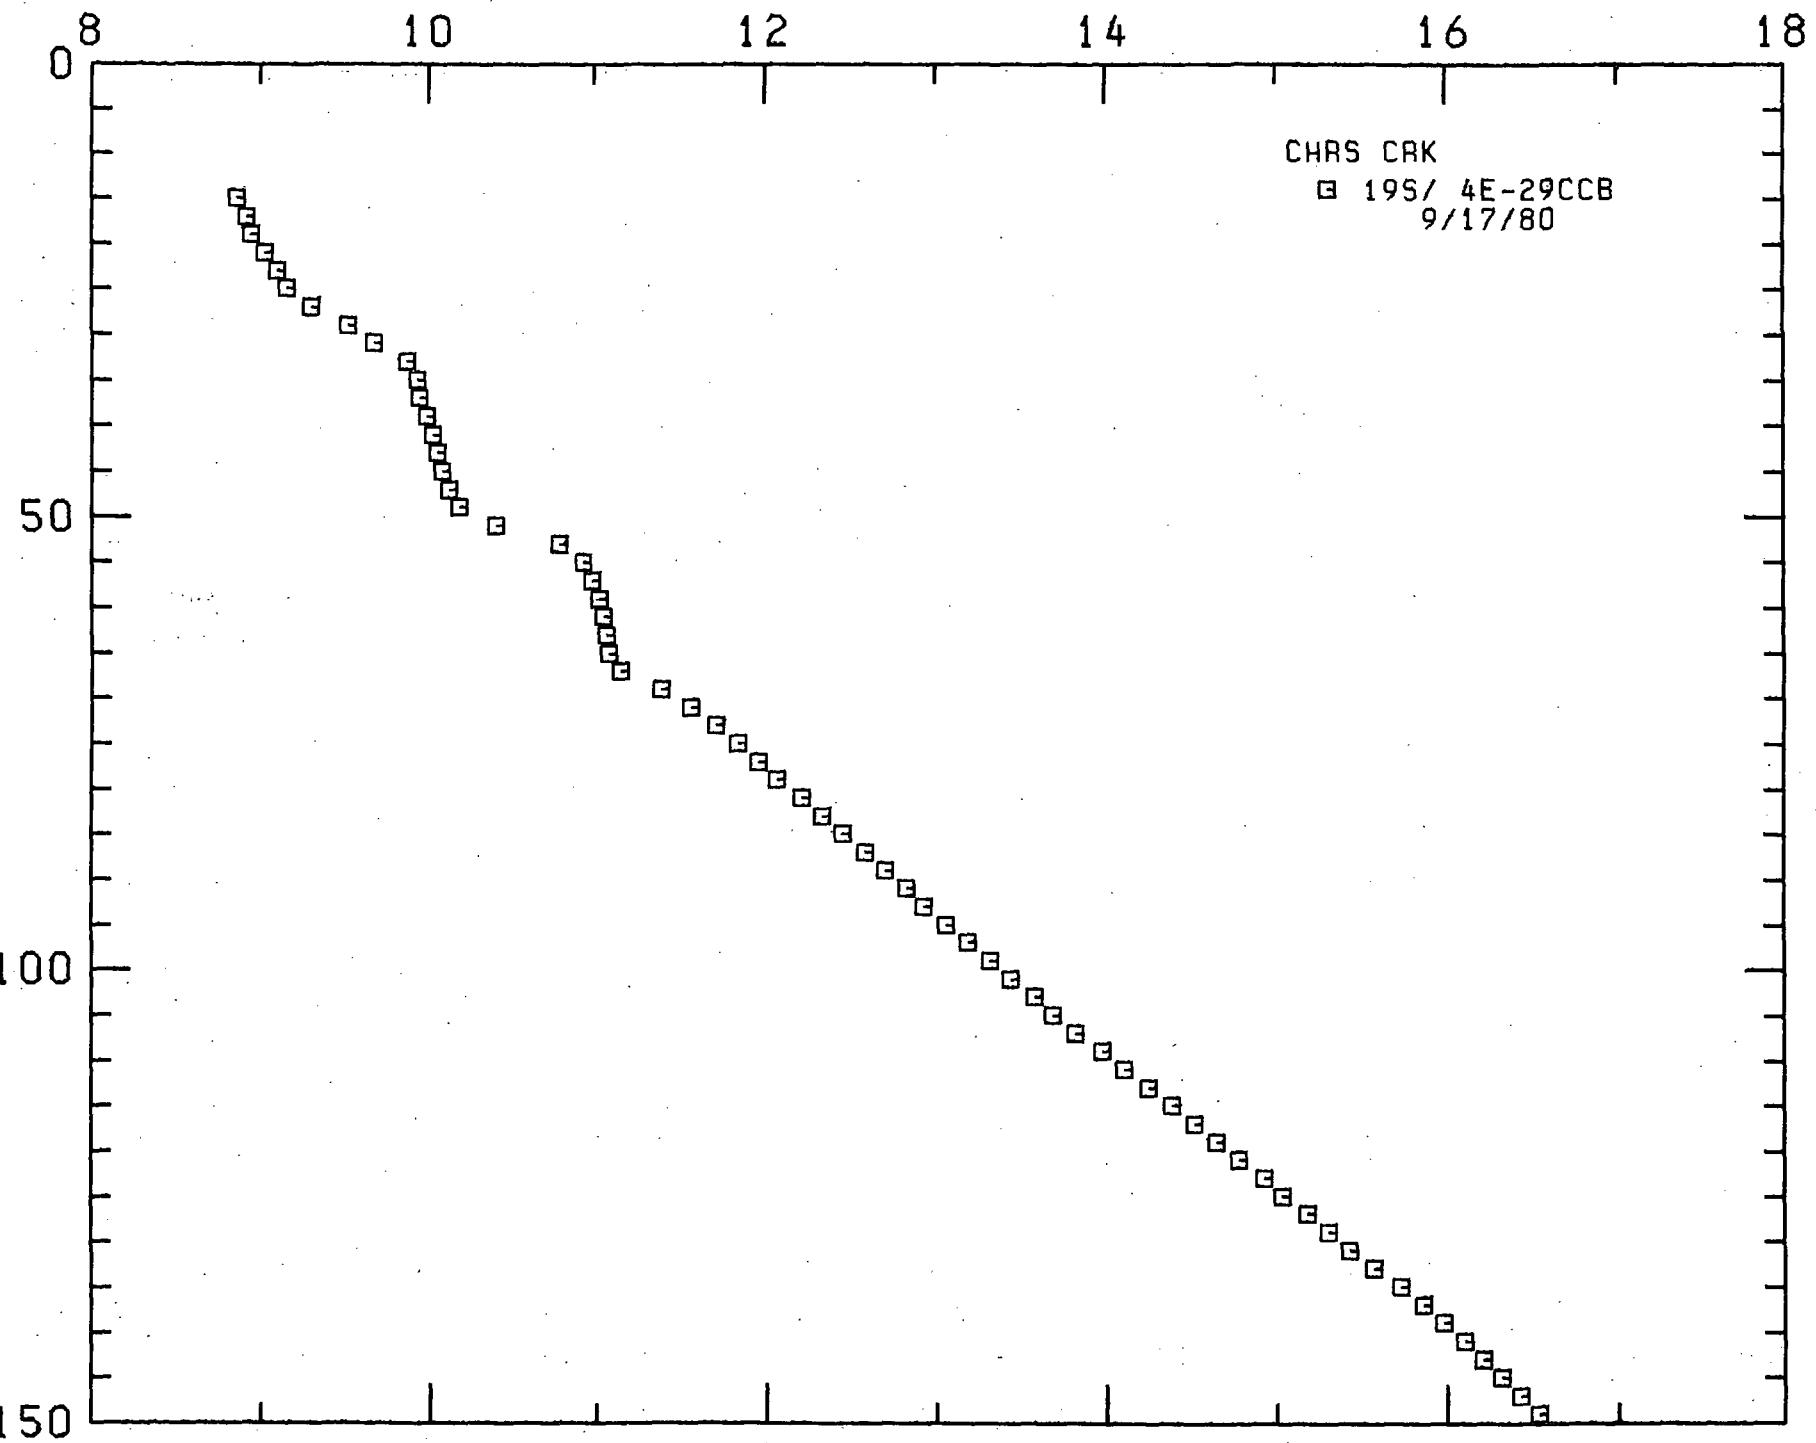

LOCATION: ROSEBURG AMS, OREGON

19S/ SE-27BC

HOLE NAME: BRCK CRK

DATE MEASURED: 9/17/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | DEG F | GEOTHERMAL GRADIENT<br>DEG C/KM | DEG F/100 FT |
|-----------------|---------------|----------------------|-------|---------------------------------|--------------|
| 30.0            | 98.4          | 11.110               | 52.00 | 0.0                             | 0.0          |
| 32.0            | 105.0         | 9.600                | 49.28 | -755.00                         | -41.4        |
| 34.0            | 111.5         | 9.650                | 49.37 | 25.00                           | 1.4          |
| 36.0            | 118.1         | 9.680                | 49.42 | 15.00                           | 0.8          |
| 38.0            | 124.6         | 9.700                | 49.46 | 10.00                           | 0.5          |
| 40.0            | 131.2         | 9.710                | 49.48 | 5.00                            | 0.25         |
| 42.0            | 137.0         | 9.710                | 49.48 | 0.00                            | 0.0          |
| 44.0            | 144.0         | 9.740                | 49.53 | 15.00                           | 0.8          |
| 46.0            | 150.9         | 9.820                | 49.68 | 40.00                           | 2.2          |
| 48.0            | 157.4         | 9.850                | 49.73 | 15.00                           | 0.8          |
| 50.0            | 164.0         | 9.950                | 49.91 | 50.00                           | 2.7          |
| 52.0            | 170.6         | 9.980                | 49.96 | 15.00                           | 0.8          |
| 54.0            | 177.1         | 10.020               | 50.04 | 20.00                           | 1.1          |
| 56.0            | 183.7         | 10.040               | 50.07 | 10.00                           | 0.5          |
| 58.0            | 190.3         | 10.060               | 50.11 | 10.00                           | 0.5          |
| 60.0            | 196.9         | 10.130               | 50.23 | 35.00                           | 1.9          |
| 62.0            | 203.4         | 10.230               | 50.41 | 50.00                           | 2.8          |
| 64.0            | 209.9         | 10.310               | 50.56 | 40.00                           | 2.2          |
| 66.0            | 216.4         | 10.310               | 50.56 | 0.00                            | 0.0          |
| 68.0            | 223.0         | 10.430               | 50.77 | 60.00                           | 3.3          |
| 70.0            | 229.6         | 10.450               | 50.81 | 10.00                           | 0.5          |
| 72.0            | 236.1         | 10.530               | 50.95 | 40.00                           | 2.2          |
| 74.0            | 242.7         | 10.640               | 51.15 | 55.00                           | 3.1          |
| 76.0            | 249.3         | 10.800               | 51.44 | 80.00                           | 4.4          |
| 78.0            | 255.9         | 11.290               | 52.32 | 245.00                          | 13.0         |
| 80.0            | 262.4         | 11.580               | 52.84 | 145.00                          | 8.0          |
| 82.0            | 269.0         | 11.610               | 52.90 | 15.00                           | 0.8          |
| 84.0            | 275.5         | 11.630               | 52.93 | 10.00                           | 0.5          |
| 86.0            | 282.1         | 11.640               | 52.95 | 5.00                            | 0.25         |
| 88.0            | 288.6         | 11.640               | 52.95 | 0.00                            | 0.0          |
| 90.0            | 295.2         | 11.700               | 53.06 | 30.00                           | 1.6          |
| 92.0            | 301.8         | 11.720               | 53.10 | 10.00                           | 0.5          |
| 94.0            | 308.3         | 11.740               | 53.13 | 10.00                           | 0.5          |
| 96.0            | 314.9         | 11.760               | 53.17 | 10.00                           | 0.5          |
| 98.0            | 321.4         | 11.790               | 53.22 | 15.00                           | 0.8          |
| 100.0           | 328.0         | 11.860               | 53.35 | 35.00                           | 1.8          |
| 102.0           | 334.6         | 11.910               | 53.44 | 25.00                           | 1.4          |
| 104.0           | 341.1         | 11.970               | 53.55 | 30.00                           | 1.6          |
| 106.0           | 347.7         | 11.990               | 53.58 | 10.00                           | 0.5          |
| 108.0           | 354.2         | 11.970               | 53.55 | -10.00                          | -0.5         |
| 110.0           | 360.8         | 12.010               | 53.62 | 20.00                           | 1.1          |


LOCATION: ROSEBURG AMS, OREGON  
 19S/ SE-27BCC  
 HOLE NAME: BRCK CRK  
 DATE MEASURED: 9/17/80

PAGE 2

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 112.0           | 367.4         | 12.070      | 53.73 | 30.0                | 1.6          |
| 114.0           | 373.0         | 12.100      | 53.78 | 15.0                | 0.8          |
| 116.0           | 380.0         | 12.120      | 53.82 | 10.0                | 0.5          |
| 118.0           | 387.0         | 12.400      | 54.32 | 140.0               | 1.1          |
| 120.0           | 393.0         | 12.870      | 55.17 | 235.0               | 1.7          |
| 122.0           | 400.0         | 13.310      | 55.96 | 220.0               | 1.4          |
| 124.0           | 406.0         | 13.640      | 56.55 | 165.0               | 1.0          |
| 126.0           | 413.0         | 13.920      | 57.06 | 140.0               | 0.9          |
| 128.0           | 419.0         | 14.210      | 57.59 | 145.0               | 0.8          |
| 130.0           | 426.0         | 14.430      | 57.92 | 110.0               | 0.7          |
| 132.0           | 433.0         | 14.620      | 58.32 | 95.0                | 0.6          |
| 134.0           | 439.0         | 14.800      | 58.64 | 90.0                | 0.5          |
| 136.0           | 446.0         | 14.940      | 58.88 | 70.0                | 0.4          |
| 138.0           | 452.0         | 15.070      | 59.13 | 65.0                | 0.4          |
| 140.0           | 459.0         | 15.200      | 59.36 | 65.0                | 0.4          |
| 142.0           | 465.0         | 15.360      | 59.65 | 80.0                | 0.5          |
| 144.0           | 472.0         | 15.460      | 59.83 | 50.0                | 0.3          |
| 146.0           | 478.0         | 15.550      | 59.99 | 45.0                | 0.3          |
| 148.0           | 485.4         | 15.740      | 60.33 | 95.0                | 0.5          |
| 150.0           | 492.0         | 15.940      | 60.69 | 100.0               | 0.6          |
| 152.0           | 498.6         | 16.060      | 60.91 | 60.0                | 0.3          |

TEMPERATURE, DEG C

04

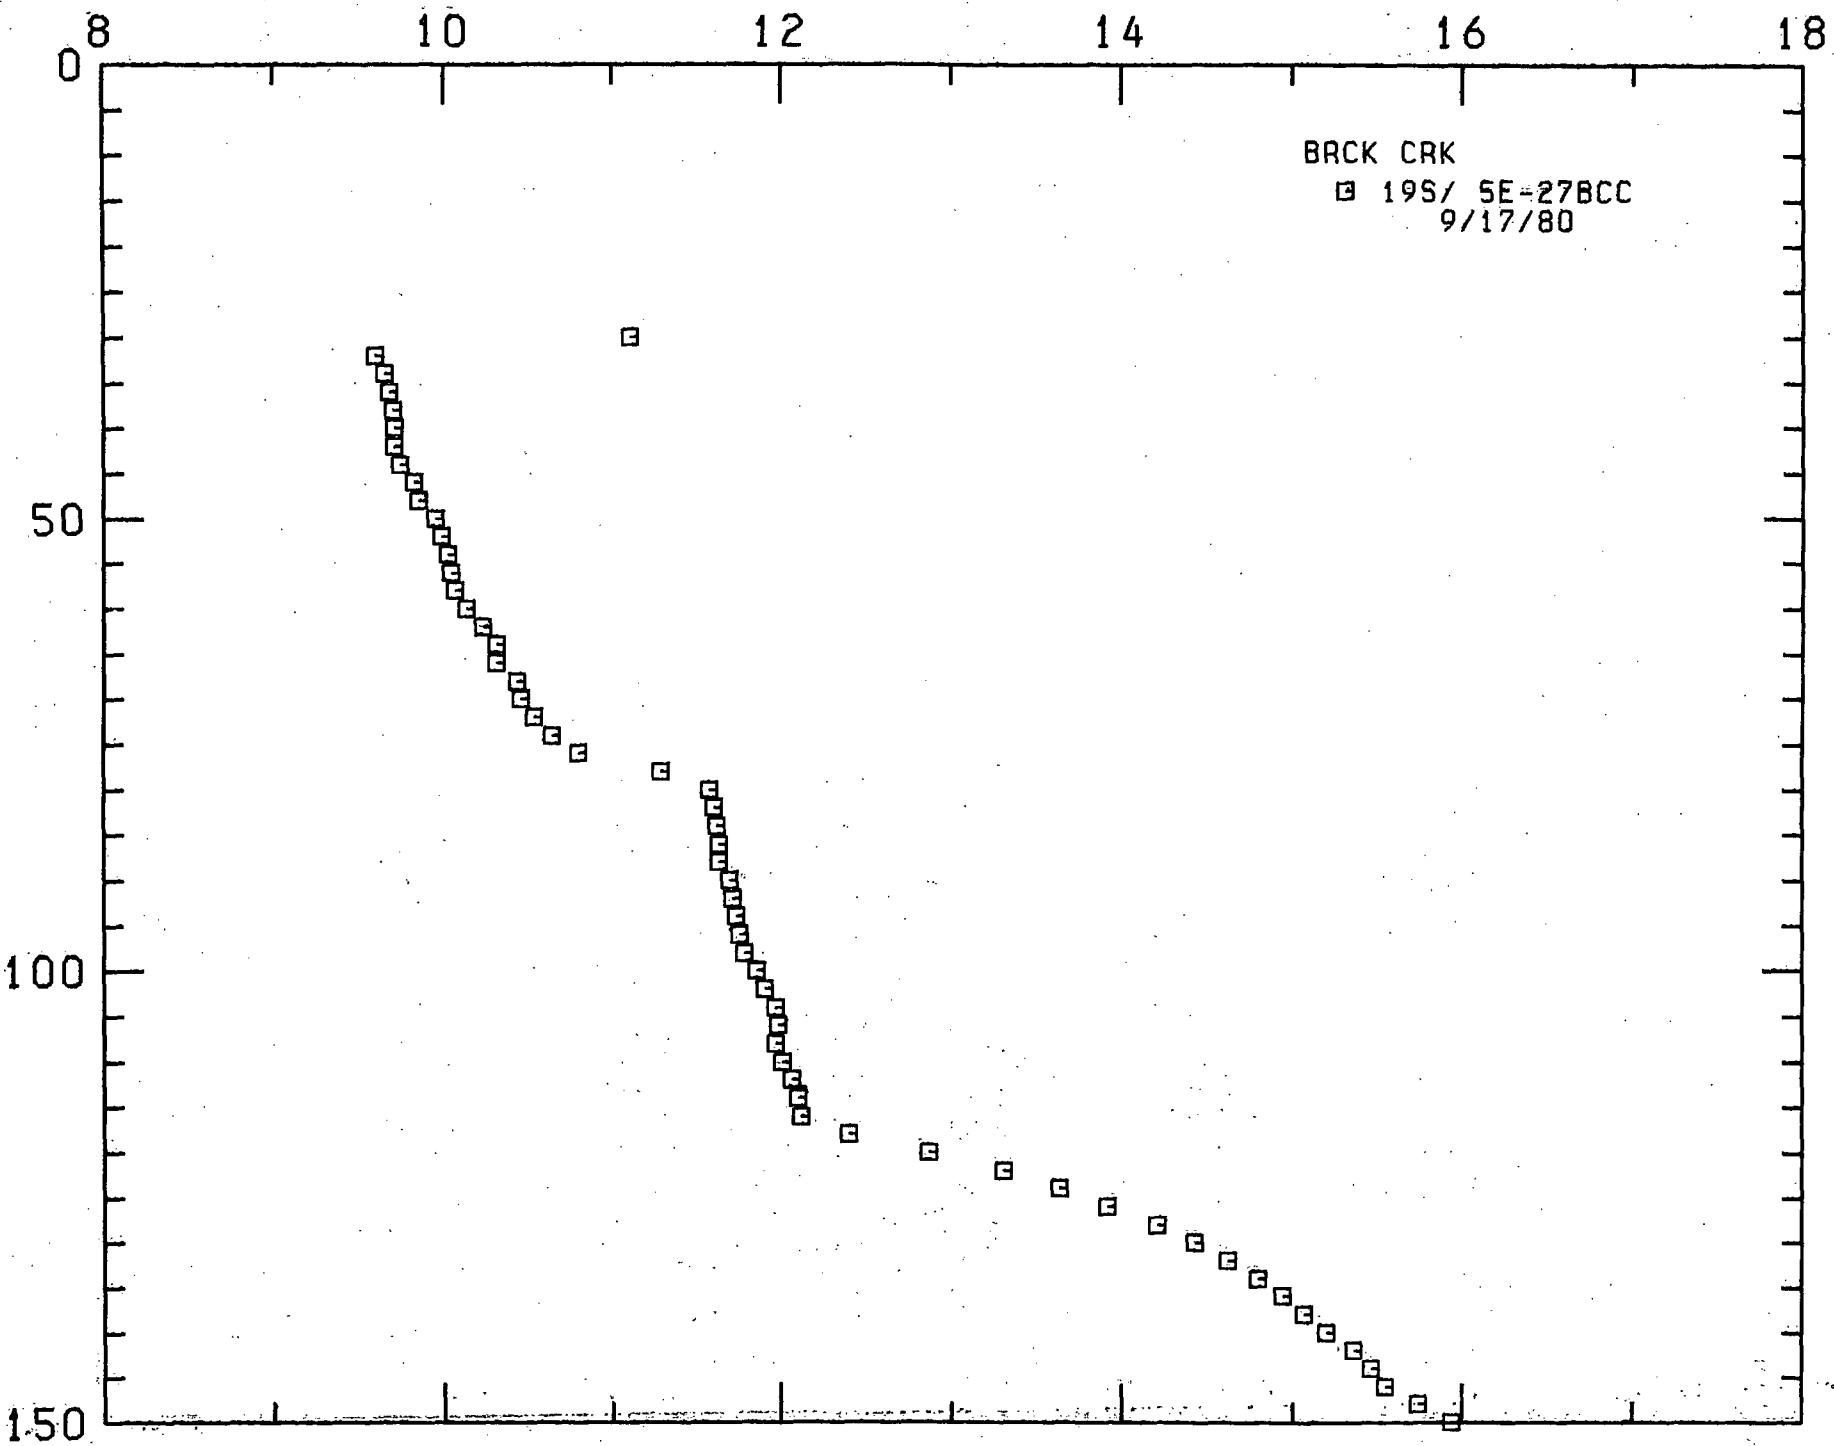

LOCATION: ROSEBURG AMS, OREGON  
 19S/ 6E-25DDC  
 HOLE NAME: N FORK  
 DATE MEASURED: 9/17/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | TEMPERATURE<br>DEG F | GEOTHERMAL GRADIENT<br>DEG C/KM | GEOTHERMAL GRADIENT<br>DEG F/100 FT |
|-----------------|---------------|----------------------|----------------------|---------------------------------|-------------------------------------|
| 36.0            | 118.1         | 10.300               | 50.54                | 0.0                             | 0.0                                 |
| 38.0            | 124.6         | 10.040               | 50.07                | -130.0                          | -7.1                                |
| 40.0            | 131.2         | 10.210               | 50.38                | 85.0                            | 4.7                                 |
| 42.0            | 137.8         | 10.270               | 50.49                | 30.0                            | 1.6                                 |
| 44.0            | 144.3         | 10.380               | 50.68                | 55.0                            | 3.0                                 |
| 46.0            | 150.9         | 10.520               | 50.94                | 70.0                            | 3.8                                 |
| 48.0            | 157.4         | 10.630               | 51.13                | 55.0                            | 3.0                                 |
| 50.0            | 164.0         | 10.740               | 51.33                | 55.0                            | 3.0                                 |
| 52.0            | 170.6         | 10.840               | 51.51                | 50.0                            | 2.7                                 |
| 54.0            | 177.1         | 10.980               | 51.76                | 70.0                            | 3.8                                 |
| 56.0            | 183.7         | 11.150               | 52.07                | 85.0                            | 4.7                                 |
| 58.0            | 190.2         | 11.290               | 52.32                | 70.0                            | 3.8                                 |
| 60.0            | 196.8         | 11.440               | 52.59                | 75.0                            | 4.1                                 |
| 62.0            | 203.4         | 11.610               | 52.90                | 85.0                            | 4.7                                 |
| 64.0            | 209.9         | 11.760               | 53.17                | 75.0                            | 4.1                                 |
| 66.0            | 216.5         | 11.910               | 53.44                | 75.0                            | 4.1                                 |
| 68.0            | 223.0         | 12.060               | 53.71                | 75.0                            | 4.1                                 |
| 70.0            | 229.6         | 12.220               | 54.00                | 80.0                            | 4.4                                 |
| 72.0            | 236.2         | 12.350               | 54.23                | 65.0                            | 3.6                                 |
| 74.0            | 242.7         | 12.520               | 54.54                | 85.0                            | 4.7                                 |
| 76.0            | 249.3         | 12.660               | 54.79                | 70.0                            | 3.8                                 |
| 78.0            | 255.8         | 12.780               | 55.00                | 60.0                            | 3.3                                 |
| 80.0            | 262.4         | 12.880               | 55.18                | 50.0                            | 2.7                                 |
| 82.0            | 269.0         | 12.980               | 55.36                | 50.0                            | 2.7                                 |
| 84.0            | 275.5         | 13.090               | 55.56                | 55.0                            | 3.0                                 |
| 86.0            | 282.1         | 13.210               | 55.78                | 60.0                            | 3.3                                 |
| 88.0            | 288.6         | 13.310               | 55.96                | 50.0                            | 2.7                                 |
| 90.0            | 295.2         | 13.410               | 56.14                | 50.0                            | 2.5                                 |
| 92.0            | 301.8         | 13.500               | 56.30                | 45.0                            | 2.5                                 |
| 94.0            | 308.3         | 13.650               | 56.57                | 75.0                            | 4.1                                 |
| 96.0            | 314.9         | 13.740               | 56.73                | 45.0                            | 2.5                                 |
| 98.0            | 321.4         | 13.850               | 56.93                | 55.0                            | 3.0                                 |
| 100.0           | 328.0         | 14.000               | 57.20                | 75.0                            | 4.1                                 |
| 102.0           | 334.6         | 14.110               | 57.40                | 55.0                            | 3.0                                 |
| 104.0           | 341.1         | 14.270               | 57.69                | 80.0                            | 4.4                                 |
| 106.0           | 347.7         | 14.380               | 57.88                | 55.0                            | 3.0                                 |
| 108.0           | 354.2         | 14.540               | 58.17                | 80.0                            | 4.4                                 |
| 110.0           | 360.8         | 14.700               | 58.46                | 80.0                            | 4.4                                 |
| 112.0           | 367.4         | 14.820               | 58.68                | 60.0                            | 3.3                                 |
| 114.0           | 373.9         | 14.980               | 58.96                | 80.0                            | 4.4                                 |
| 116.0           | 380.5         | 15.150               | 59.27                | 85.0                            | 4.7                                 |

LOCATION: ROSEBURG AMS, OREGON

PAGE 2

19S/ 6E-25DCD


HOLE NAME: N FORK

DATE MEASURED: 9/17/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 118.0           | 387.0         | 15.360      | 59.65 | 105.0               | 4.0          |
| 120.0           | 393.0         | 15.550      | 59.99 | 95.0                | 4.0          |
| 122.0           | 400.0         | 15.790      | 60.42 | 120.0               | 4.0          |
| 124.0           | 406.0         | 15.980      | 60.76 | 95.0                | 4.0          |
| 126.0           | 413.0         | 16.190      | 61.14 | 105.0               | 4.4          |
| 128.0           | 419.0         | 16.350      | 61.43 | 80.0                | 4.4          |
| 130.0           | 426.4         | 16.520      | 61.74 | 85.0                | 4.7          |
| 132.0           | 433.0         | 16.700      | 62.06 | 90.0                | 4.7          |
| 134.0           | 439.0         | 16.880      | 62.38 | 90.0                | 4.7          |
| 136.0           | 446.0         | 17.050      | 62.69 | 85.0                | 4.7          |
| 138.0           | 452.0         | 17.220      | 63.00 | 85.0                | 4.7          |
| 140.0           | 459.0         | 17.410      | 63.34 | 95.0                | 4.7          |
| 142.0           | 465.0         | 17.600      | 63.68 | 95.0                | 4.7          |
| 144.0           | 472.0         | 17.750      | 63.95 | 75.0                | 4.1          |
| 146.0           | 478.9         | 17.910      | 64.24 | 80.0                | 4.4          |
| 148.0           | 485.4         | 18.070      | 64.53 | 80.0                | 4.4          |
| 150.0           | 492.0         | 18.190      | 64.74 | 60.0                | 3.0          |
| 152.0           | 498.6         | 18.510      | 65.32 | 160.0               | 0.0          |

TEMPERATURE, DEG C


DEPTH, METERS

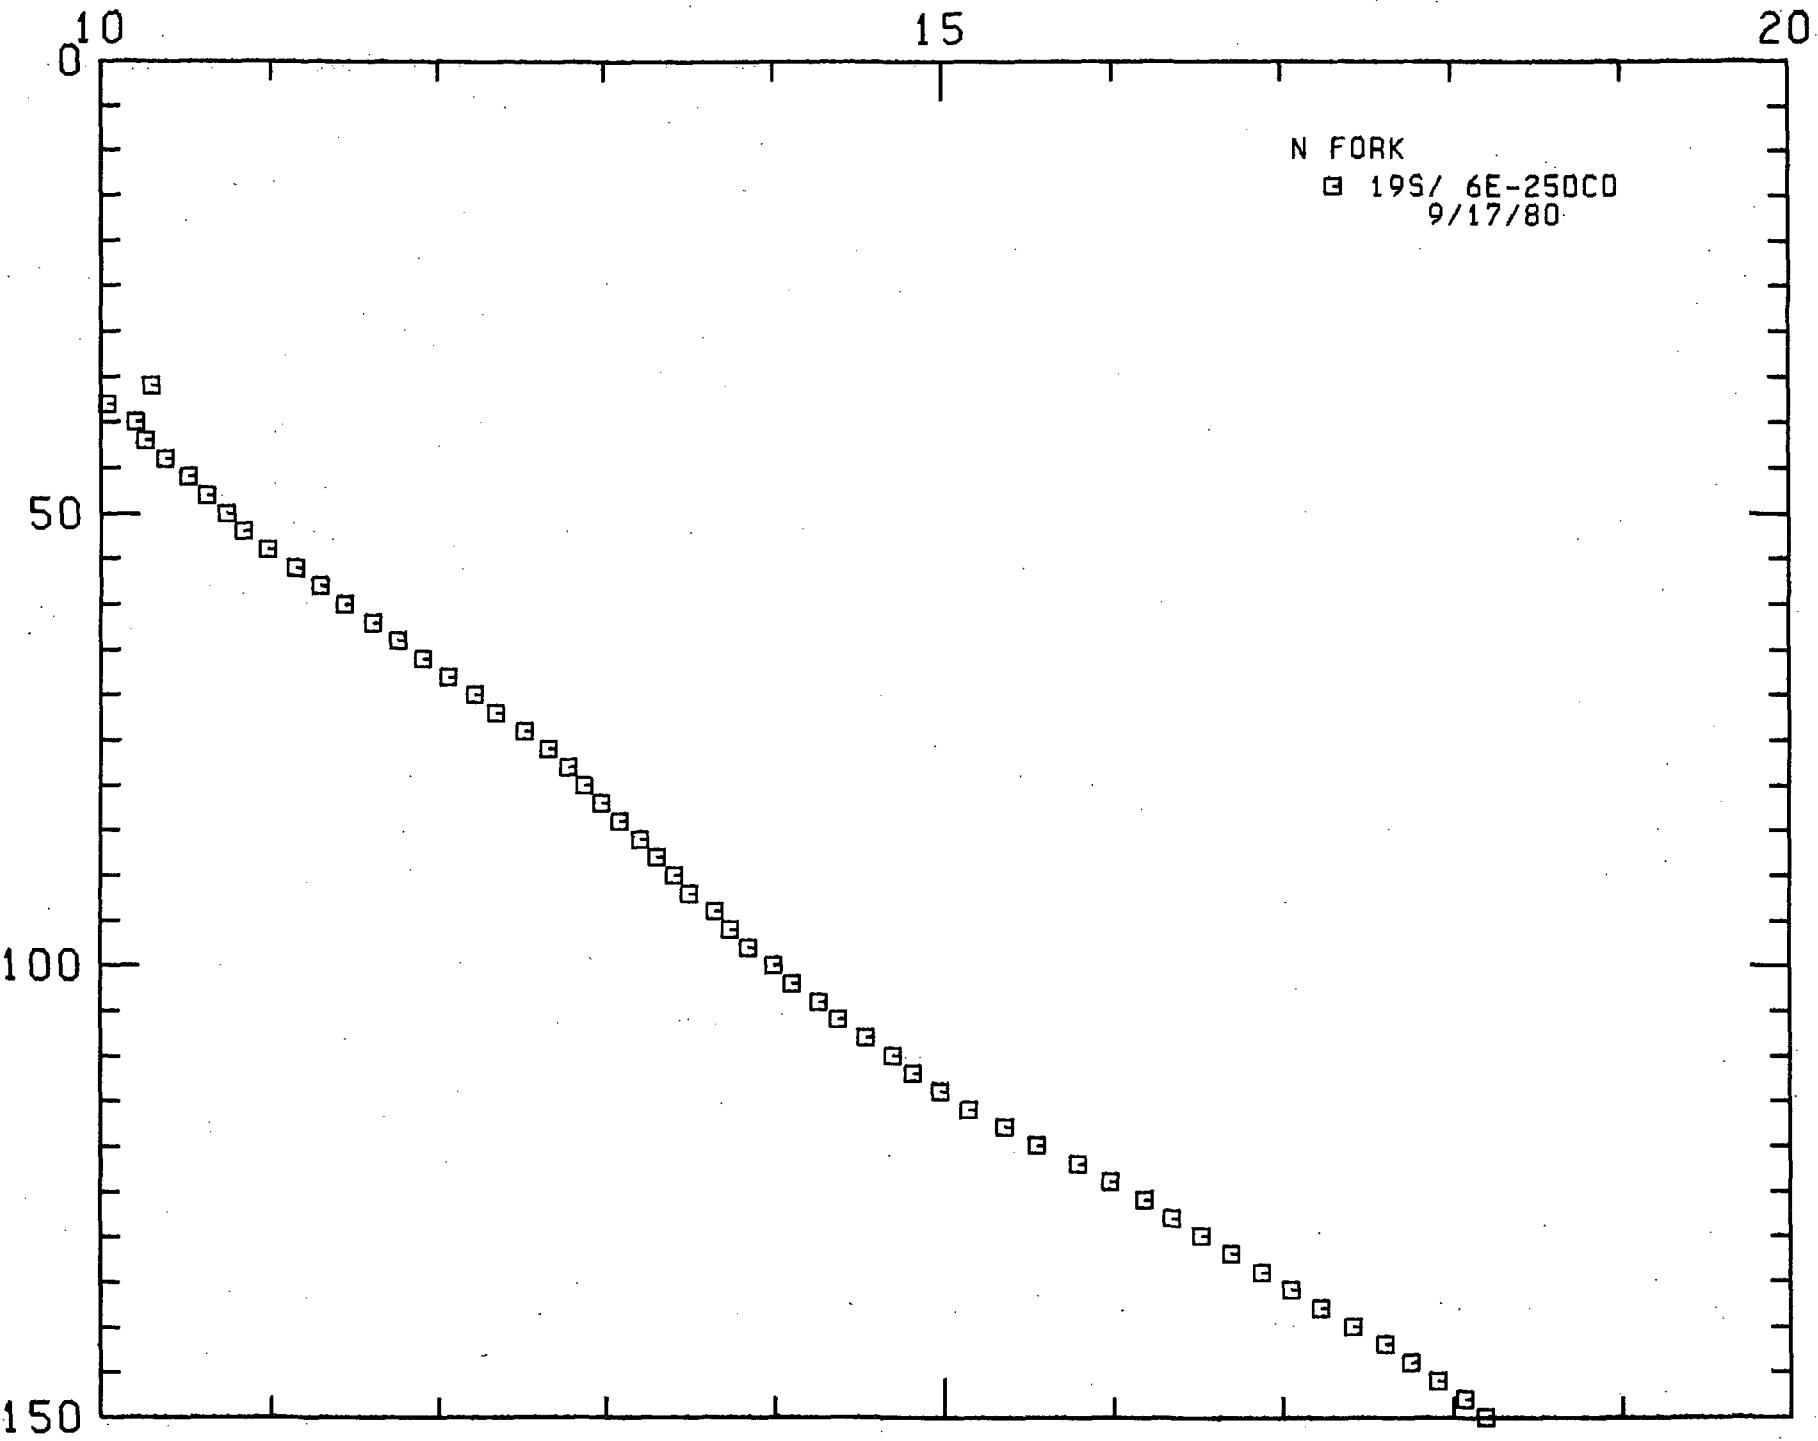

LOCATION: ROSEBURG AMS, OREGON  
 20S / 3E - 26DA  
 HOLE NUMBER: LS-44  
 DATE MEASURED: 9/28/76

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | TEMPERATURE<br>DEG F | GEOTHERMAL GRADIENT<br>DEG C/KM | GEOTHERMAL GRADIENT<br>DEG F/100 FT |
|-----------------|---------------|----------------------|----------------------|---------------------------------|-------------------------------------|
| 20.0            | 65.6          | 9.020                | 48.34                | 0.0                             | 0.0                                 |
| 30.0            | 98.4          | 9.110                | 48.36                | 0.0                             | 0.0                                 |
| 40.0            | 131.2         | 9.400                | 49.90                | 0.0                             | 1.6667                              |
| 45.0            | 147.6         | 9.510                | 49.12                | 0.0                             | 1.1111                              |
| 50.0            | 164.0         | 9.570                | 49.23                | 12.0                            | 0.1724                              |
| 55.0            | 180.4         | 9.690                | 49.42                | 22.0                            | 1.14                                |
| 60.0            | 196.8         | 9.810                | 49.66                | 26.0                            | 1.45                                |
| 65.0            | 213.2         | 9.940                | 49.89                | 26.0                            | 1.45                                |
| 70.0            | 229.6         | 10.080               | 50.14                | 26.0                            | 1.45                                |
| 75.0            | 246.0         | 10.250               | 50.45                | 34.0                            | 1.1111                              |
| 80.0            | 262.4         | 10.430               | 50.77                | 36.0                            | 1.05                                |
| 85.0            | 278.8         | 10.620               | 51.12                | 36.0                            | 1.05                                |
| 90.0            | 295.2         | 10.800               | 51.44                | 36.0                            | 1.05                                |
| 95.0            | 311.6         | 10.960               | 51.73                | 36.0                            | 1.05                                |
| 100.0           | 328.0         | 11.140               | 52.00                | 36.0                            | 1.05                                |
| 105.0           | 344.4         | 11.320               | 52.30                | 36.0                            | 1.05                                |
| 110.0           | 360.8         | 11.530               | 52.76                | 40.0                            | 1.1111                              |
| 115.0           | 377.2         | 11.720               | 53.19                | 40.0                            | 1.1111                              |
| 120.0           | 393.6         | 12.000               | 53.60                | 40.0                            | 1.1111                              |
| 125.0           | 410.0         | 12.190               | 53.94                | 40.0                            | 1.1111                              |
| 130.0           | 426.4         | 12.390               | 54.30                | 40.0                            | 1.1111                              |
| 135.0           | 442.8         | 12.590               | 54.66                | 40.0                            | 1.1111                              |
| 140.0           | 459.2         | 12.850               | 55.13                | 52.0                            | 1.1111                              |

TEMPERATURE, DEG C

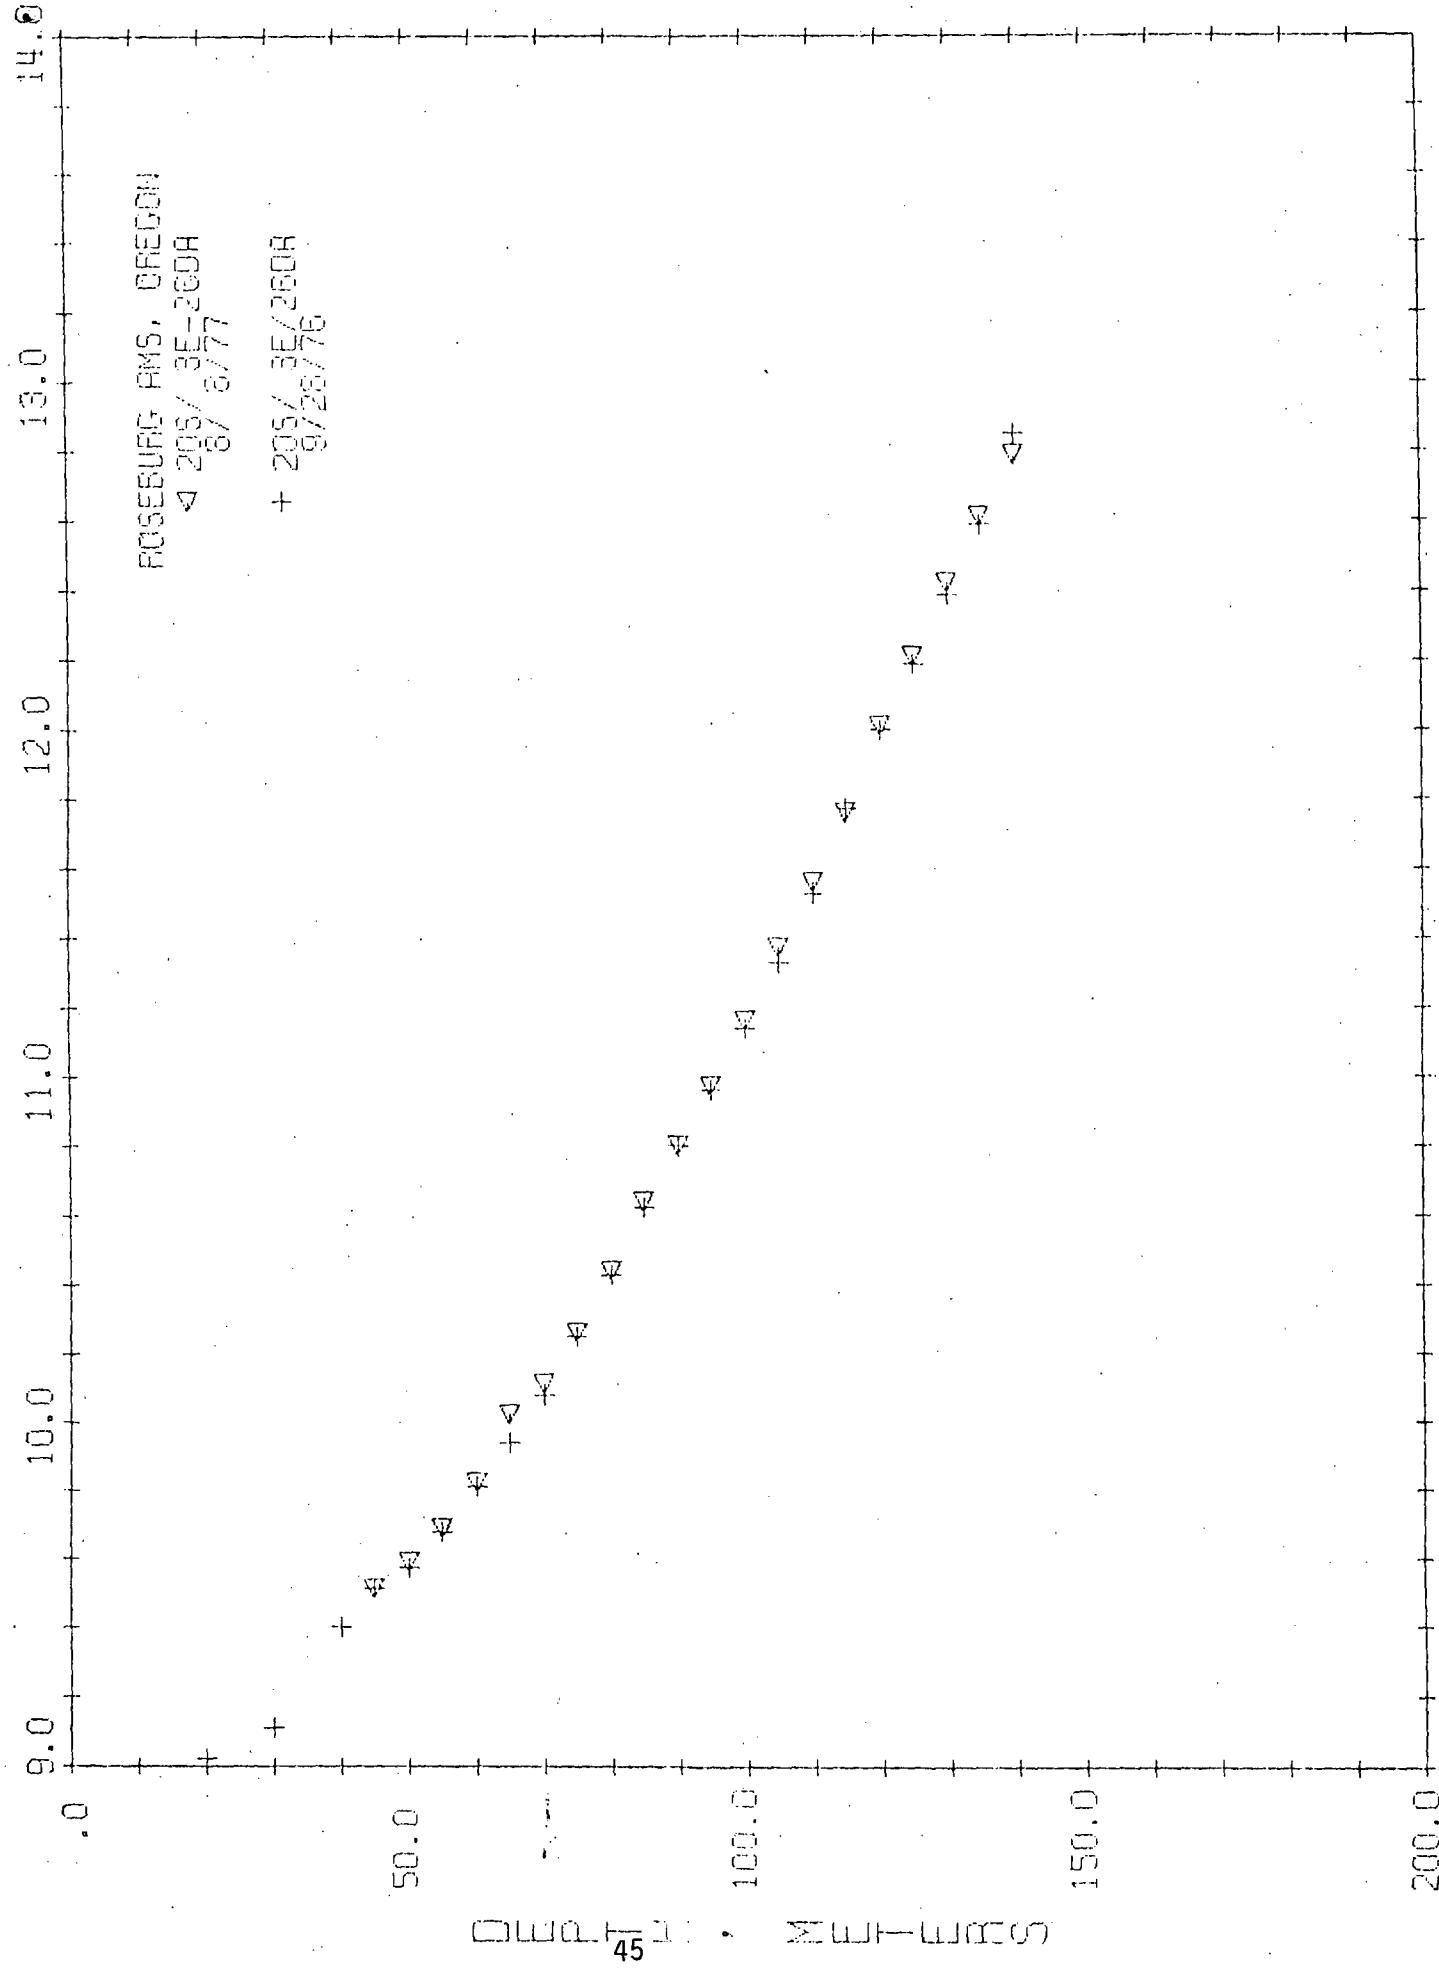

( )  
TEMPERATURE, DEG C

5.0

10.0

15.0

20.0

25.0


46

CHART NO. 1000000

150.0

100.0

50.0

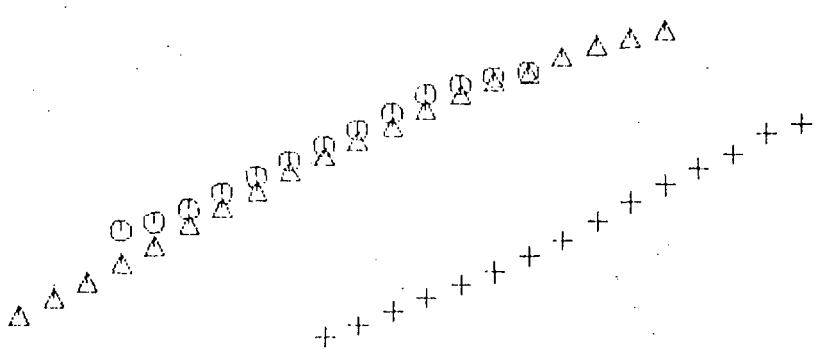

ROSEBURG AMS, OREGON

6 205/3E-26 CD  
8/8/77

▲ 205/3E-260A  
8/8/77

+ 205/3E-1090  
8/8/77

LOCATION: ROSEBURG AMS, OREGON  
 20S / 4E - 27DDD  
 HOLE NAME: WALL CRK  
 DATE MEASURED: 9/17/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | TEMPERATURE<br>DEG F | GEO THERMAL GRADIENT<br>DEG C/KM | GEO THERMAL GRADIENT<br>DEG F/100 FT |
|-----------------|---------------|----------------------|----------------------|----------------------------------|--------------------------------------|
| 8.0             | 26.2          | 8.980                | 48.16                | 0.0                              | 0.0                                  |
| 10.0            | 32.8          | 8.800                | 47.84                | -90.0                            | -4.9                                 |
| 12.0            | 39.4          | 8.840                | 47.91                | 20.0                             | 1.1                                  |
| 14.0            | 45.9          | 8.880                | 47.98                | 20.0                             | 1.1                                  |
| 16.0            | 52.5          | 8.930                | 48.07                | 25.0                             | 1.4                                  |
| 18.0            | 59.0          | 9.020                | 48.24                | 45.0                             | 2.5                                  |
| 20.0            | 65.6          | 9.160                | 48.49                | 70.0                             | 4.7                                  |
| 22.0            | 72.2          | 9.330                | 48.79                | 85.0                             | 2.5                                  |
| 24.0            | 78.7          | 9.420                | 48.96                | 45.0                             | 2.5                                  |
| 26.0            | 85.3          | 9.650                | 49.37                | 115.0                            | 6.0                                  |
| 28.0            | 91.8          | 9.690                | 49.44                | 20.0                             | 1.1                                  |
| 30.0            | 98.4          | 9.740                | 49.53                | 25.0                             | 1.4                                  |
| 32.0            | 105.0         | 10.070               | 50.13                | 165.0                            | 9.1                                  |
| 34.0            | 111.5         | 10.290               | 50.52                | 110.0                            | 6.0                                  |
| 36.0            | 118.1         | 10.490               | 50.88                | 100.0                            | 5.5                                  |
| 38.0            | 124.6         | 10.700               | 51.26                | 105.0                            | 5.0                                  |
| 40.0            | 131.2         | 11.020               | 51.84                | 160.0                            | 8.0                                  |
| 42.0            | 137.8         | 11.140               | 52.05                | 60.0                             | 3.0                                  |
| 44.0            | 144.3         | 11.180               | 52.12                | 20.0                             | 1.1                                  |
| 46.0            | 150.9         | 11.280               | 52.38                | 50.0                             | 3.0                                  |
| 48.0            | 157.4         | 11.400               | 52.52                | 60.0                             | 3.0                                  |
| 50.0            | 164.0         | 11.530               | 52.75                | 65.0                             | 3.0                                  |
| 52.0            | 170.6         | 11.660               | 52.99                | 65.0                             | 3.0                                  |
| 54.0            | 177.1         | 11.790               | 53.23                | 65.0                             | 3.0                                  |
| 56.0            | 183.7         | 11.910               | 53.44                | 60.0                             | 3.0                                  |
| 58.0            | 190.2         | 12.040               | 53.67                | 65.0                             | 3.0                                  |
| 60.0            | 196.8         | 12.160               | 53.89                | 60.0                             | 3.0                                  |
| 62.0            | 203.4         | 12.250               | 54.05                | 45.0                             | 2.5                                  |
| 64.0            | 209.9         | 12.300               | 54.14                | 25.0                             | 1.4                                  |
| 66.0            | 216.5         | 12.510               | 54.52                | 105.0                            | 5.0                                  |
| 68.0            | 223.0         | 12.760               | 54.97                | 125.0                            | 6.9                                  |
| 70.0            | 229.6         | 12.910               | 55.24                | 75.0                             | 4.1                                  |
| 72.0            | 236.2         | 13.070               | 55.53                | 80.0                             | 4.4                                  |
| 74.0            | 242.7         | 13.190               | 55.74                | 60.0                             | 3.3                                  |
| 76.0            | 249.3         | 13.330               | 55.99                | 70.0                             | 3.0                                  |
| 78.0            | 255.8         | 13.470               | 56.25                | 70.0                             | 3.0                                  |
| 80.0            | 262.4         | 13.610               | 56.50                | 70.0                             | 3.0                                  |
| 82.0            | 269.0         | 13.760               | 56.77                | 75.0                             | 4.1                                  |
| 84.0            | 275.5         | 13.900               | 57.02                | 70.0                             | 3.0                                  |
| 86.0            | 282.1         | 14.050               | 57.29                | 75.0                             | 4.1                                  |
| 88.0            | 288.6         | 14.200               | 57.56                | 75.0                             | 4.1                                  |

LOCATION: ROSEBURG AMS, OREGON

PAGE 2

20S/ 4E-27DDD


HOLE NAME: WALL CRK

DATE MEASURED: 9/17/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 90.0            | 295.2         | 14.360      | 57.85 | 80.0                | 4.4          |
| 92.0            | 301.0         | 14.510      | 58.12 | 75.0                | 4.1          |
| 94.0            | 308.3         | 14.650      | 58.37 | 70.0                | 3.8          |
| 96.0            | 314.9         | 14.790      | 58.62 | 70.0                | 3.8          |
| 98.0            | 321.4         | 14.940      | 58.89 | 75.0                | 4.1          |
| 100.0           | 328.0         | 15.080      | 59.14 | 70.0                | 3.8          |
| 102.0           | 334.6         | 15.230      | 59.41 | 75.0                | 4.1          |
| 104.0           | 341.1         | 15.370      | 59.67 | 70.0                | 3.8          |
| 106.0           | 347.7         | 15.520      | 59.94 | 75.0                | 4.1          |
| 108.0           | 354.2         | 15.680      | 60.22 | 80.0                | 4.4          |
| 110.0           | 360.8         | 15.830      | 60.49 | 75.0                | 4.1          |
| 112.0           | 367.4         | 15.970      | 60.75 | 70.0                | 3.8          |
| 114.0           | 373.9         | 16.120      | 61.02 | 75.0                | 4.1          |
| 116.0           | 380.5         | 16.280      | 61.30 | 80.0                | 4.4          |
| 118.0           | 387.0         | 16.430      | 61.57 | 75.0                | 4.1          |
| 120.0           | 393.6         | 16.570      | 61.83 | 70.0                | 3.8          |
| 122.0           | 400.2         | 16.720      | 62.10 | 75.0                | 4.1          |
| 124.0           | 406.7         | 16.860      | 62.35 | 70.0                | 3.8          |
| 126.0           | 413.3         | 17.020      | 62.64 | 80.0                | 4.4          |
| 128.0           | 419.8         | 17.190      | 62.94 | 85.0                | 4.7          |
| 130.0           | 426.4         | 17.330      | 63.19 | 70.0                | 3.8          |
| 132.0           | 433.0         | 17.510      | 63.52 | 90.0                | 4.9          |
| 134.0           | 439.5         | 17.650      | 63.77 | 70.0                | 3.8          |

TEMPERATURE, DEG C


DEPTH, METERS

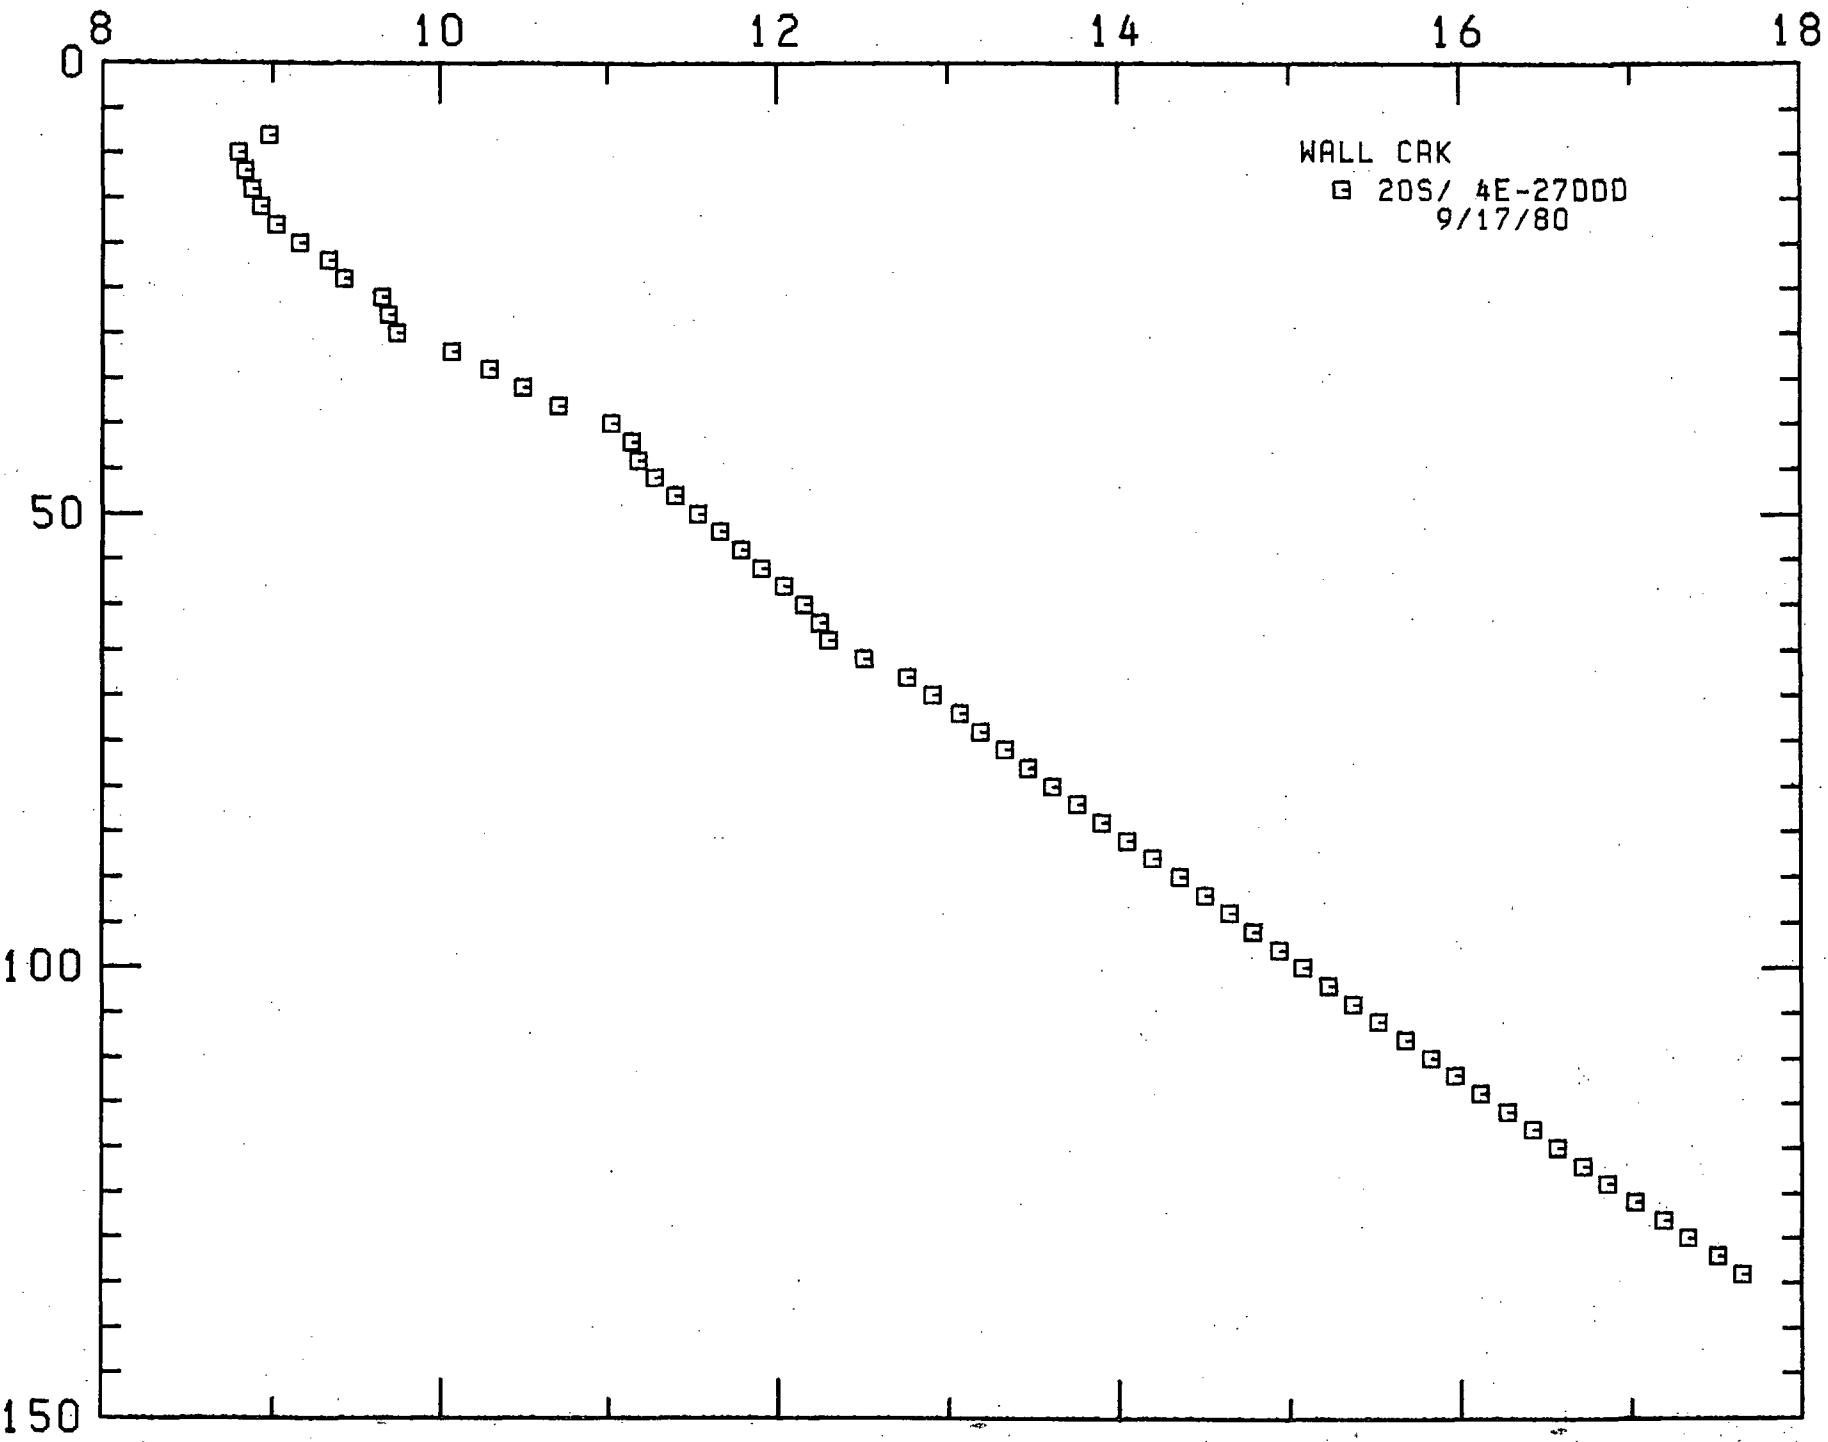

LOCATION: ROSEBURG AMS, OREGON  
205/ 3E-26CD  
HOLE NUMBER: AE-114  
DATE MEASURED: 8/ 8/77

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | DEG F | GEO THERMAL GRADIENT<br>DEG C/KM | DEG F/100 FT |
|-----------------|---------------|----------------------|-------|----------------------------------|--------------|
| 65.0            | 213.2         | 10.010               | 50.02 | 0.0                              | 0.0          |
| 70.0            | 229.6         | 10.050               | 50.11 | 10.0                             | 0.5          |
| 75.0            | 246.0         | 10.180               | 50.29 | 20.0                             | 1.1          |
| 80.0            | 262.4         | 10.270               | 50.49 | 22.0                             | 1.3          |
| 85.0            | 278.8         | 10.490               | 50.88 | 44.0                             | 2.3          |
| 90.0            | 295.2         | 10.580               | 51.32 | 38.0                             | 2.1          |
| 95.0            | 311.6         | 10.880               | 51.99 | 36.0                             | 2.0          |
| 100.0           | 328.0         | 11.040               | 51.87 | 36.0                             | 2.0          |
| 105.0           | 344.4         | 11.230               | 52.36 | 36.0                             | 2.0          |
| 110.0           | 360.8         | 11.390               | 52.60 | 34.0                             | 1.9          |
| 115.0           | 377.2         | 11.580               | 52.84 | 36.0                             | 2.1          |
| 120.0           | 393.6         | 11.730               | 53.11 | 30.0                             | 1.7          |
| 125.0           | 410.0         | 11.830               | 53.29 | 20.0                             | 1.1          |

TEMPERATURE, DEG C

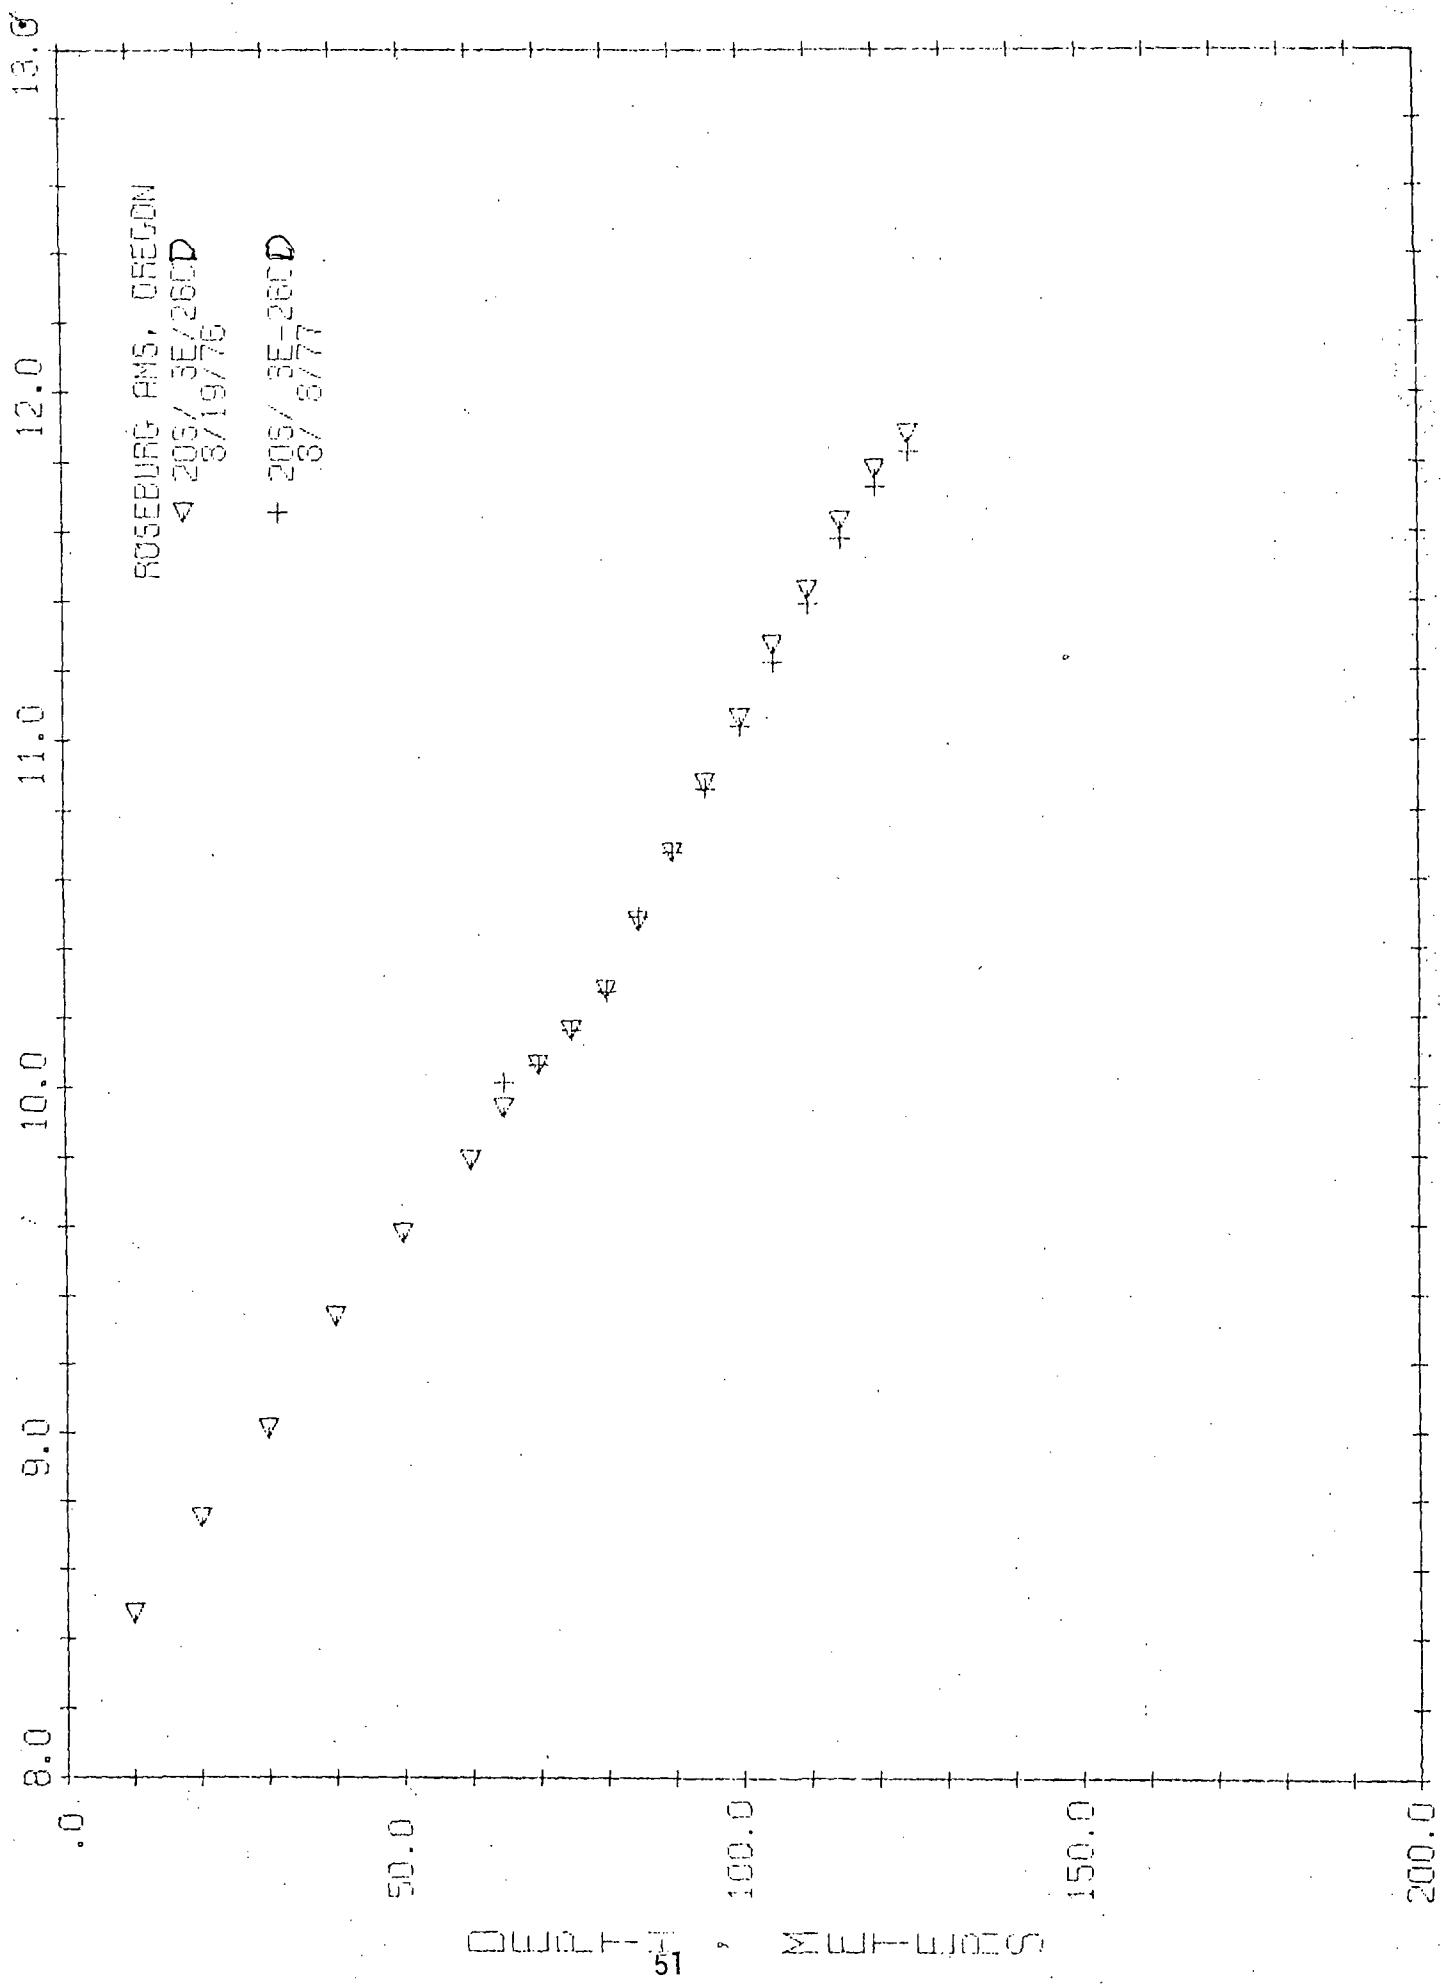

LOCATION: ROSEBURG, OREGON  
205-36-26D  
HOLE NUMBER: HE-111  
DATE MEASURED: 8/19/25

DATE MEASURED: 8/19/76

卷之三

PENT

| DEPTH<br>FEET | TEMPERATURE<br>DEG C | TEMPERATURE<br>DEG F |
|---------------|----------------------|----------------------|
| 0             | 10.0                 | 50.0                 |
| 100           | 10.0                 | 50.0                 |
| 200           | 10.0                 | 50.0                 |
| 300           | 10.0                 | 50.0                 |
| 400           | 10.0                 | 50.0                 |
| 500           | 10.0                 | 50.0                 |
| 600           | 10.0                 | 50.0                 |
| 700           | 10.0                 | 50.0                 |
| 800           | 10.0                 | 50.0                 |
| 900           | 10.0                 | 50.0                 |
| 1000          | 10.0                 | 50.0                 |
| 1100          | 10.0                 | 50.0                 |
| 1200          | 10.0                 | 50.0                 |
| 1300          | 10.0                 | 50.0                 |
| 1400          | 10.0                 | 50.0                 |
| 1500          | 10.0                 | 50.0                 |
| 1600          | 10.0                 | 50.0                 |
| 1700          | 10.0                 | 50.0                 |
| 1800          | 10.0                 | 50.0                 |
| 1900          | 10.0                 | 50.0                 |
| 2000          | 10.0                 | 50.0                 |
| 2100          | 10.0                 | 50.0                 |
| 2200          | 10.0                 | 50.0                 |
| 2300          | 10.0                 | 50.0                 |
| 2400          | 10.0                 | 50.0                 |
| 2500          | 10.0                 | 50.0                 |
| 2600          | 10.0                 | 50.0                 |
| 2700          | 10.0                 | 50.0                 |
| 2800          | 10.0                 | 50.0                 |
| 2900          | 10.0                 | 50.0                 |
| 3000          | 10.0                 | 50.0                 |
| 3100          | 10.0                 | 50.0                 |
| 3200          | 10.0                 | 50.0                 |
| 3300          | 10.0                 | 50.0                 |
| 3400          | 10.0                 | 50.0                 |
| 3500          | 10.0                 | 50.0                 |
| 3600          | 10.0                 | 50.0                 |
| 3700          | 10.0                 | 50.0                 |
| 3800          | 10.0                 | 50.0                 |
| 3900          | 10.0                 | 50.0                 |
| 4000          | 10.0                 | 50.0                 |
| 4100          | 10.0                 | 50.0                 |
| 4200          | 10.0                 | 50.0                 |
| 4300          | 10.0                 | 50.0                 |
| 4400          | 10.0                 | 50.0                 |
| 4500          | 10.0                 | 50.0                 |
| 4600          | 10.0                 | 50.0                 |
| 4700          | 10.0                 | 50.0                 |
| 4800          | 10.0                 | 50.0                 |
| 4900          | 10.0                 | 50.0                 |
| 5000          | 10.0                 | 50.0                 |
| 5100          | 10.0                 | 50.0                 |
| 5200          | 10.0                 | 50.0                 |
| 5300          | 10.0                 | 50.0                 |
| 5400          | 10.0                 | 50.0                 |
| 5500          | 10.0                 | 50.0                 |
| 5600          | 10.0                 | 50.0                 |
| 5700          | 10.0                 | 50.0                 |
| 5800          | 10.0                 | 50.0                 |
| 5900          | 10.0                 | 50.0                 |
| 6000          | 10.0                 | 50.0                 |
| 6100          | 10.0                 | 50.0                 |
| 6200          | 10.0                 | 50.0                 |
| 6300          | 10.0                 | 50.0                 |
| 6400          | 10.0                 | 50.0                 |
| 6500          | 10.0                 | 50.0                 |
| 6600          | 10.0                 | 50.0                 |
| 6700          | 10.0                 | 50.0                 |
| 6800          | 10.0                 | 50.0                 |
| 6900          | 10.0                 | 50.0                 |
| 7000          | 10.0                 | 50.0                 |
| 7100          | 10.0                 | 50.0                 |
| 7200          | 10.0                 | 50.0                 |
| 7300          | 10.0                 | 50.0                 |
| 7400          | 10.0                 | 50.0                 |
| 7500          | 10.0                 | 50.0                 |
| 7600          | 10.0                 | 50.0                 |
| 7700          | 10.0                 | 50.0                 |
| 7800          | 10.0                 | 50.0                 |
| 7900          | 10.0                 | 50.0                 |
| 8000          | 10.0                 | 50.0                 |
| 8100          | 10.0                 | 50.0                 |
| 8200          | 10.0                 | 50.0                 |
| 8300          | 10.0                 | 50.0                 |
| 8400          | 10.0                 | 50.0                 |
| 8500          | 10.0                 | 50.0                 |
| 8600          | 10.0                 | 50.0                 |
| 8700          | 10.0                 | 50.0                 |
| 8800          | 10.0                 | 50.0                 |
| 8900          | 10.0                 | 50.0                 |
| 9000          | 10.0                 | 50.0                 |
| 9100          | 10.0                 | 50.0                 |
| 9200          | 10.0                 | 50.0                 |
| 9300          | 10.0                 | 50.0                 |
| 9400          | 10.0                 | 50.0                 |
| 9500          | 10.0                 | 50.0                 |
| 9600          | 10.0                 | 50.0                 |
| 9700          | 10.0                 | 50.0                 |
| 9800          | 10.0                 | 50.0                 |
| 9900          | 10.0                 | 50.0                 |
| 10000         | 10.0                 | 50.0                 |

TEMPERATURE DEG F

GEO THERMAL GRADIENT DEG C / DEG F / 100 FT

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 110 | 115 | 120 | 125 | 130 | 135 | 140 | 145 | 150 | 155 | 160 | 165 | 170 | 175 | 180 | 185 | 190 |
| 60  | 65  | 70  | 75  | 80  | 85  | 90  | 95  | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 |
| 60  | 65  | 70  | 75  | 80  | 85  | 90  | 95  | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 |
| 60  | 65  | 70  | 75  | 80  | 85  | 90  | 95  | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 |
| 60  | 65  | 70  | 75  | 80  | 85  | 90  | 95  | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 |

LOCATION: ROSEBURG AMS, OREGON

21S/ SE-16ACD

HOLE NAME: BLACK CRK

DATE MEASURED: 9/16/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 42.0            | 137.9         | 7.890       | 46.20 | 0.0                 | 0.0          |
| 44.0            | 144.3         | 7.490       | 45.48 | -200.0              | -11.0        |
| 46.0            | 150.9         | 7.510       | 45.52 | 10.0                | 0.0          |
| 48.0            | 157.4         | 7.530       | 45.55 | 10.0                | 0.0          |
| 50.0            | 164.0         | 7.560       | 45.61 | 15.0                | 0.0          |
| 52.0            | 170.6         | 7.580       | 45.64 | 10.0                | 0.0          |
| 54.0            | 177.1         | 7.600       | 45.68 | 10.0                | 0.0          |
| 56.0            | 183.7         | 7.630       | 45.72 | 15.0                | 0.0          |
| 58.0            | 190.3         | 7.650       | 45.77 | 10.0                | 0.0          |
| 60.0            | 196.9         | 7.650       | 45.77 | 0.0                 | 0.0          |
| 62.0            | 203.4         | 7.660       | 45.82 | 0.0                 | 0.0          |
| 64.0            | 209.9         | 7.670       | 45.86 | 0.0                 | 0.0          |
| 66.0            | 216.5         | 7.680       | 45.91 | 0.0                 | 0.0          |
| 68.0            | 223.1         | 7.690       | 45.94 | 0.0                 | 0.0          |
| 70.0            | 229.7         | 7.700       | 45.98 | 0.0                 | 0.0          |
| 72.0            | 236.3         | 7.710       | 46.02 | 0.0                 | 0.0          |
| 74.0            | 242.9         | 7.710       | 46.02 | 0.0                 | 0.0          |
| 76.0            | 249.5         | 7.720       | 46.05 | 0.0                 | 0.0          |
| 78.0            | 255.0         | 7.730       | 46.09 | 0.0                 | 0.0          |
| 80.0            | 262.4         | 7.750       | 46.15 | 0.0                 | 0.0          |
| 82.0            | 269.0         | 7.780       | 46.20 | 15.0                | 0.0          |
| 84.0            | 275.6         | 7.810       | 46.26 | 15.0                | 0.0          |
| 86.0            | 282.1         | 7.830       | 46.30 | 10.0                | 0.0          |
| 88.0            | 288.7         | 7.830       | 46.30 | 0.0                 | 0.0          |
| 90.0            | 295.3         | 7.840       | 46.11 | 25.0                | 1.4          |
| 92.0            | 301.9         | 7.890       | 46.20 | 5.0                 | 0.35         |
| 94.0            | 308.5         | 7.900       | 46.22 | -10.0               | 1.4          |
| 96.0            | 314.0         | 7.880       | 46.18 | 25.0                | 0.35         |
| 98.0            | 321.4         | 7.930       | 46.27 | 5.0                 | 1.4          |
| 100.0           | 328.0         | 7.940       | 46.29 | -20.0               | 0.3          |
| 102.0           | 334.6         | 7.900       | 46.22 | -20.0               | -1.1         |

TEMPERATURE, DEG C

54

0

5

10

BLCK CRK


21S/ 5E-16ACD  
9/16/80

תרכז, ממד רבד

50

100

150



LOCATION: ROSEBURG AMS, OREGON

21S/ 3E-17DA

HOLE NAME: OAKR CW6


DATE MEASURED: 2/21/79

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 5.0             | 16.4          | 12.250      | 54.05 | 0.0                 | 0.0          |
| 10.0            | 32.8          | 12.280      | 54.10 | 6.0                 | 0.3          |
| 15.0            | 49.2          | 12.860      | 55.15 | 116.0               | 6.4          |
| 20.0            | 65.6          | 13.010      | 55.42 | 30.0                | 1.6          |
| 25.0            | 82.0          | 13.110      | 55.60 | 20.0                | 1.1          |
| 30.0            | 98.4          | 13.380      | 56.08 | 54.0                | 3.0          |
| 35.0            | 114.8         | 13.550      | 56.39 | 34.0                | 1.9          |
| 40.0            | 131.2         | 13.730      | 56.71 | 36.0                | 2.0          |
| 45.0            | 147.6         | 13.900      | 57.02 | 34.0                | 1.9          |
| 50.0            | 164.0         | 14.160      | 57.49 | 52.0                | 2.9          |
| 55.0            | 180.4         | 14.440      | 57.99 | 56.0                | 3.1          |
| 60.0            | 196.8         | 14.760      | 58.57 | 64.0                | 3.5          |
| 65.0            | 213.2         | 14.920      | 58.86 | 32.0                | 1.8          |
| 70.0            | 229.6         | 15.160      | 59.29 | 48.0                | 2.6          |
| 75.0            | 246.0         | 15.500      | 59.90 | 68.0                | 3.7          |
| 80.0            | 262.4         | 15.780      | 60.40 | 56.0                | 3.1          |
| 85.0            | 278.8         | 15.870      | 60.57 | 18.0                | 1.0          |
| 90.0            | 295.2         | 15.990      | 60.78 | 24.0                | 1.3          |
| 95.0            | 311.6         | 16.100      | 60.98 | 22.0                | 1.2          |
| 100.0           | 328.0         | 16.210      | 61.18 | 22.0                | 1.2          |
| 105.0           | 344.4         | 16.930      | 62.47 | 144.0               | 7.9          |
| 105.0           | 344.4         | 16.930      | 62.47 | 0.0                 | -0.0         |
| 110.0           | 360.8         | 17.120      | 62.82 | 38.0                | 2.1          |
| 115.0           | 377.2         | 17.380      | 63.28 | 52.0                | 2.9          |
| 120.0           | 393.6         | 17.620      | 63.72 | 48.0                | 2.6          |
| 125.0           | 410.0         | 17.710      | 63.88 | 18.0                | 1.0          |

UERIH, MELIERS

56

TEMPERATURE, DEG C

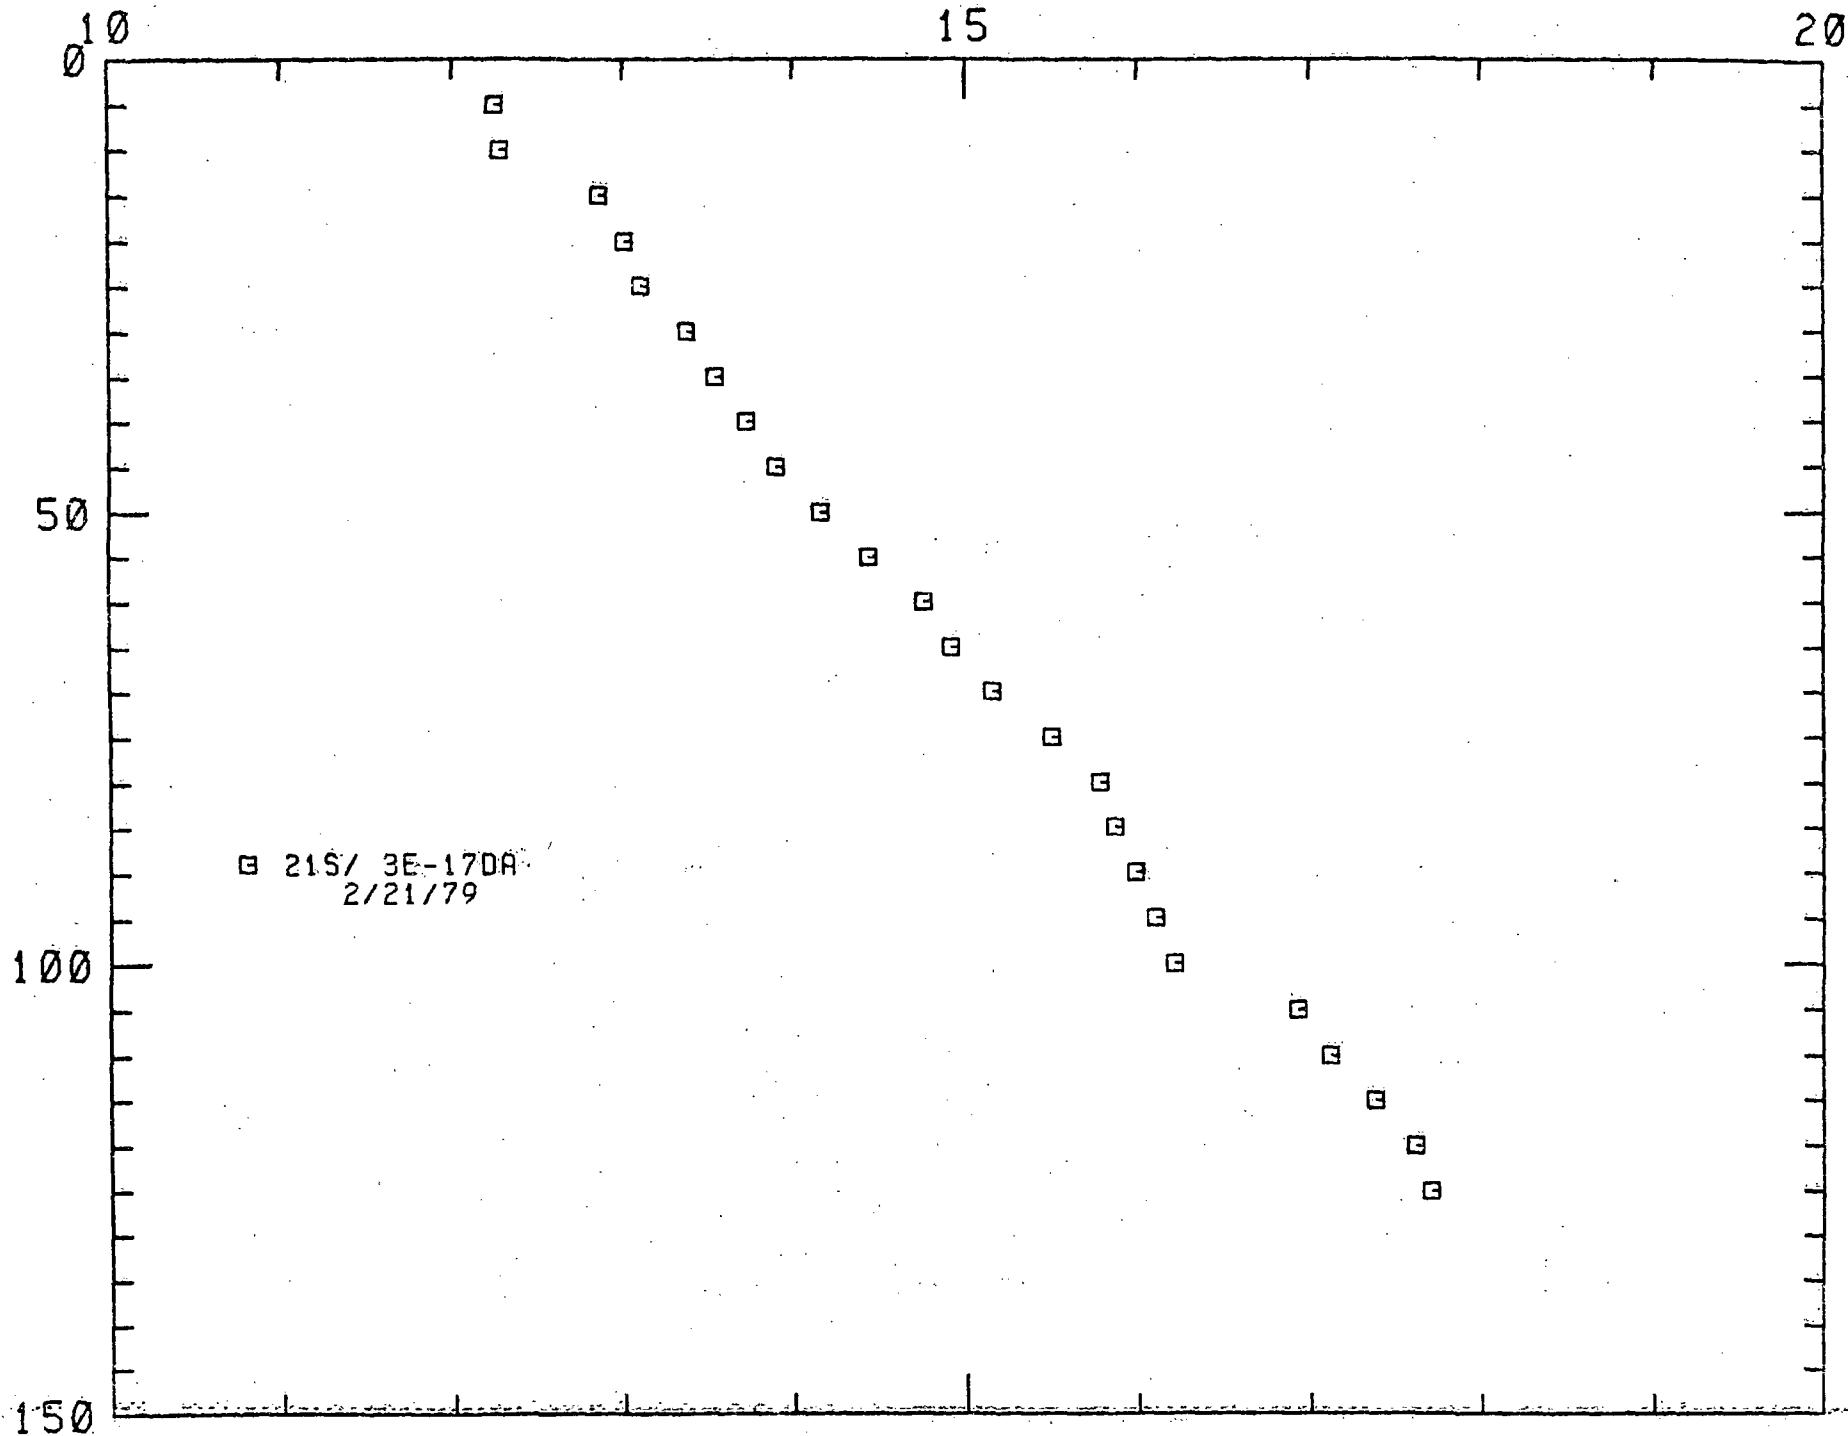

**ROSEBURG AREA**

**LOCATION: HILLS CREEK DAM, OREGON  
21S/ 3E-3533**


**HOLE NUMBER: DH-2-5**

**DATE MEASURED: 11/25/75**

| <b>DEPTH<br/>METERS</b> | <b>DEPTH<br/>FEET</b> | <b>TEMPERATURE<br/>DEG C</b> | <b>TEMPERATURE<br/>DEG F</b> | <b>GEO THERMAL GRADIENT<br/>DEG C/KM</b> | <b>DEG F/100 FT</b> |
|-------------------------|-----------------------|------------------------------|------------------------------|--|---------------------|
| 5.0                     | 16.4                  | 13.490                       | 56.028                       | .0                                       | .0                  |
| 10.0                    | 32.8                  | 11.490                       | 52.68                        | -400.0                                   | -22.0               |
| 15.0                    | 49.2                  | 11.270                       | 52.09                        | -44.0                                    | -2.4                |
| 20.0                    | 65.6                  | 11.200                       | 52.16                        | -14.0                                    | -0.8                |
| 25.0                    | 82.0                  | 11.050                       | 51.89                        | -30.0                                    | -1.6                |
| 30.0                    | 98.4                  | 10.890                       | 51.60                        | -32.0                                    | -1.8                |
| 35.0                    | 114.8                 | 10.740                       | 51.33                        | -30.0                                    | -1.6                |
| 40.0                    | 131.2                 | 10.610                       | 51.10                        | -26.0                                    | -1.4                |
| 45.0                    | 147.6                 | 10.480                       | 50.86                        | -26.0                                    | -1.4                |
| 50.0                    | 164.0                 | 10.420                       | 50.76                        | -12.0                                    | -0.7                |
| 55.0                    | 180.4                 | 10.370                       | 50.57                        | -10.0                                    | -0.5                |
| 60.0                    | 196.8                 | 10.340                       | 50.61                        | -6.0                                     | -0.3                |
| 65.0                    | 213.2                 | 10.370                       | 50.67                        | 6.0                                      | .3                  |
| 70.0                    | 229.6                 | 10.390                       | 50.70                        | 4.0                                      | .2                  |
| 75.0                    | 246.0                 | 10.430                       | 50.77                        | 8.0                                      | .4                  |
| 79.0                    | 259.1                 | 10.450                       | 50.81                        | 5.0                                      | .3                  |

TEMPERATURE, DEG. C

8      9      10      11      12      13      14

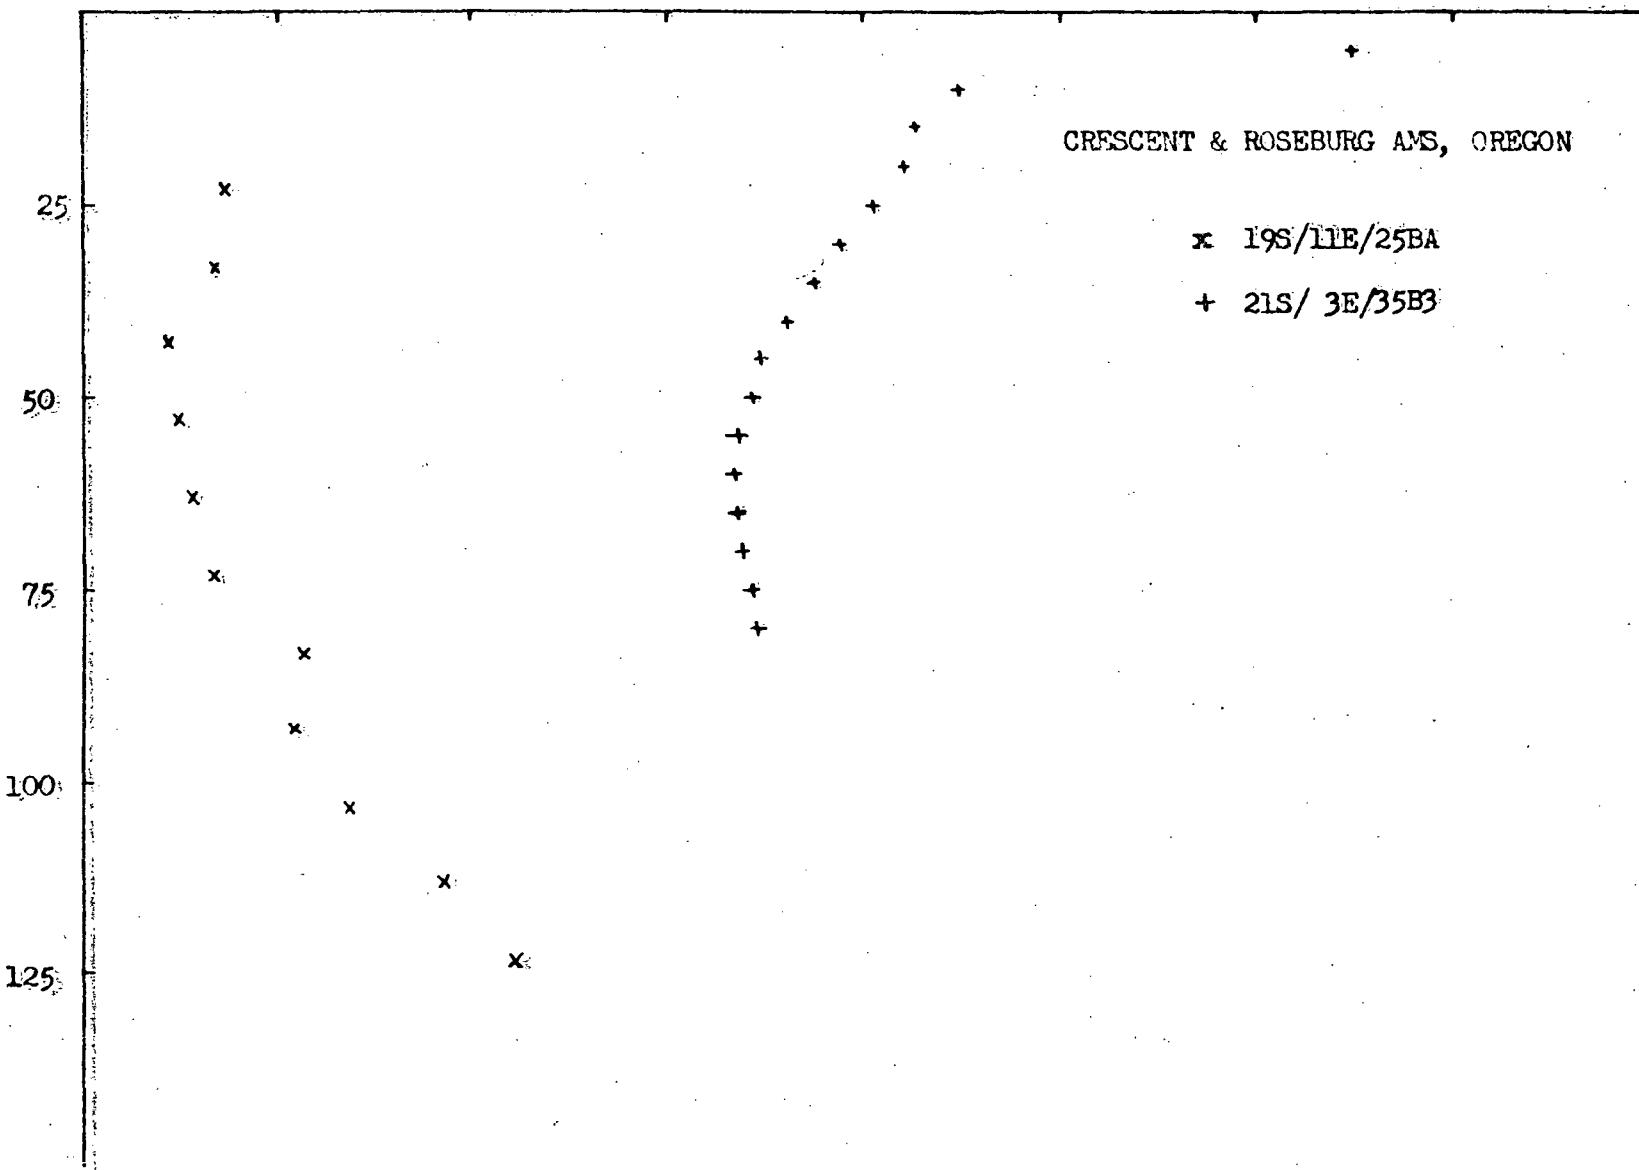

D E P T H  
M B T E R S

50

25

50

75

100

125

LOCATION: ROSEBURG AMS, OREGON  
22S/ 3E-10CD  
HOLE NAME: PCCPG-WW  
DATE MEASURED: 6/28/78

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 20.0            | 65.6          | 11.140      | 52.05 | 0.0                 | 0.0          |
| 25.0            | 82.0          | 11.410      | 52.54 | 54.0                | 3.0          |
| 30.0            | 98.4          | 11.540      | 52.77 | 26.0                | 1.4          |
| 35.0            | 114.8         | 11.710      | 53.08 | 34.0                | 1.9          |
| 40.0            | 131.2         | 11.890      | 53.40 | 36.0                | 2.0          |
| 45.0            | 147.6         | 12.040      | 53.67 | 30.0                | 1.6          |
| 50.0            | 164.0         | 12.190      | 53.94 | 30.0                | 1.6          |
| 55.0            | 180.4         | 12.520      | 54.54 | 66.0                | 3.6          |
| 60.0            | 196.8         | 12.670      | 54.81 | 30.0                | 1.6          |
| 65.0            | 213.2         | 12.870      | 55.17 | 40.0                | 2.1          |
| 70.0            | 229.6         | 13.060      | 55.51 | 38.0                | 2.1          |
| 75.0            | 246.0         | 13.280      | 55.90 | 44.0                | 2.4          |
| 80.0            | 262.4         | 13.490      | 56.28 | 42.0                | 2.3          |
| 85.0            | 278.8         | 13.690      | 56.64 | 40.0                | 2.3          |
| 90.0            | 295.2         | 13.890      | 57.00 | 40.0                | 2.3          |
| 92.0            | 301.8         | 13.980      | 57.16 | 45.0                | 2.5          |

TEMPERATURE, DEG C

109

0.5

10

15

PCCPG-WW


22S/ 3E-10CD  
6/28/78

50

DEPTH IN METERS

100

150

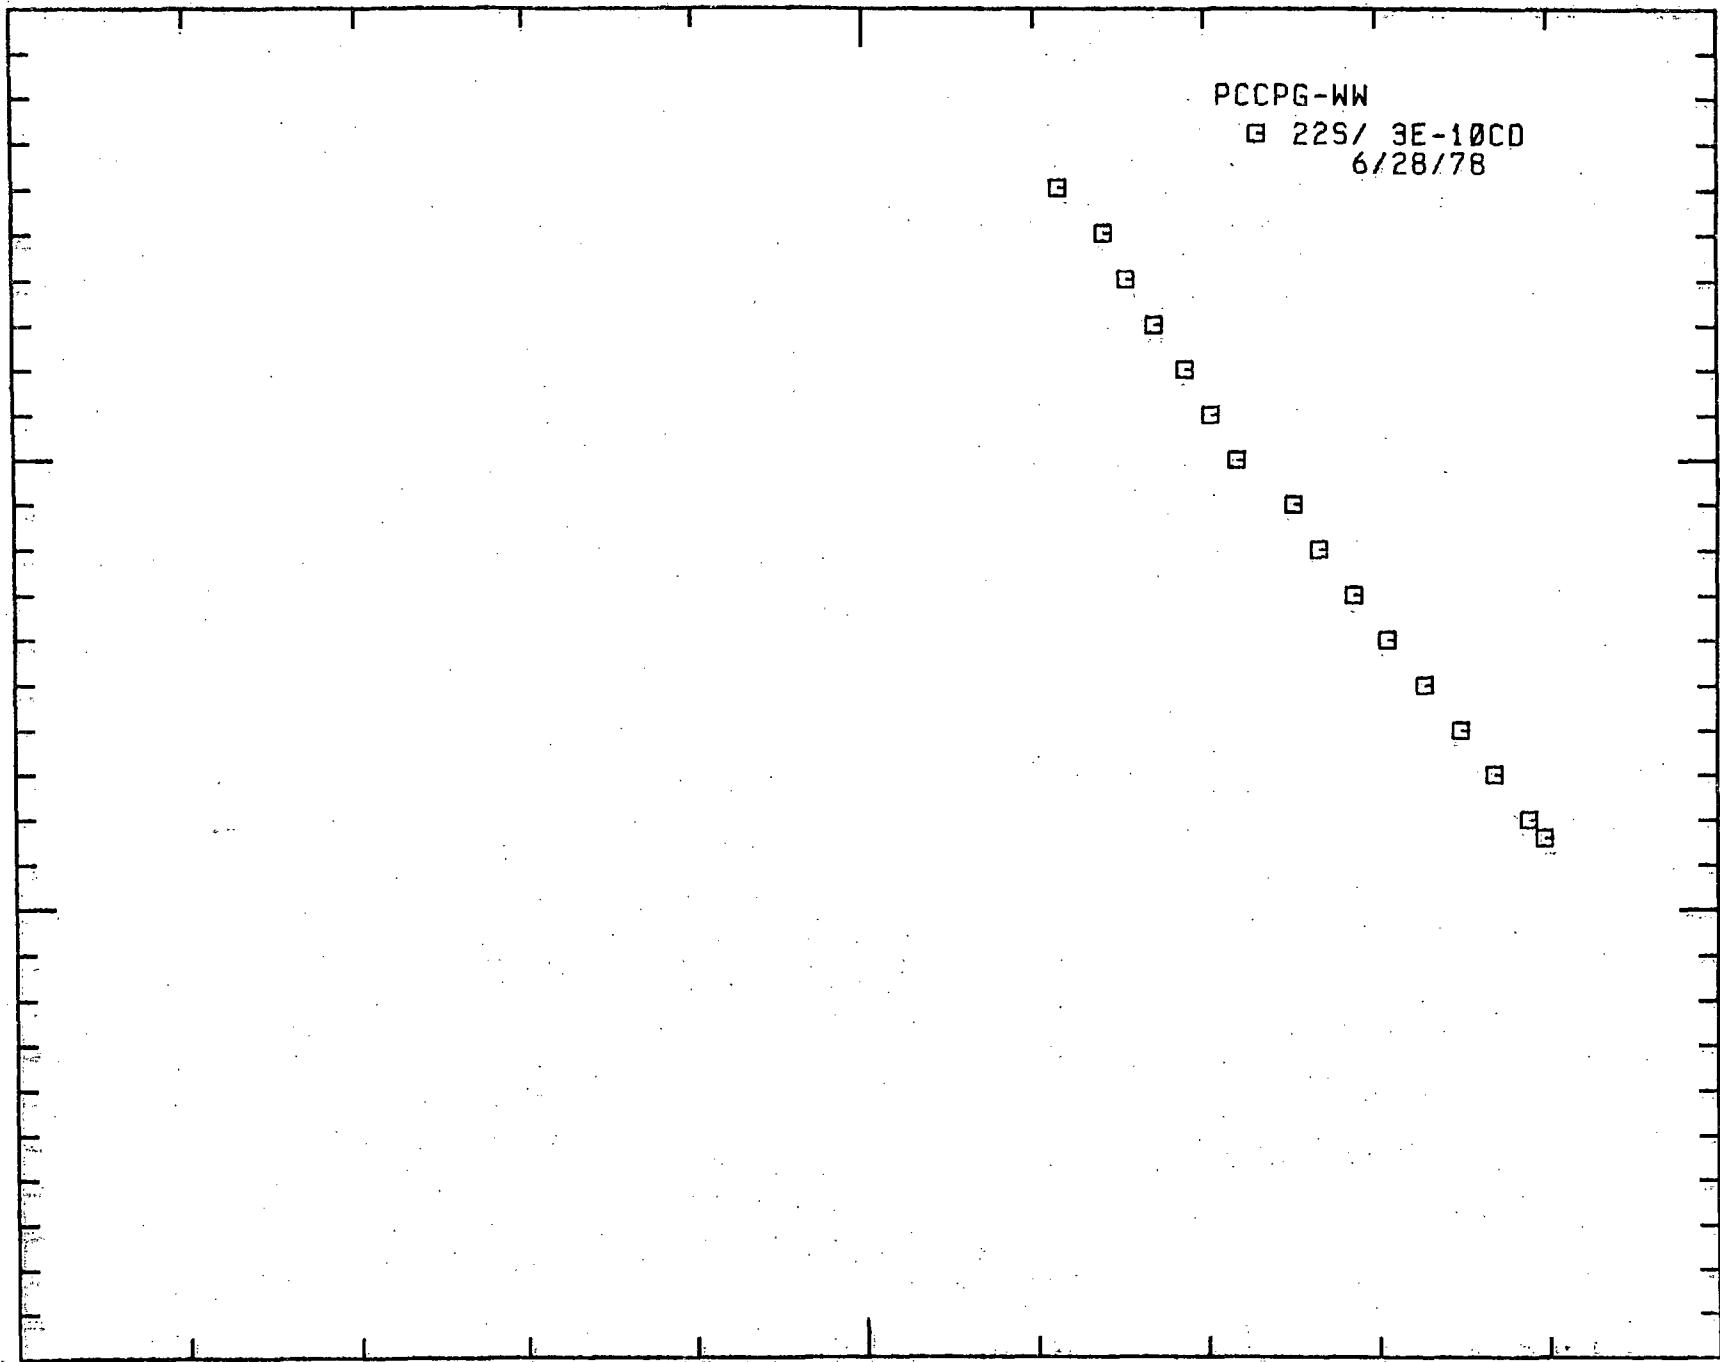

22S/ 5E/26BC

HOLE NUMBER: CR-MCHSW  
DATE MEASURED: 9/29/76

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE<br>DEG C | TEMPERATURE<br>DEG F | GEOThERMAL GRADIENT<br>DEG C/KM | GEOThERMAL GRADIENT<br>DEG F/100 FT |
|-----------------|---------------|----------------------|----------------------|---------------------------------|-------------------------------------|
| 10.0            | 32.8          | 8.340                | 47.01                | .0                              | .0                                  |
| 15.0            | 49.2          | 8.560                | 47.41                | 44.0                            | 2.4                                 |
| 20.0            | 65.6          | 8.630                | 47.53                | 14.0                            | .8                                  |
| 25.0            | 82.0          | 8.770                | 47.79                | 28.0                            | 1.5                                 |
| 30.0            | 98.4          | 8.960                | 48.13                | 38.0                            | 2.1                                 |
| 35.0            | 114.8         | 9.150                | 48.47                | 38.0                            | 2.1                                 |
| 40.0            | 131.2         | 9.410                | 48.94                | 52.0                            | 2.9                                 |
| 45.0            | 147.6         | 9.730                | 49.51                | 64.0                            | 3.5                                 |
| 50.0            | 164.0         | 9.990                | 49.98                | 52.0                            | 2.9                                 |
| 55.0            | 180.4         | 10.110               | 50.20                | 24.0                            | 1.3                                 |
| 60.0            | 196.8         | 10.410               | 50.74                | 60.0                            | 3.3                                 |
| 65.0            | 213.2         | 10.670               | 51.21                | 52.0                            | 2.9                                 |
| 70.0            | 229.6         | 10.960               | 51.73                | 58.0                            | 3.2                                 |
| 75.0            | 246.0         | 11.230               | 52.21                | 54.0                            | 3.0                                 |
| 80.0            | 262.4         | 11.460               | 52.63                | 46.0                            | 2.5                                 |
| 85.0            | 278.8         | 11.750               | 53.15                | 58.0                            | 3.2                                 |
| 90.0            | 295.2         | 12.020               | 53.64                | 54.0                            | 3.0                                 |
| 95.0            | 311.6         | 12.340               | 54.21                | 64.0                            | 3.5                                 |
| 100.0           | 328.0         | 12.620               | 54.72                | 56.0                            | 3.1                                 |
| 105.0           | 344.4         | 13.070               | 55.53                | 90.0                            | 4.9                                 |
| 110.0           | 360.8         | 13.180               | 55.72                | 22.0                            | 1.2                                 |
| 115.0           | 377.2         | 13.460               | 56.23                | 56.0                            | 3.1                                 |
| 120.0           | 393.6         | 13.740               | 56.73                | 56.0                            | 3.1                                 |
| 125.0           | 410.0         | 14.040               | 57.27                | 60.0                            | 3.3                                 |
| 130.0           | 426.4         | 14.240               | 57.63                | 40.0                            | 2.2                                 |
| 135.0           | 442.8         | 14.570               | 58.23                | 66.0                            | 3.6                                 |
| 140.0           | 459.2         | 14.780               | 58.60                | 42.0                            | 2.3                                 |
| 145.0           | 475.6         | 15.040               | 59.07                | 52.0                            | 2.9                                 |
| 150.0           | 492.0         | 15.320               | 59.58                | 56.0                            | 3.1                                 |

## TEMPERATURE, DEG C


25.0

15.0

ROSEBURG AMS, OREGON

+ 21S/4E/28AD  
9/23/76X 22S/5E/26BC  
9/29/76

CLOUDS - 0 25% 50% 75% 100%

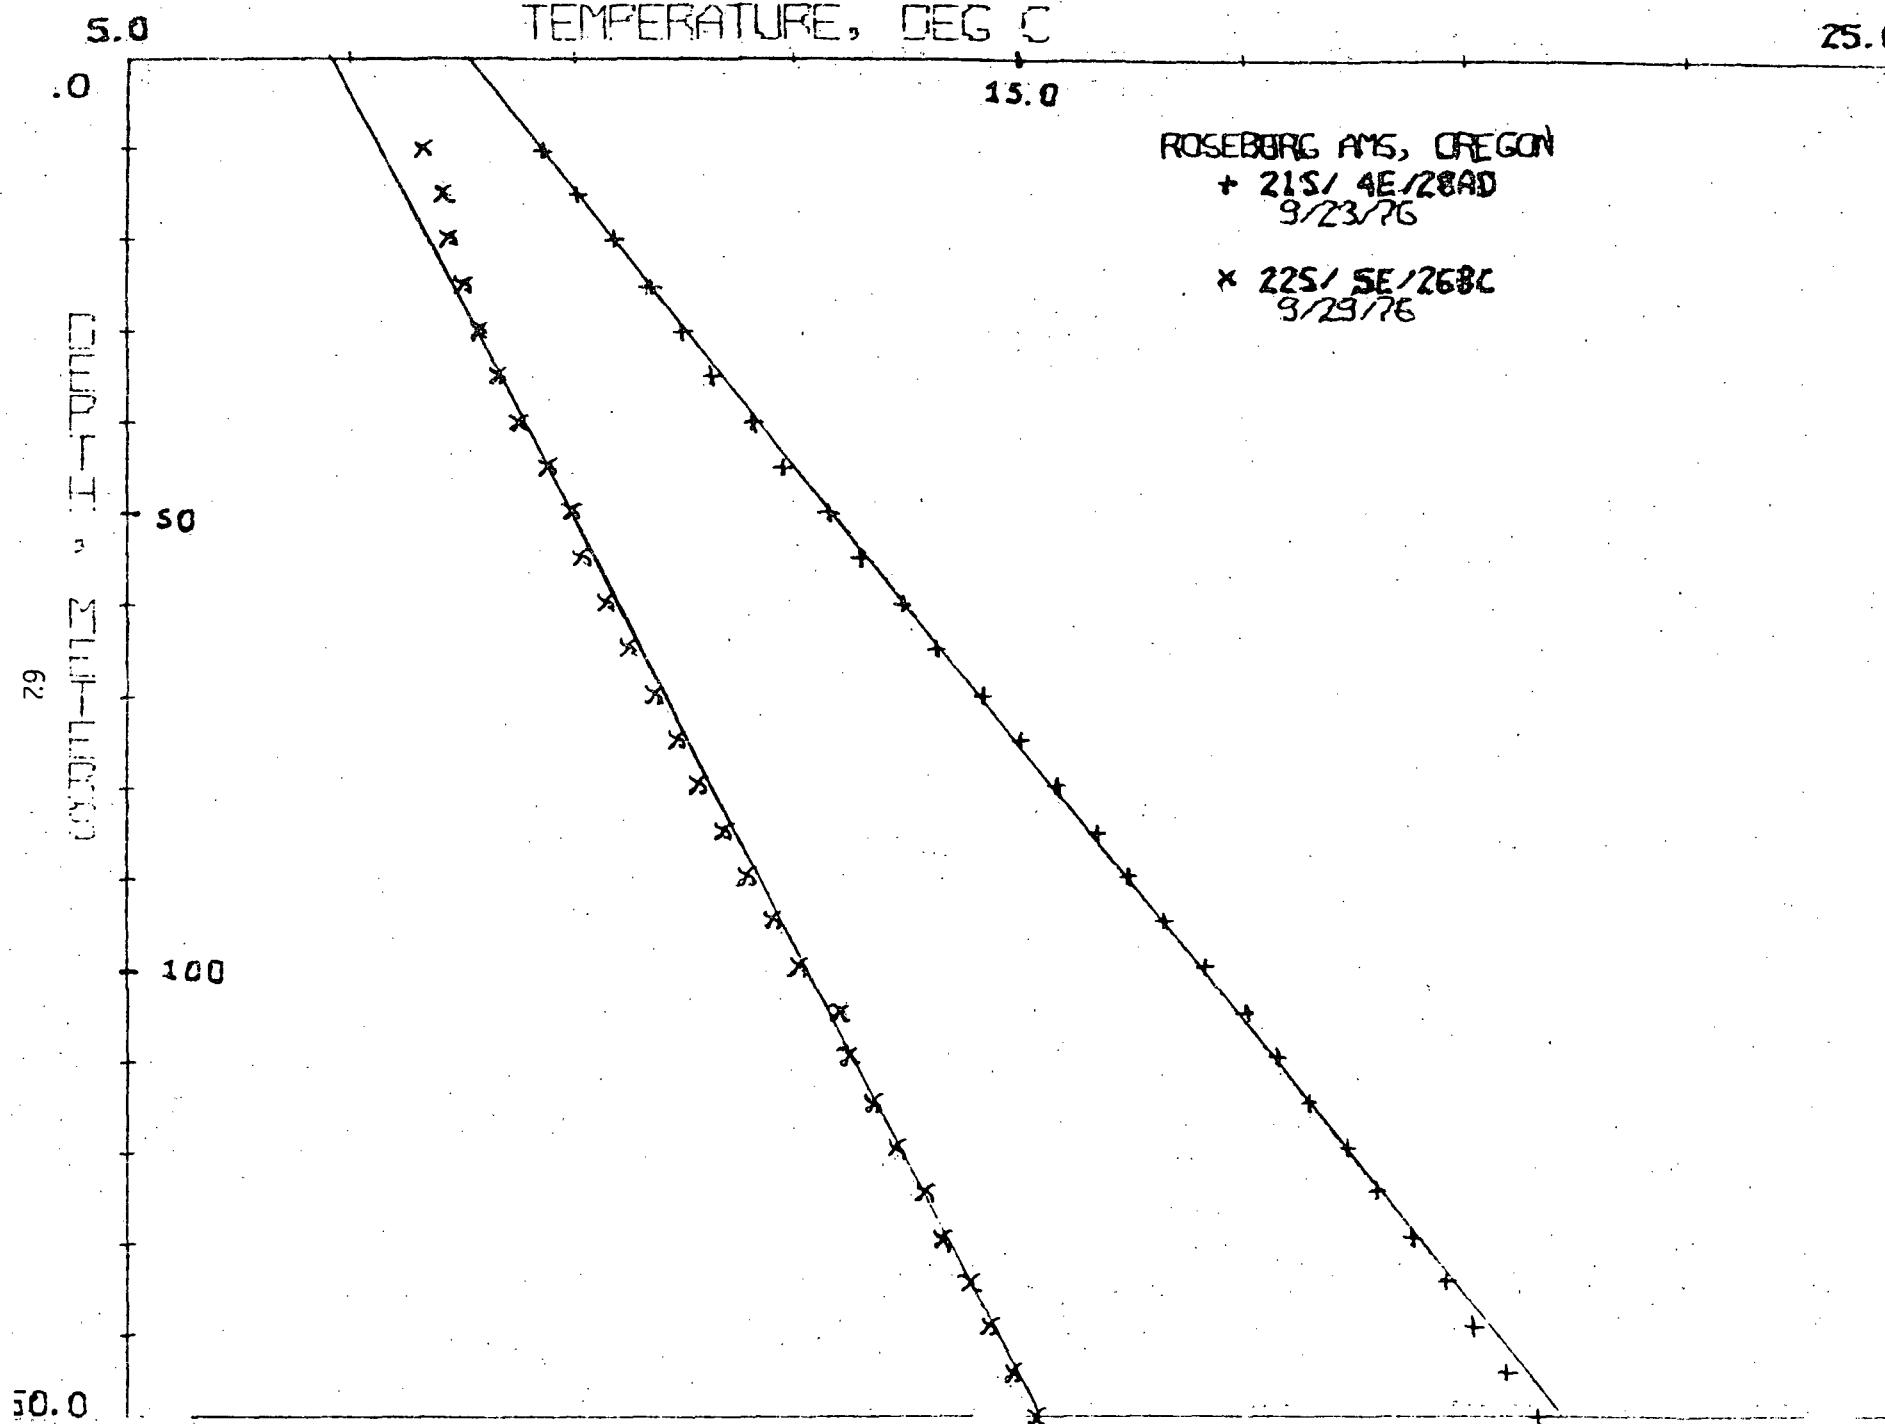

LOCATION: ROSEBURG AMS, OREGON  
 23S/ SE- 8DAA  
 HOLE NAME: PNTO CRK  
 DATE MEASURED: 9/ 9/80

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEO THERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|----------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM             | DEG F/100 FT |
| 34.0            | 111.5         | 6.710       | 44.08 | 0.0                  | 0.0          |
| 36.0            | 118.1         | 6.670       | 44.01 | -20.0                | -1.1         |
| 38.0            | 124.6         | 6.680       | 44.02 | 5.0                  | 0.3          |
| 40.0            | 131.2         | 6.720       | 44.10 | 20.0                 | 1.1          |
| 42.0            | 137.8         | 6.770       | 44.19 | 25.0                 | 1.4          |
| 44.0            | 144.3         | 6.850       | 44.33 | 40.0                 | 2.2          |
| 46.0            | 150.9         | 6.960       | 44.53 | 55.0                 | 3.0          |
| 48.0            | 157.4         | 7.060       | 44.71 | 50.0                 | 2.7          |
| 50.0            | 164.0         | 7.270       | 45.09 | 105.0                | 5.0          |
| 52.0            | 170.6         | 7.490       | 45.40 | 110.0                | 6.0          |
| 54.0            | 177.1         | 7.730       | 45.91 | 120.0                | 6.6          |
| 56.0            | 183.7         | 7.980       | 46.36 | 125.0                | 6.9          |
| 58.0            | 190.2         | 8.220       | 46.80 | 120.0                | 6.6          |
| 60.0            | 196.8         | 8.380       | 47.08 | 80.0                 | 4.4          |
| 62.0            | 203.4         | 8.570       | 47.43 | 95.0                 | 5.2          |
| 64.0            | 209.9         | 8.770       | 47.79 | 100.0                | 5.5          |
| 66.0            | 216.5         | 8.970       | 48.15 | 100.0                | 5.5          |
| 68.0            | 223.0         | 9.180       | 48.52 | 105.0                | 5.8          |
| 70.0            | 229.6         | 9.320       | 48.78 | 70.0                 | 3.8          |
| 72.0            | 236.2         | 9.450       | 49.01 | 65.0                 | 3.6          |
| 74.0            | 242.7         | 9.610       | 49.30 | 80.0                 | 4.4          |
| 76.0            | 249.3         | 9.790       | 49.62 | 90.0                 | 4.9          |
| 78.0            | 255.8         | 9.970       | 49.95 | 90.0                 | 4.9          |
| 80.0            | 262.4         | 10.120      | 50.22 | 75.0                 | 4.1          |
| 82.0            | 269.0         | 10.320      | 50.58 | 100.0                | 5.5          |
| 84.0            | 275.5         | 10.510      | 50.92 | 95.0                 | 5.2          |
| 86.0            | 282.1         | 10.730      | 51.31 | 110.0                | 6.0          |
| 88.0            | 288.6         | 10.940      | 51.69 | 105.0                | 5.8          |
| 90.0            | 295.2         | 11.320      | 52.38 | 190.0                | 10.4         |
| 92.0            | 301.8         | 11.430      | 52.57 | 55.0                 | 3.0          |
| 94.0            | 308.3         | 11.510      | 52.72 | 40.0                 | 2.2          |
| 96.0            | 314.9         | 11.680      | 53.02 | 85.0                 | 4.3          |
| 98.0            | 321.4         | 11.820      | 53.28 | 70.0                 | 3.8          |
| 100.0           | 328.0         | 11.980      | 53.56 | 80.0                 | 4.4          |
| 102.0           | 334.6         | 12.140      | 53.85 | 80.0                 | 4.4          |
| 104.0           | 341.1         | 12.310      | 54.16 | 85.0                 | 4.7          |
| 106.0           | 347.7         | 12.470      | 54.45 | 80.0                 | 4.4          |
| 108.0           | 354.2         | 12.620      | 54.72 | 75.0                 | 4.1          |
| 110.0           | 360.8         | 12.810      | 55.06 | 95.0                 | 5.2          |
| 112.0           | 367.4         | 12.950      | 55.31 | 70.0                 | 3.8          |
| 114.0           | 373.9         | 13.080      | 55.54 | 65.0                 | 3.6          |

LOCATION: ROSEBURG AMS, OREGON  
23S/ SE- 8DAA  
HOLE NAME: PNTD CRK  
DATE MEASURED: 9/ 9/80

PAGE 2

| DEPTH<br>METERS | DEPTH<br>FEET | TEMPERATURE |       | GEOTHERMAL GRADIENT |              |
|-----------------|---------------|-------------|-------|---------------------|--------------|
|                 |               | DEG C       | DEG F | DEG C/KM            | DEG F/100 FT |
| 116.0           | 380.5         | 13.390      | 56.10 | 155.0               | 8.5          |
| 118.0           | 387.0         | 13.520      | 56.34 | 65.0                | 3.6          |
| 120.0           | 393.6         | 13.610      | 56.50 | 45.0                | 2.5          |
| 122.0           | 400.2         | 13.770      | 56.79 | 80.0                | 4.4          |
| 124.0           | 406.7         | 13.890      | 57.00 | 60.0                | 3.3          |
| 126.0           | 413.3         | 14.000      | 57.20 | 55.0                | 3.0          |
| 128.0           | 419.8         | 14.110      | 57.40 | 55.0                | 3.0          |
| 130.0           | 426.4         | 14.200      | 57.56 | 45.0                | 2.5          |
| 132.0           | 433.0         | 14.350      | 57.83 | 75.0                | 4.1          |
| 134.0           | 439.5         | 14.450      | 58.01 | 50.0                | 2.7          |
| 136.0           | 446.1         | 14.640      | 58.35 | 95.0                | 5.2          |
| 138.0           | 452.6         | 14.790      | 58.62 | 75.0                | 4.1          |
| 140.0           | 459.2         | 14.910      | 58.84 | 60.0                | 3.3          |
| 142.0           | 465.8         | 15.150      | 59.27 | 120.0               | 6.6          |
| 144.0           | 472.3         | 15.310      | 59.56 | 80.0                | 4.4          |
| 146.0           | 478.9         | 15.490      | 59.88 | 90.0                | 4.9          |
| 148.0           | 485.4         | 15.650      | 60.17 | 80.0                | 4.4          |
| 150.0           | 492.0         | 15.790      | 60.42 | 70.0                | 3.8          |
| 152.0           | 498.6         | 15.900      | 60.62 | 55.0                | 3.0          |

TEMPERATURE, DEG C

