

GL02971-59

T.D
5057'
5057'

5000'

64
00

5700'

4800'

4700'

4600'

4500'

4400'

4300'

4200'

4200'

4000'

4000'

3900'

3800'

3700'

3600'

3500'

A TRCKER
STINGER

1500'

3000'

2500


2000

1500'

CAL CHECK

1000'

500'

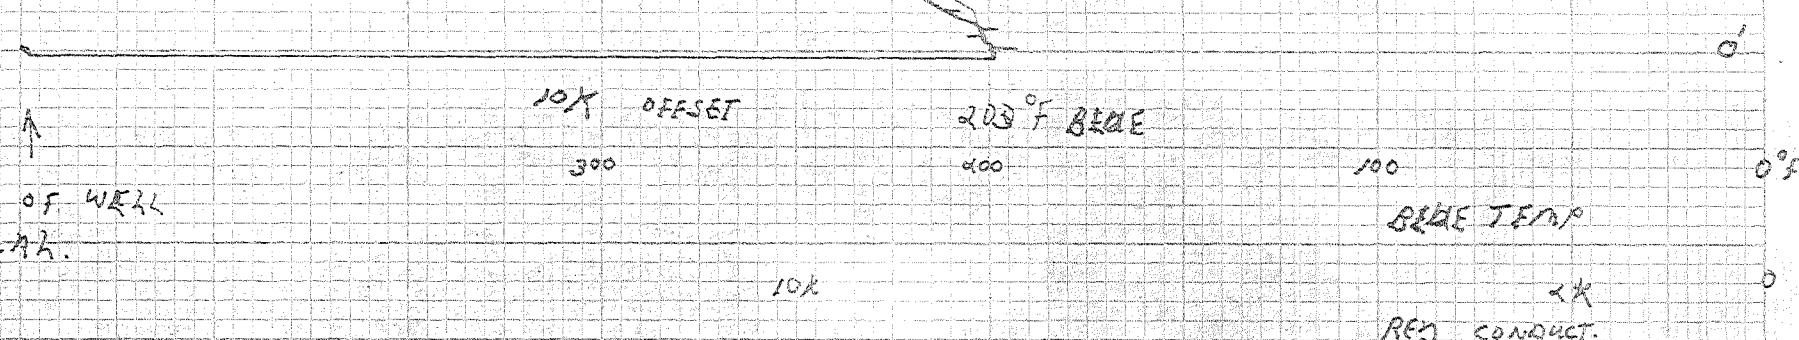

OUT OF WELL
CAR.

200

10K OFFSET

300

203°F BBL

400

100

0°F

BBL TEMP

2K

RES CONDUCT.

100' INDICATED = 98.46' ACTUAL

PRGP # 1

CONDUCTIVITY / TEMP LOG

RATE FT/min = 25

NOT
2

9-21-82 2000