

GLD2971-9

R STINGER
PACKER

3600'

3700'

3800'

→ 285°F


3900'

4000'

4100'

4200'

4300'

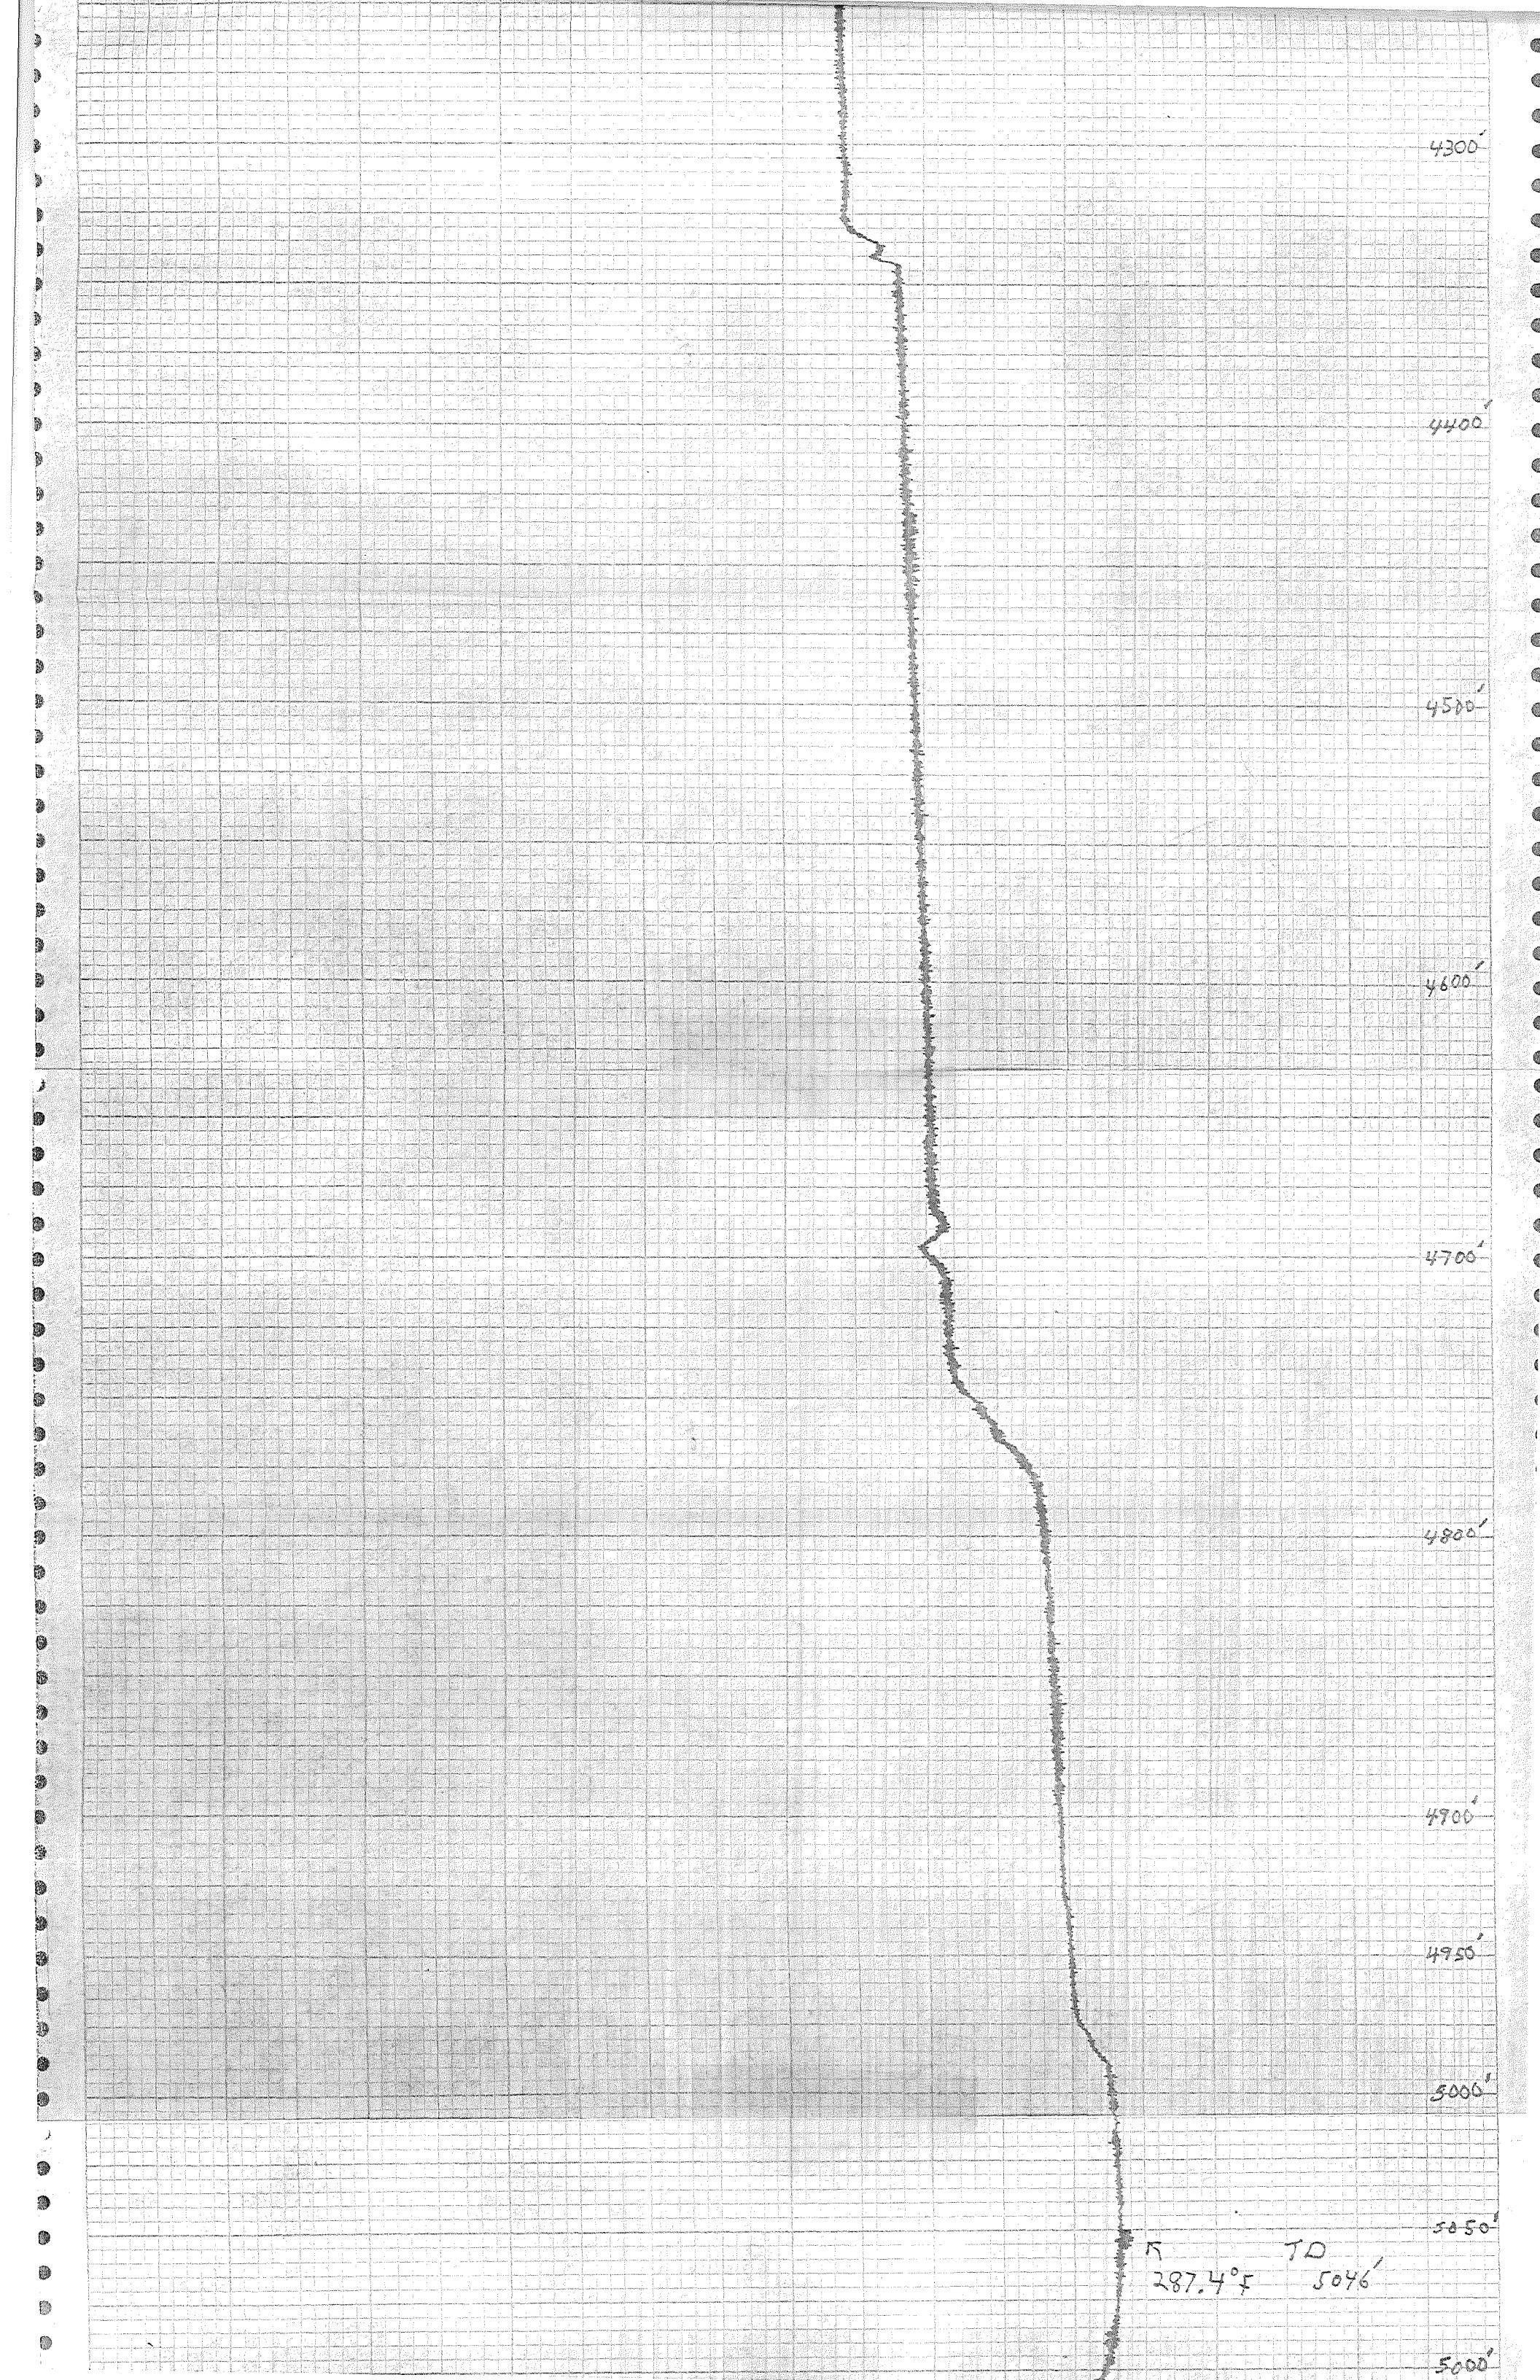

4300'

4400'

4500'

4600'

4700'

4800'

4900'

4950'

5000'

5050'

R 287.4°f TD 5046'

5000'

5000

5050'

R 287.4°F TD 5046'

5000'

4900'

4800'

4700'

4600'

4500'

4400'

4300'

4300'

4200'

4100'

4000'

3900'

3800'

3750'

3700'

3600'

3500'

290°F

↖ PACKER
STINGER

284.7°F

280°F

"PACIFIC
STINGER

280° F

284.7° F

3500'
290° F

3000'

2500

2000

2000

1500

100'

500'

280° F

200°F

277.5

300°F

100' INDICATED = 98.46' ACTUAL

BRGP # 1

9-17-82

13:00

TEST 1A BASE 6.10

SCALE 0-100°F / 0-10°F

TEMPERATURE LOG
WELL IS FLOWING

1°F = 1mV

RATE FT/min = 20

Sont
D