GO WIRELINE SERVICES GEARHART-OWEN

INDUCTION ELECTRICAL LOG

FILING NO.

COMPANY C&R Corporation/ZERO

WELL CGEH #2

FIELD China Lake NWC

COUNTY Inyo STATE California

LOCATION: SEC 6 TWP 22S RGE 39E

Other Services: 72 mph Log X-Y Caliper

Permanent Datum GL Elev. 4338.5

Log Measured From KB 2.46 Ft. Above Permanent Datum

Drilling Measured From KB Elevations: KB 4372 DF GL 4338.5

Run No.	ONE		
Date	10-3-77		
Depth—Driller	13950		
Depth—Logger	13948		
Bottom Logged Interval	13948		
Top Logged Interval	1371		
Casing—Driller	9 5/8 @ 3418	@	
Casing—Logger	9 5/8 @ 3419	@	
Bit Size	8 3/4"		
Type Fluid in Hole	GEL-Chemical		
Density and Viscosity	9.7 - 45		
pH and Fluid Loss	9.5 - cc		
Source of Sample	Flowline		
Rm @ Meas. Temp.	2.78 @ 70 °F	@ °F	
Rmf @ Meas. Temp.	2.28 @ 70 °F	@ °F	
Rmc @ Meas. Temp.	3.38 @ 70 °F	@ °F	
Source of Rmf and Rmc	MEAS MEAS		
Rm @ BHT	1.85 @ 205 °F	@ °F	
Time Since Circ.	24 HRS		
Max. Rec. Temp.	205 °F		
Equip. No. and Location	2211 LBAK		
Recorded By	WHITE-WILK		
Witnessed By	MR FOELK		

FOLD HERE

Changes in Mud Type or Additional Samples

Date	Sample No.						
Depth-Driller							
Type Fluid in Hole							
Dens.	Visc.						
pH	Fluid Loss	cc		cc			
Source of Sample							
Rm @ Meas. Temp.		@ °F		@ °F			
Rmf @ Meas. Temp.		@ °F		@ °F			
Rmc @ Meas. Temp.		@ °F		@ °F			
Source Rmf Rmc							
Rm @ BHT	.85 @ 205 °F		@ °F				
Rmf @ BHT	.70 @ 205 °F		@ °F				
Rmc @ BHT	.85 @ 205 °F		@ °F				

Remarks:

Scale Changes

Type Log	Depth	Scale Up Hole	Scale Down Hole

Equipment Data

Run No.	Tool Type	Tool Position	S. O.	Tool No.	Elec. No.	Panel No.	Other
ONE	6FF40	FREE	-	5-40	5-40	DDL	

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m²/m	CONDUCTIVITY 1000 millimhos/m = ohms m²/m
10		16" NORMAL AMP. NORMAL 0 — 100 / 0 — 1000	40" INDUCTION 500 — 0
		40" INDUCTION 0 — 100 / 0 — 1000	

FORM 1004

CALIBRATION AFTER SURVEY

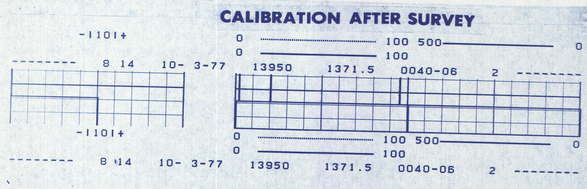

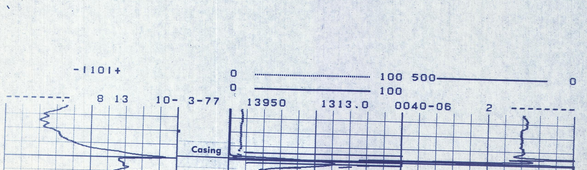

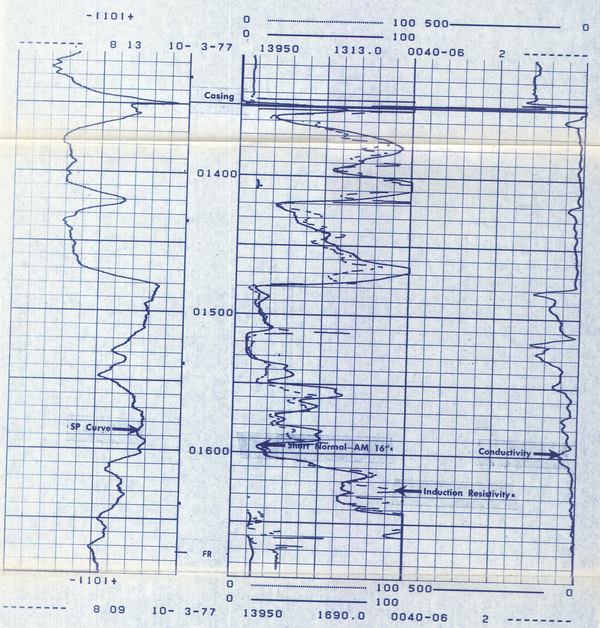

REPEAT SECTION

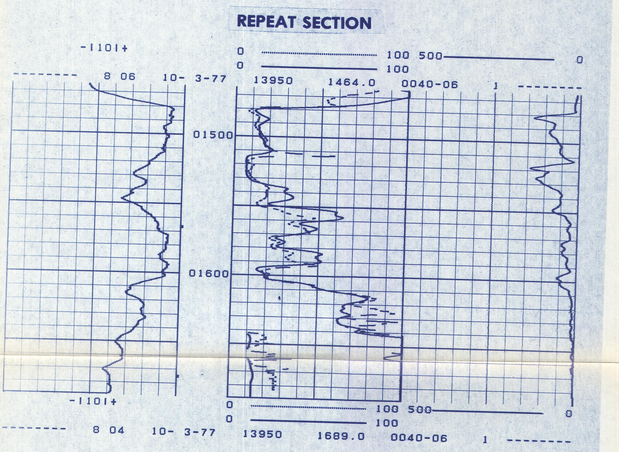

CALIBRATION BEFORE SURVEY

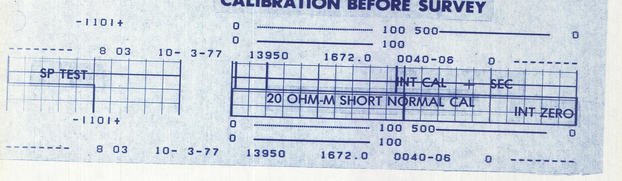

G03208 84 of 104