


AGNEW and SWEET

24 HOUR PHONE 805-327-2267
3914 GILMORE AVENUE
BAKERSFIELD, CALIFORNIA
93308

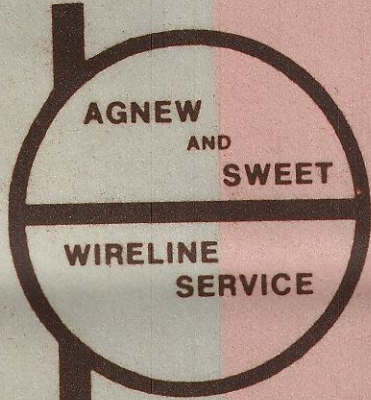

SUBSURFACE SURVEY


OWNER CHEVRON RESOURCES COMPANY FIELD BEOWAVE WELL NAME 85 - 18
CASING: 13-3/8" @ 1006' ELEV. DATE: April 21, 1980
LINER DESCRIPTION: 9-5/8" @ 2937' , Top @ 794' ZERO POINT D.F.
PERFORATIONS: MPP
TUBING DETAIL: DEPTH 3260' I.D. ZONE

WELL STATUS Static PUMP SHOE ON PRODUCTION
SURVEYED TUB. ANN Casing (X) SHUT IN
ENGAGE STYLUS 9:44 pm
DISENGAGE STYLUS 12:08 am
PICK UP @ none made TIME ON BOTTOM 11:22 pm
TIME OFF BOTTOM 11:32 pm
CLOCK 3 hr. TURN 15
ELEMENT RANGE *80-624, 127-586 SERIAL NO. *10287, 10030
MAX. °F 245.0 @ 2935'
PURPOSE STATIC TEMPERATURE TRAVERSE SURVEY
STABILIZATION PERIOD
REMARKS: Traverse @ 20' per minute from 1500' to 2935'.
RUN #4

PRESSURES:	START	FINISH
DATE		
CASING PSI OBS		
CASING PSI COR		
TUBING PSI OBS		
TUBING PSI COR		
PRESS STATUS		
INSTRUMENT HUNG @		

BY: SUNDBERG /kh

EARTH SCIENCE LABORATORY
University of Utah Research Institute
Salt Lake City, Utah

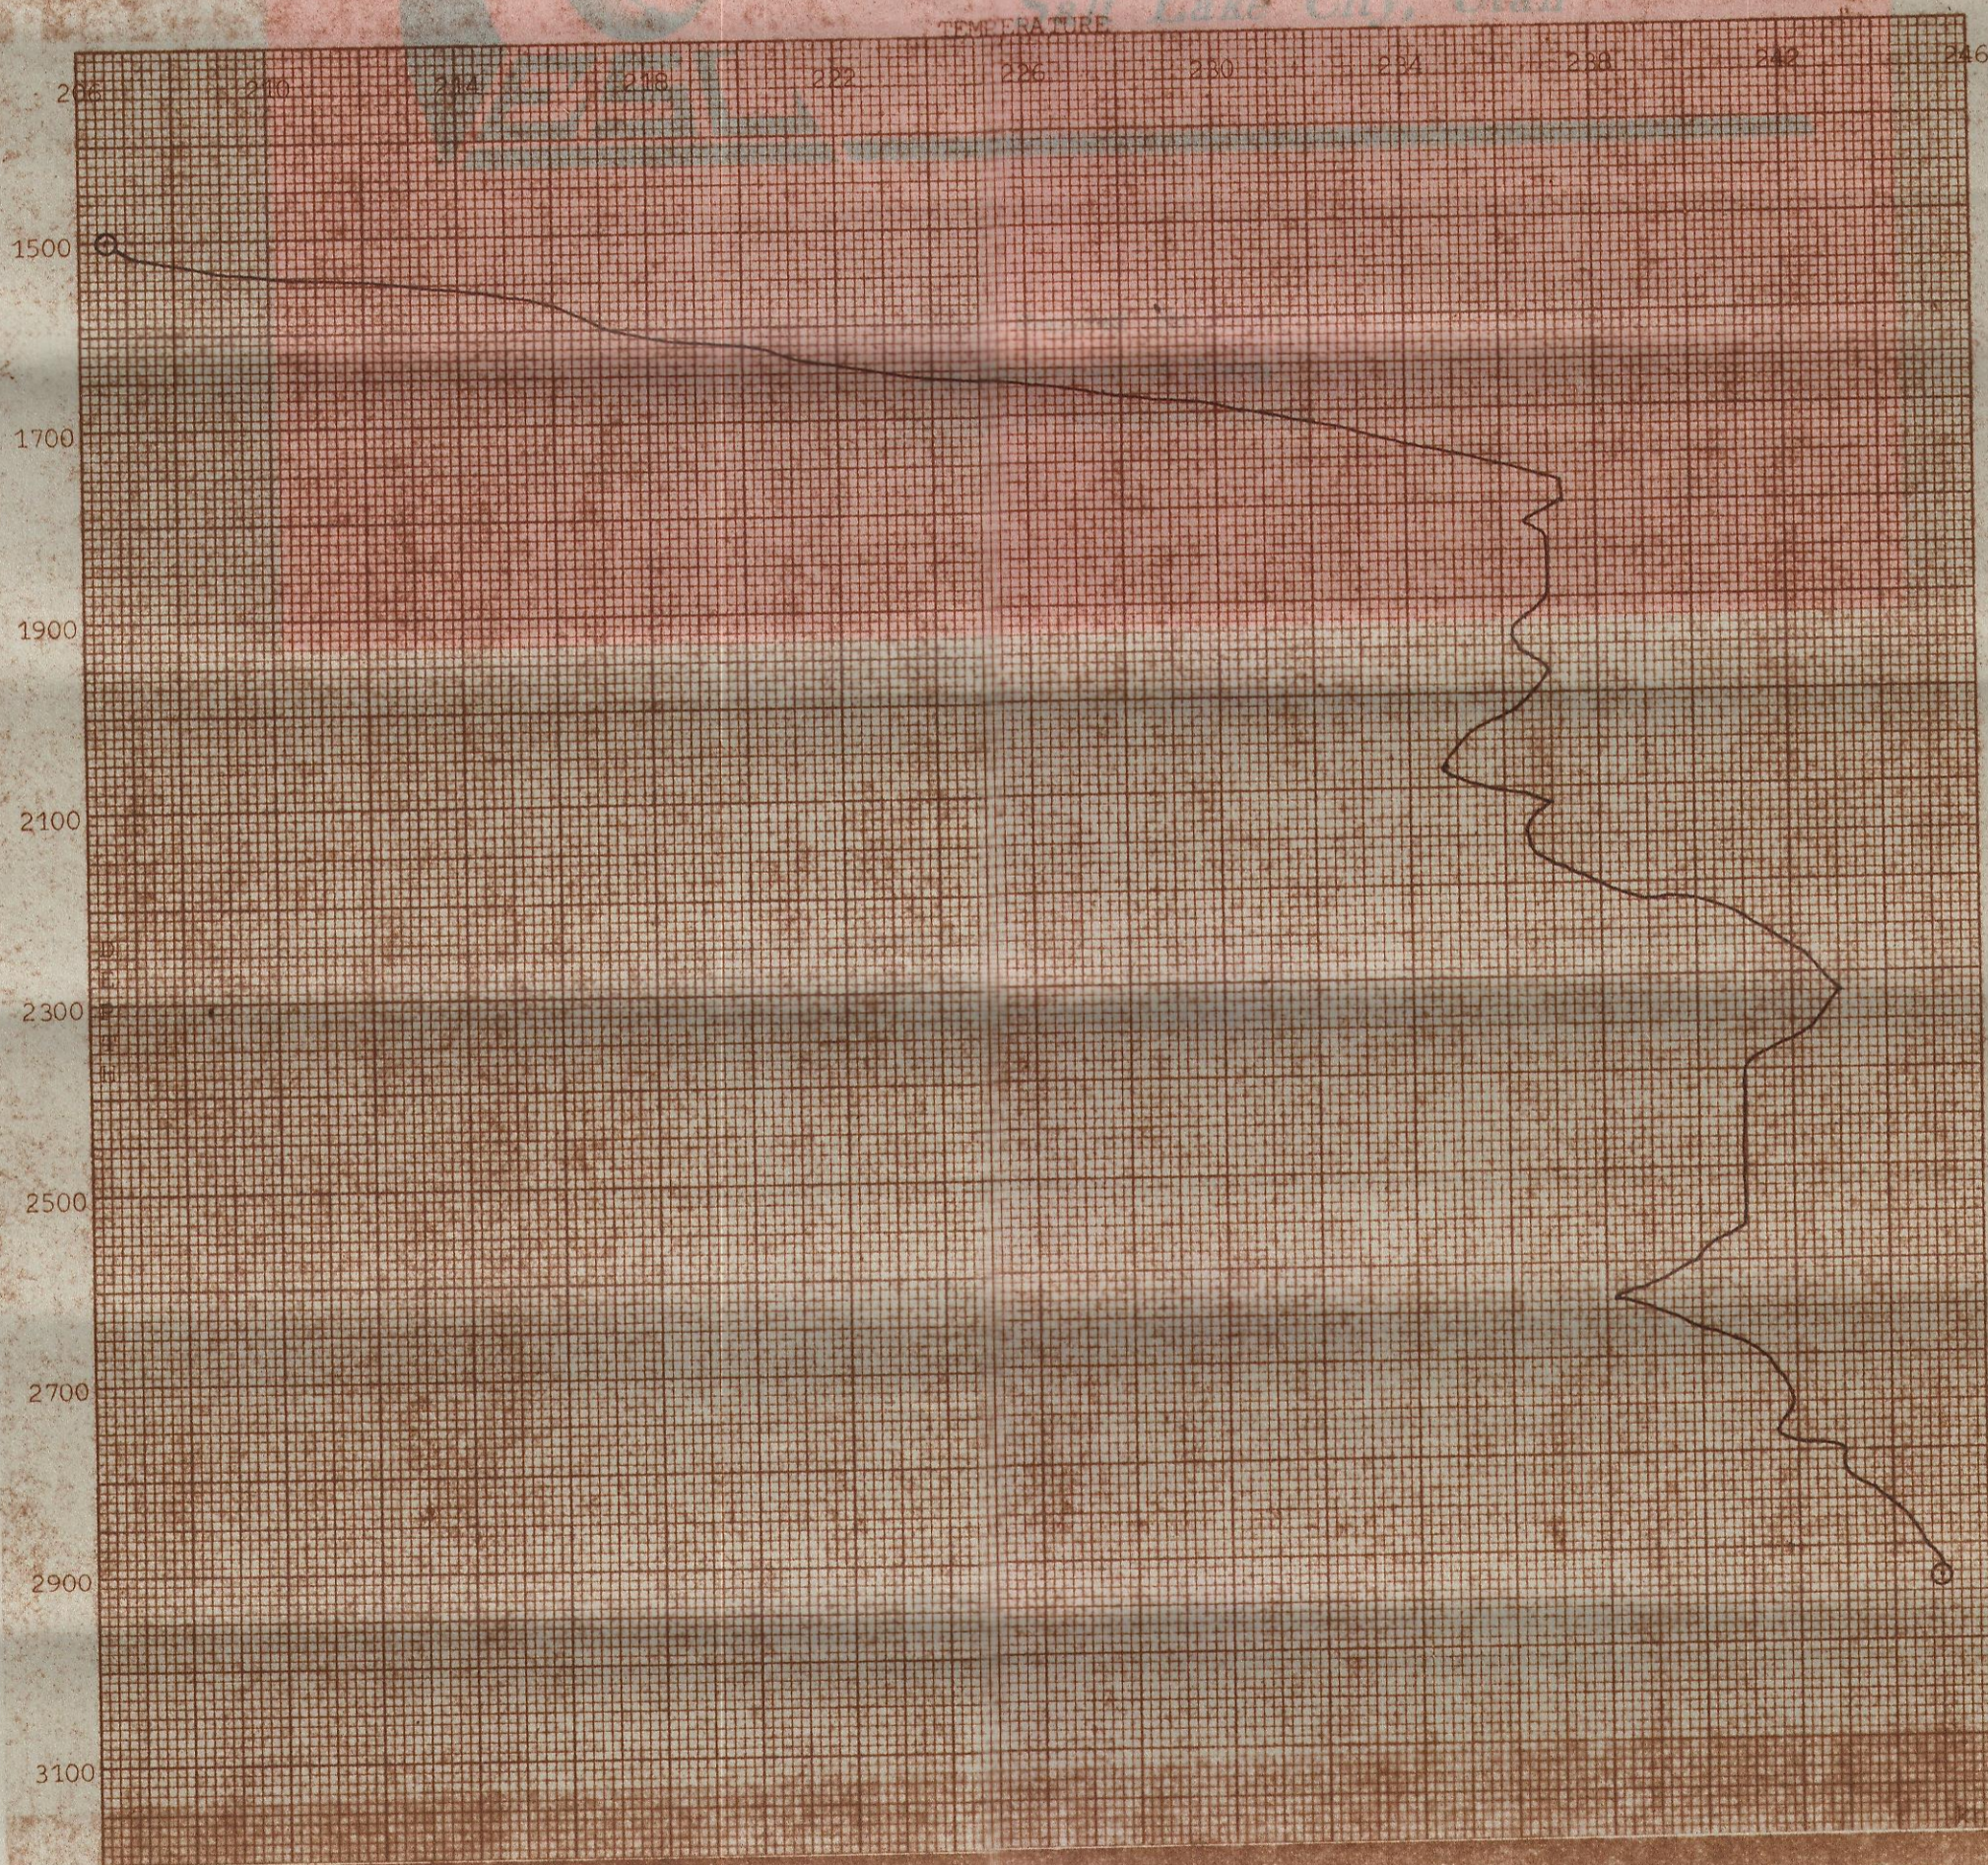

DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.
1500	206.6	1860	237.0	2220	239.3
1520	207.4	1880	237.0	2240	241.0
1540	210.0	1900	237.0	2260	241.6
1560	214.6	1920	236.5	2280	242.4
1580	216.3	1940	236.2	2300	242.7
1600	217.1	1960	236.5	2320	243.0
1620	220.0	1980	237.0	2340	242.7
1640	221.7	2000	236.7	2360	242.4
1660	224.8	2020	236.2	2380	241.6
1680	227.6	2040	235.3	2400	241.0
1700	230.5	2060	235.0	2420	241.0
1720	232.5	2080	234.7	2440	241.0
1740	233.9	2100	235.6	2460	241.0
1760	235.9	2120	237.0	2480	241.0
1780	237.3	2140	236.5	2500	241.0
1800	237.3	2160	236.5	2520	241.0
1820	236.5	2180	237.0	2540	241.0
1840	237.0	2200	237.9	2560	241.0
				2920	245.0
				2935	245.0