

## BACA PROJECT

DATA AND REPORTSGEOLOGY

No.	Transfer Date	Release Date	Title
1.	B	B	Hydrothermal Geology of the Valles Caldera, New Mexico by R.F. Dondanville - 1971.
2.	n	B	Airborne Infrared Geothermal Exploration--Valles Caldera, New Mexico Earth Resources Operations, North American Rockwell Corp.-1972.
3.	B	B	Electrical Resistivity Survey in Valles Caldera, New Mexico by Group Seven, Inc. - 1972.
4.	B	B	Additional Data--Electrical Resistivity Survey in the Valles Caldera, New Mexico by Group Seven, Inc. - 1972.
5.	B	B	Reconnaissance Resistivity Survey Baca Property, McPhar - 1973.
6.	B	B	Supplemental Report--Reconnaissance Resistivity and Schlumberger Depth Sounding Surveys Baca Property - McPhar - 1973.
7.	B	B	Quantitative Gravity Interpretation Valles Caldera Area, New Mexico by R.L. Segar - 1974.
8.	B	B	Mercury Soil Gas Survey Baca Prospect by Allied Geophysics Inc. - 1974.
9.	A	A	Mercury analysis - 1974 gradient holes.
10.	B	B	Geothermal Geology of the Redondo Creek Area Baca Location by T.R. Slodowski - 1976.
11.	B	B	Magnetotelluric--Telluric Profile Survey, Valles Caldera Prospect by Geonomics - 1976 as reprocessed by QEB Inc. - 1978.
12.	B	B	Geological Resume of the Valles Caldera by T.R. Slodowski - 1977.

A MAGNETOTELLURIC-TELLURIC PROFILE SURVEY  
OF THE VALLES CALDERA PROSPECT  
SANDOVAL COUNTY, NEW MEXICO

submitted to  
UNION OIL COMPANY

December, 1976

by  
Michael J. Wilt  
Alan Lattanner  
Tsvi Meidav

Project No. 76.118

GEONOMICS, INC.  
3165 Adeline Street  
Berkeley, California 94703

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
Description of the Prospect	1
Data Acquisition and Reduction	1
II. GEOLOGY AND GEOPHYSICS	4
Pertinent Features	4
Effect of the Geologic Structure on the Present Survey	5
III. TELLURIC PROFILE RESULTS	6
Profile A (Plate II)	6
Profile B (Plate III)	7
Profile C (Plate IV)	8
Profiles D and H (Plate V)	9
Profiles F and E (Plate VI)	10
Profile G (Plate VII)	11
IV. TELLURIC NOISE ANALYSIS	12
V. MAGNETOTELLURIC RESULTS	15
Model Curves	17
VI. TELLURIC-MAGNETOTELLURIC RESULTS	23
MT Profile B (Plate IX)	23
MT Profile D (Plate X)	24
MT Profile G (Plate XI)	24
VII. REFERENCES	26

LIST OF APPENDICES

	<u>Page</u>
APPENDIX I. FIELD DATA FOR MAGNETOTELLURIC SOUNDINGS	27
APPENDIX II. MAGNETOTELLURIC APPARENT RESISTIVITY CURVES	106
APPENDIX III. THE MAGNETOTELLURIC METHOD	134
APPENDIX IV. THE TELLURIC METHOD	

LIST OF FIGURES

	<u>Page</u>
Figure 1. Prospect location map of the Valles Caldera prospect, New Mexico.	2
Figure 2. Strip chart records from a quiet (A) and a noisy (B) telluric profile station.	13
Figure 3. MT station locations.	16

LIST OF PLATESPlate  
Number

- I Telluric and Magnetotelluric Station Location Map
- II Telluric Profile A
- III Telluric Profile B
- IV Telluric Profile C
- V Telluric Profiles D and H
- VI Telluric Profiles F and E
- VII Telluric Profile G
- VIII Telluric Noise Histogram
- IX Magnetotelluric Profile B
- X Magnetotelluric Profile D
- XI Magnetotelluric Profile G

## I. INTRODUCTION

This report describes the results of a combined magnetotelluric (MT)-telluric profile (TP) survey performed by Geconomics, Inc. of Berkeley for the Union Oil Company of California. The survey took place at Baca Location No. 1 in Sandoval County, New Mexico during June and July, 1976. Its purpose was to determine the thickness and structure of the volcanic sediments and underlying formations, and to interpret the results in terms of local geothermal potential.

### Description of the Prospect

Baca Location No. 1, a 96 sq. mi. privately-owned ranch, encompasses most of the area known as the Valles or Jemez Caldera in the Jemez Mountains (see Figure 1). The Baca is a mountainous area lying between an elevation of 8,000' to 11,000', and has densely forested slopes and grassy elongate valleys that roughly outline the caldera rim. The prospect is accessible via Highway 4 through Bernalillo or Los Alamos.

### Data Acquisition and Reduction

Telluric profile data was recorded using Geconomics' Mark II telluric receiver and a Brush 2-channel chart recorder. Stations were spaced 1,000' apart on lines A-G and 500' apart on line H; locations are shown on Plate I. Telluric profile (TP) data was reduced according to the procedure described in Appendix III.

Magnetotelluric data was recorded on the Geconomics Mark II system which utilizes a cryogenic magnetometer and a 4-channel FM tape recorder. Results were computer-processed as described in Appendix III, Sections III and IV. Layered resistivity models were obtained from MT data by matching input data to 2 and 3-layer model curves. These curves must be viewed as merely an aid in defining the local resistivity structure. Since the area does not even grossly approximate horizontal layering, the curves are given as a best fit set for each station. Several MT profiles were also drawn from raw apparent resistivity data. These offer the advantage of a direct qualitative interpretation of data that has not been subjected to the prejudices of the interpreter.

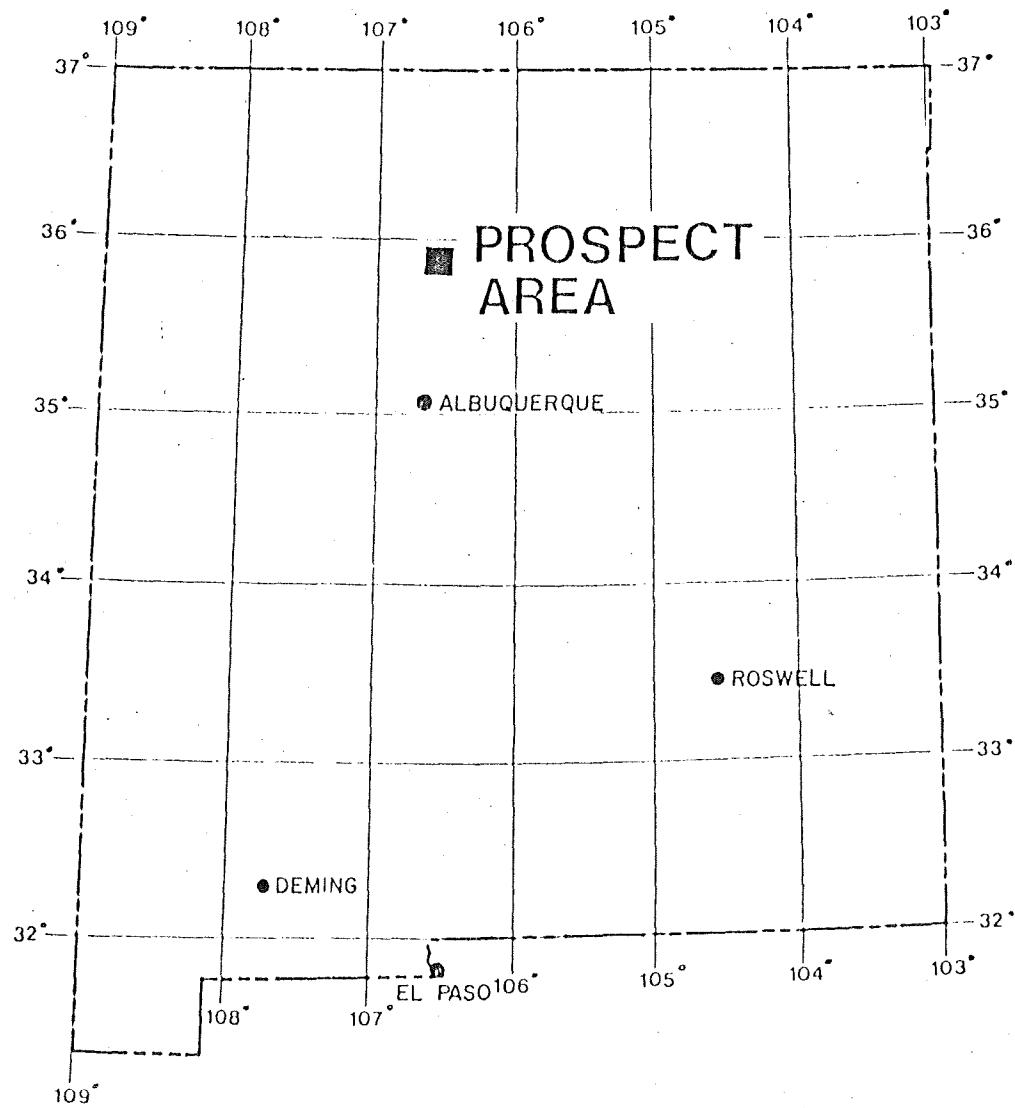


Figure 1. Prospect location map of the Valles Caldera prospect, New Mexico.

Our recordings and the daily reports of the Space Environment Services Center of the Department of Commerce show the geomagnetic field during June and July was quiet to unsettled. Although such conditions provide fair to good signal for MT and TP surveying, the daily lightning storms in this part of New Mexico interfered considerably with data acquisition in the early afternoon when natural signals are strongest.

## II. GEOLOGY AND GEOPHYSICS

The general geological setting of the Valles Caldera and Jemez Mountains has been described by Smith and others (1970) of the USGS, and West (1973) of the Los Alamos Scientific Laboratory (LASL). Review articles covering the regional geophysical data and the geophysical detailing of the LASL Hot Dry Rock Project site just west of the Valles Caldera have been published by Jiracek (1974), West (1974) and others. We will assume herein that the reader has familiarized himself with the geological and geophysical setting of the prospect.

### Pertinent Features

Of primary interest to this survey are the north to northeast trending normal faults associated with the Rio Grande rift which are thought to be concealed beneath the Tertiary and Quaternary volcanics of the Jemez Mountains. On the geologic map of New Mexico (1961) fault "swarms" can be seen trending toward the Valles Caldera from the northeast and southwest, mainly in pre-Tertiary sediments. If these faults continue beneath the volcanic section they might form the root zone of the hydrothermal plumbing system associated with the Valles Caldera. Geologically recent faulting includes the caldera ring fracture zone which is almost totally concealed by later volcanic and clastic sediments, the Redondo dome radial fracture system, and the Redondo Creek graben faulting. The latter is possibly a surface expression of one of the Rio Grande faults.

Resistivity work by Jiracek (1974) indicates that the Jemez volcanic suite has an average resistivity of 50 to 1,000 ohm-meters, and is underlain by 10 to 50 ohm-meter pre-Jemez aquifers; these sediments lie on a Pre-Cambrian basement that has a resistivity in excess of 800 ohm-meters. We infer from Ross (1961) that the total thickness of the volcanic pile is between 800 meters and 1,600 meters (2,500'-5,000') in the caldera area.

The geothermal system in the Valles Caldera is known to be a water-dominated system (Dondanville, personal communication, August, 1974) which will tend to lower the resistivity in fracture zones anywhere from 5% for pure water to several orders of magnitude for brines. Results of the present telluric profile survey indicate that the water-saturated

fractures are two to five times more conductive (less resistive) than their host rock.

#### Effect of the Geologic Structure on the Present Survey

The complex sequence of volcanic sediments beneath the survey area and the multiple fracture patterns have a profound effect on the electric currents measured by the telluric profile and magnetotelluric methods. These effects can be enumerated as follows:

1. Elongate conductive fracture zones tend to channel telluric currents and polarize the incoming electric field signal. These features can yield misleading MT results.
2. There is significant evidence that such features cause incoherency and phase shifting of incoming signal. This effect is herein called telluric "noise" for convenience. This is not meant to imply that geologic features generate noise; rather, the features affect incoming signal so as to make it incoherent or "noisy". One aspect of this "noise" is that it lessens data quality at stations near noisy structures. Other aspects of noise are more thoroughly discussed in sections III and IV.

### III. TELLURIC PROFILE RESULTS

A total of eight telluric profiles <sup>WAS!</sup> ~~were~~ measured across the Baca Prospect; locations of profile lines are given in Plate I. The lines varied in length from 1-13 km; seven lines were measured with stations spaced 1,000' apart while the eighth profile, H, utilized 500' stations for greater detail. Data quality throughout the time of the survey was generally good with signals much stronger on the north-south lines than the east-west. (This phenomenon is explained with the magnetotelluric results, Section IV). Data was taken in four discrete frequency bands for all profiles. These bands (8 Hz, .5-2 Hz, .03-.06 Hz, and .008-.045 Hz) provide variable depth recordings beneath each site. Data <sup>not included</sup> reduction procedures are outlined in Appendix III. <sup>in III</sup>

Plates II-VII show the results of telluric profiles. On each is indicated all the necessary data for qualitative interpretation, including a topographic profile, a J-value profile and an interpreted subsurface pseudo-section. Faults are noted by their telluric signature as  $\sigma$  (conductive) or  $\rho$  (resistive). The scale of these plates is the same as the base map. Topographic corrections were not taken except for a mathematical correction of line lengths; in most cases this is no setback since the correlation between high frequency tellurics and topography is usually apparent, while low frequency telluric-topography corrections are not significant.

A general description of the theory of telluric profiling <sup>not included</sup> is given in Appendix IV. Readers unfamiliar with telluric method should study this appendix before reading the interpretation section.

#### Profile A (Plate II)

Profile A is an east-west line approximately 2 miles long beginning .5 mile south of the Union Oil office near Deer Canyon and ending at the base of Redondo Peak. The profile crosses the southern end of Redondo Border and the flatlands of Banco Bonito. Topographic effects were minimal and data quality was excellent with the exception that 8 Hz data was unobtainable because nearby power lines buried the incoming signal with 60 Hz noise.

The profile (Plate II) gives a good view of structural features along the line. The high frequency data (.5 to 2 Hz) does not correlate with lower frequency data, indicating that it is exclusively sampling shallow, sedimentary features,

and implying that basement is probably deeper than 1 km. The dip in the J values profile seen between Stations 4 and 6 is probably indicative of thickening sediments in Redondo Creek Valley and the abrupt rise near Station 11 is more likely topographic than structural.

The low frequency bands probably give a good cross-section of the basement structure along the profile line. The close correlation between the two low bands implies that the basement itself is fairly homogeneous. One exception to the close correlation occurs at Station 6 where a deep-seated graben fault is encountered. A J value high between Stations 4 and 7 is an indication of the southernmost extension of Redondo Border beneath the sediments, and the striking discontinuity near Station 7 forms the beginning of the Redondo Canyon graben. Profile A suggests that this graben is bordered by steeply-dipping normal faults to the west and a more gradual eastern border near Redondo Peak. Telluric data suggests that basement depth is 3 to 4 times greater in the graben than outside.

#### Profile B (Plate III)

estimated length ≈ 2.5

Profile B is a north-south telluric line 7.5 miles long measured up Redondo Creek Canyon. It begins in Banco Bonito, crosses Redondo Border, and terminates in Valle Seco. The profile was measured up a long, gradual uphill slope where a maximum of 1,500 ft in elevation difference was seen; the effect of this topography on high frequency data is significant. Data quality was generally good though 8 Hz signal was obtainable only after Station 10 because of power line interference. At some stations, the telluric signal contained a large amount of incoherency; this phenomenon causes problems in data reduction but may also be a source of geologic information (see Telluric Noise Analysis).

The interpretation of Profile B data is organized into the following list of observations:

1. A J value low that correlates with the Redondo Canyon graben is evident between Stations 13 and 27 on the three lowest frequency bands. The maximum resistivity contrast is greater than 4 to 1 and the source depth for the low lies between 1 and 4 km. Analyses of low frequency data (.008-.045 Hz) suggests that resistivities increase beneath 4 km. 8 Hz data do not show the graben feature but more or less reflect topography in this region.

2. Several intragraben structures are apparent. Fault or contact zones are likely near Stations 14, 22 and 25 and possibly near Station 16. These faults might be high permeability zones and worthwhile drilling targets.
3. The resistive volcanic structure beneath Redondo Border is seen between Stations 27 and 31. J values here increase to pre-graben values. Additional faulting is seen after Station 31. A low frequency J value anomaly after Station 32 occurs in the topographic high of Redondo Border, implying that this region could have geothermal promise. This possibility needs to be confirmed by additional geophysical detailing and drilling.
4. Between Stations 3 and 10 the telluric signal is distorted by geology on all bands. It is likely that this region either crosses several perpendicular faults or lies in the strike of a parallel NE trending fault zone. Additional evidence of this last possibility is manifest in the abundance of NE trending faults encountered throughout the survey on E-W lines.
5. Quantitative telluric modeling (computer modeling) might be very helpful in delineating the source depths and resistivity contrasts. These models could also be compared with the MT models for a more accurate picture of the structure.

#### Profile C (Plate IV)

Profile C is a 16-station east-west line that traverses the length of Valle Seco into the Sulfur Creek area. Data was obtained on all four frequency bands and though signals were low, there were no unusual noise problems. Topographic relief was low and corrections are minimal.

The high frequency data bands show little structure along their length and no major change in J value from east to west. This implies that near surface sediments are conductive and uniform in composition.

The low frequency bands are different in character from each other. The .03-.06 band in general reflects features

that the higher bands show, which suggests that basement is <sup>probably the</sup> either quite deep (greater than 3 km) or that near-surface sediments are very conductive. The .008-.045 band, however, probably does give a rough idea of basement structure along Profile C. It shows that basement rises to the west in several distinct steps located between Stations 4 and 7. These step faults, which have no surface expression, are also evident on profile B, Stations 32-39, and the general strike is probably northeast, parallel to Redondo Border. After Station 7 the .008-.045 profile shows that the depth to basement gradually lessens till the Sulfur Creek area is reached. This basement rise might occur in several distinct steps or as a gradual slope.

The area traversed by this profile shows some geothermal promise. Between Stations 4 and 7 there appears to be a thick blanket of insulating sediments overlying a fractured basement. One interpretation is that this underlying layer of higher conductivity is associated with a higher subsurface temperature.

#### Profiles D and H (Plate V)

Profiles D and H were measured up Alamo Canyon from the Sulfur Creek area to Redondo Border. Both profiles are 12 stations long but profile H is a line with 500 ft-station spacing over the last 6,000 ft of line D. Data quality was generally good though signals were very low. A zone of high "noise" was encountered near Station 8 of profile D (also Stations 3 and 4 of profile H) where data recording times were necessarily long to extract consistent J values. (The nature or character of this "noise" was not quantitatively analyzed.) The topography was not severe until the easternmost extent of each profile where Redondo Border is encountered; the effect of this topography on the data is not obvious.

A quick glance at Plate V shows that over much of the intersected region the profiles do not match. For example, Profile D shows a single large downdrop structure near Station B while profile H shows a series of fault structures over the same region. The complexity of the region and the large amount of "noise" in the signal make it difficult to distinguish between these two. It is possible that different telluric field polarizations are manifest on the profile data, allowing each to see a different "profile" of a three-dimensional geometry. It is clear that under such complex geologic conditions where multiple fracture patterns may exist, the two-dimensional assumption by which telluric data is reduced breaks down. Under such conditions the quantitative value of telluric data is suspect. Qualitatively the data is useful because it

does not indicate a series of discontinuities near Station 8, profile D, and Stations 3-5, profile H; also, it does show the faulted region as a low resistivity zone at depth. In these major areas both profiles agree.

Evidence of strike-slip faulting is seen near Stations 2 and 5 of profile D. These faults may act as hot water or steam conduits as is probably the case at Station 5, which lies near the Westgate geothermal well. The depth to basement in this area is unknown but telluric profile D suggests that it is no deeper than basement in the Sulfur Creek area and would therefore probably not contain sufficient thickness of reservoir rock to hold large amounts of geothermal fluid.

Both telluric profiles D and H show faults as abrupt structures that affect only small areas. This implies that these faults trend normal to the profile in an approximately NE direction. To verify this it is necessary to measure another line parallel to line D, which suggests that line E be continued for eight or nine stations.

#### Profiles F and E (Plate VI)

Line F is a 25 station profile measured up Sulfur Creek beginning near the Highway 4 road cutoff and terminating at the base of Cerro San Antonio. The line crosses over several known hydrothermal zones and hot springs. Profile E is a three-station line measured up Short Canyon; this line was curtailed because of lack of access. Data quality was in general excellent for both lines with all four bands producing good data. Topographic effects were small.

Qualitative interpretation is organized into the following:

1. Profile F trends subparallel to a series of northeast-trending faults. These faults were probably crossed several times and are likely responsible for the Sulfur Springs thermal area.
2. A resistivity low which correlates with the Sulfur Springs hydrothermal area shows up between Stations 10 and 12. The zone is clearly defined and probably extends one or more kilometers in depth with a telluric J value contrast of about 3 to 1. The high frequency data show the greatest J value contrast which implies that much of the hydrothermal phenomenon encountered along this line is near surface.

3. Low frequency data implies that basement depth is shallow, probably fairly level after Station 3 and slightly deeper before 3. There appears to be a resistive plug-like feature between Stations 19 and 22 that might be the substructure of Cerro San Antonio.
4. Profile E is too short to show any significant trends. The profile crosses a fault near Station 2 and it is possible that the same fault is encountered beneath Station 2 of profile D, but with only three stations, this is unclear. This important profile might hold the key for solving the structural puzzle of profile D and should be finished in the future.

#### Profile G (Plate VII)

Profile G is an 18-station east-west line measured through Jaramillo Creek Canyon beginning just west of Valle Grande and ending near Redondo Border. Signal was good but fairly low in amplitude for all four data bands. The topography is gentle and its effects on any recorded bands are probably insignificant.

The J value plot, Plate VII, shows radically different characteristics for high and low data bands. High frequency data shows resistivities decreasing gradually westward with little interfering structure. This implies that sediments gradually become more conductive or thicker westward, an unexpected phenomenon since the canyon here slopes uphill and sediments are expected to be more resistive.

The low frequency bands exhibit more complex behavior; they might give a rough basement profile. A low resistivity zone encountered between Stations 3 and 6 appears to be fault-controlled and might represent a crushed zone from a normal fault. A resistivity contrast of about 4 to 1 exists here and deserves careful study by other survey methods to determine if the area has significant geothermal potential.

There is also a J value peak between Stations 10 and 12 that might represent a dike-like feature in the basement. But since it is unusual for such a structure to leave high frequency band data undisturbed, alternatively it might represent a basement horst starting with Stations 16 and 17. Near Station 17, all frequencies dip considerably, indicating that the profile has crossed into the Redondo Canyon Graben. This point is significant as it places an eastern geographic border to the graben structure.

*probable*

#### IV. TELLURIC NOISE ANALYSIS

A plot of natural incoherent noise measured along profile B for the .03-.06 frequency band is given in Plate VIII. The plot is a qualitative analysis of natural noise that interferes with telluric signals.

The source for such noise is not clearly defined. High noise could be the result of geologic structures that act as barriers to telluric currents; it could also be directly related to an active hydrothermal system. This short study focusses only on the amplitudes of relative noise affecting telluric profile B of this project.

Noise analysis was performed in the following manner:

1. System noise, including both instrumentation and electrode noise, is assumed constant. A much longer study is necessary to confirm this assumption since instruments may drift, electrodes change potential with temperature, and changing atmospheric conditions may also induce noise. These effects are assumed small, however, and field experience to some degree justifies this assumption.
2. Noise is defined as incoherency of telluric signal (Figure 2). In other words, when telluric signals are high but still incoherent the noise level must also be high. Conversely, when signal levels are low but coherent, then noise levels are also low. Noise levels are determined by measuring signal levels and qualitatively evaluating the amount of contained noise. The evaluation results from retracing a characteristic normalized segment of signal from the Ex onto the Ey channel and measuring the amount of discrepancy between corresponding waveforms. The noise levels were then ranked as follows:

high noise	$N > 1 \text{ mvolt}$
medium noise	$.1 \text{ mvolt} < N > .05 \text{ mvolt}$
low noise	$.05 \text{ mvolt} < N > .02 \text{ mvolt}$
quiet	$N < .02 \text{ mvolt}$

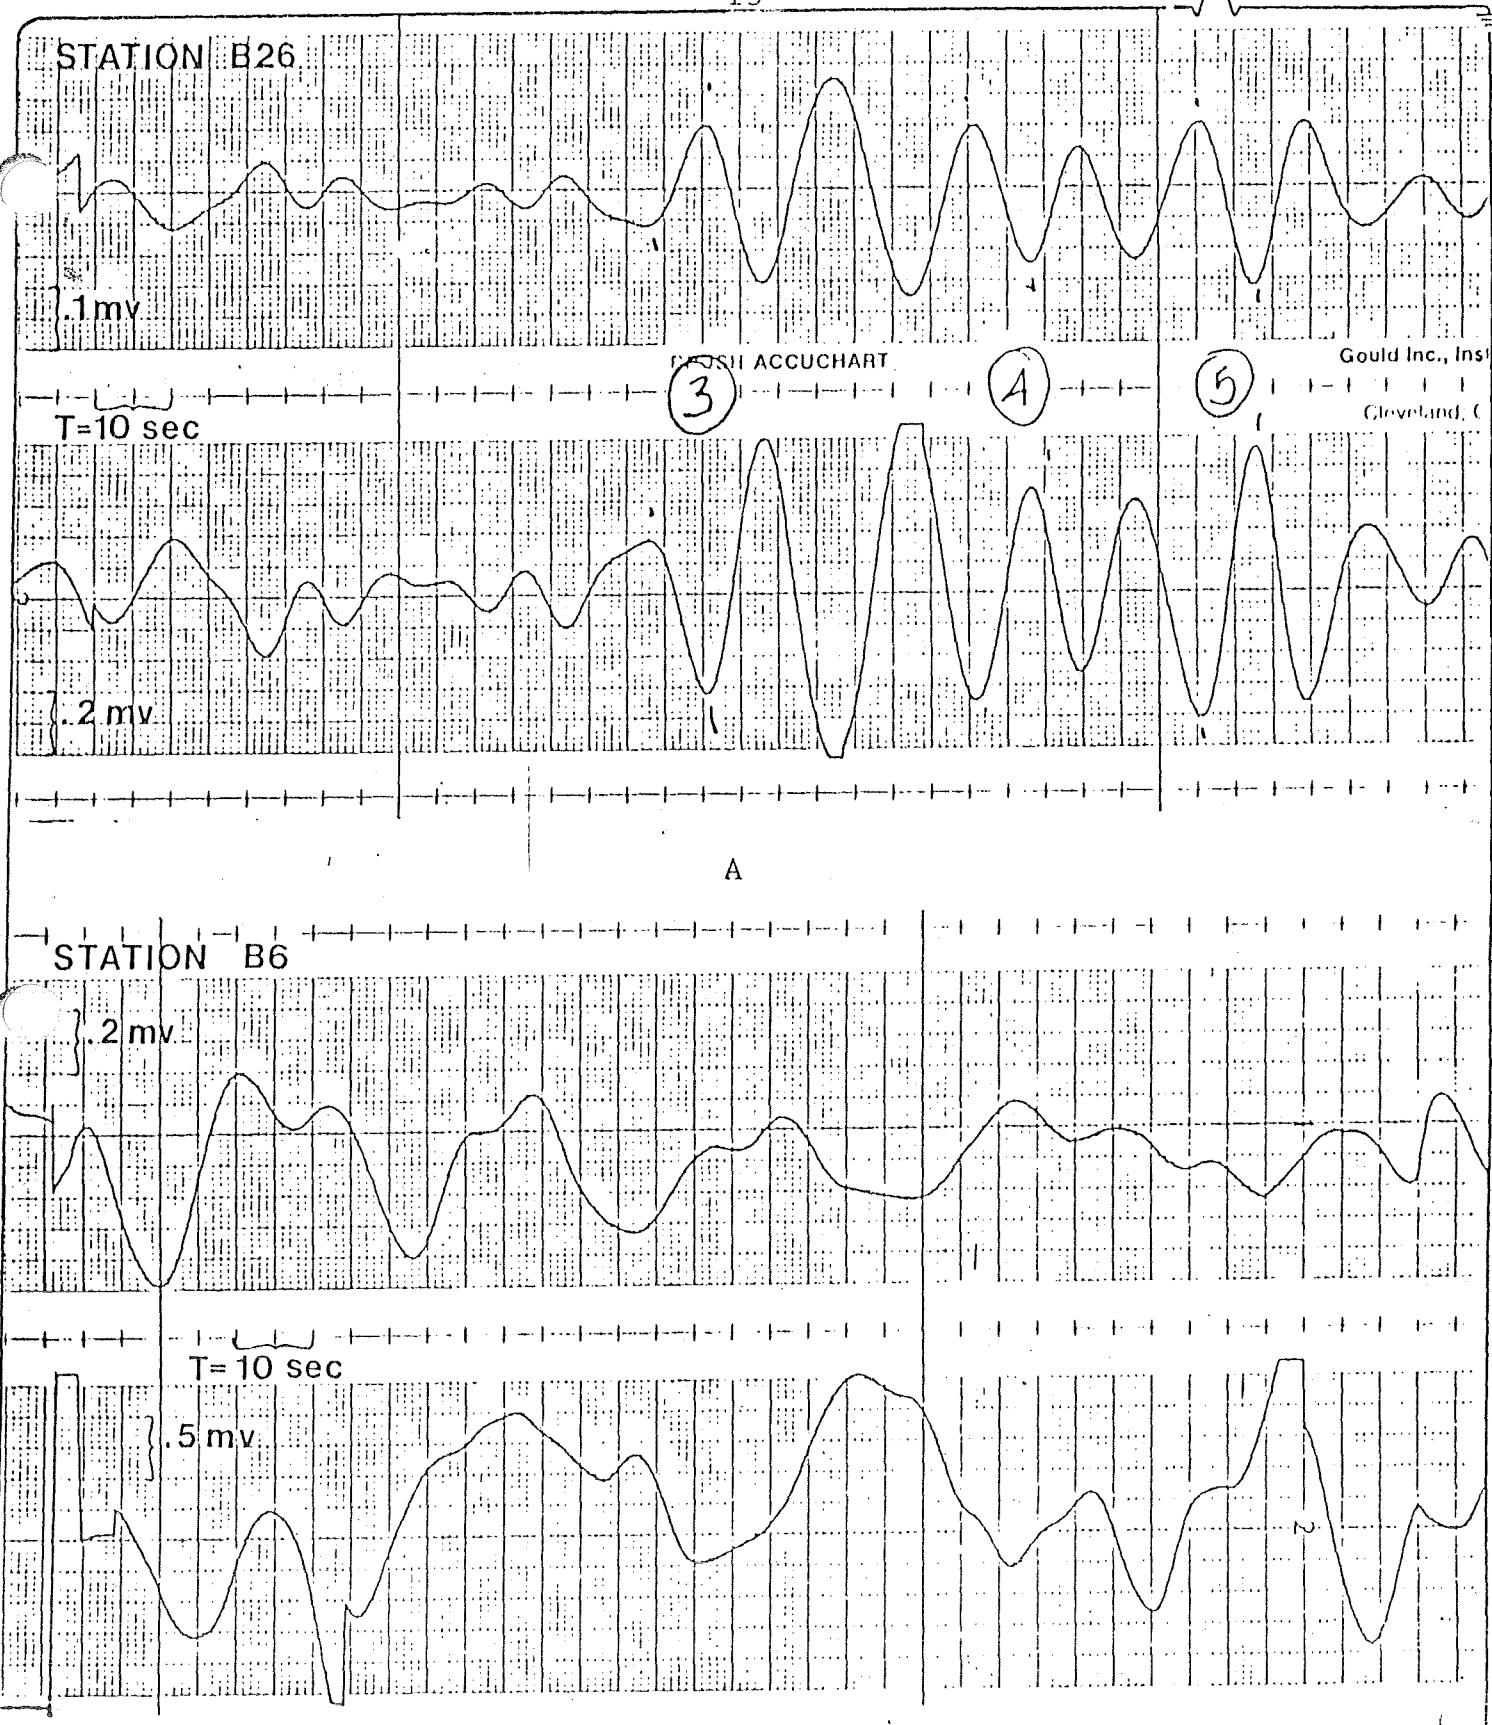


Figure 2. Strip chart records from a quiet (A) and a noisy (B) telluric profile station.

These divisions are more or less arbitrary and the need for quantitative analysis of noise data is obvious. The purpose of this study, however, is simply to identify the noise and attempt to isolate some possible sources.

In most cases high noise was found to correlate with rapid phase changes of telluric signal between the two channels. This suggests that noise highs may be correlated with interfering geologic structures since such structures (i.e., faults or contacts) can phase shift the signal when the source field direction changes because they act as barriers to the flow of current and may reflect or refract incoming signal. This same phenomenon may also be responsible for the highly incoherent signals, hence responsible for high "noise".

A block histogram of noise levels along profile B is shown in Plate VIII. This plot shows several distinct noise highs between Stations 4-8, 18-25, and 30-34. Between Stations 4 and 8 the noise high correlates with a region of complicated structure. The area is severely faulted and also might be the site of a hidden subsurface intrusive (see MT profile B, page 23). This area, located near telluric station #6, was the highest noise reading encountered. Station 6 required 1.5 hours to obtain consistent J-values; this is three times longer than the normal recording time.

Between Stations 18 and 25, telluric data was also very noisy, suggesting that the complicated geologic structure of Redondo Creek Graben significantly disturbs telluric current flow. A noise high between Stations 30 and 34 correlates well with a J-value low and location of probable NE trending faults (see page 8).

## V. MAGNETOTELLURIC RESULTS

Twenty-five magnetotelluric sites were occupied in the Baca Prospect in July, 1976. Four additional sites planned will be occupied in December, 1976. Data quality was generally good but signals were low. Interpretable data was extracted from all but three stations (#10, 11, and 13). It was computer analyzed (Appendix III) and evaluated by polarization, apparent resistivity and modeled resistivity values.

Figure 3 is a map of the rotated X-axis for all stations occupied. For stations where the rotated data ensemble was incomplete for modeling (i.e., skewness values were too high), the angle for tensors that did rotate was taken (see Appendix III). Note that there is a  $90^\circ$  ambiguity in evaluating <sup>true</sup> these results. In other words, the rotation separates two orthogonal resistivity curves, strike and dip, but does not say which is which. This may be resolved by comparing curves for adjacent stations that have approximately the same rotated orientations.

In many cases the rotated angle will show fault zones and other lineaments; this has also proven true in the present survey. In general, the X-axes are rotated to follow the canyons, i.e., the rotated X arrow points up or down the canyons. This is expected behavior since many of these canyons are probably either collapse structures or strike-slip fault zones. The best examples of this behavior are up Sulfur Creek Canyon, Alamo Canyon and Valle Seco. The X arrows for stations near the perimeters of the Caldera (MT Stations #25, 24 and 1) tend to follow the boundary, suggesting a ring faulting system there. In Redondo Canyon, there appears to be at least two sets of faults or lineaments. One set trends approximately N25E and another N60E. This dual fault pattern is especially evident near MT Stations 4, 5 and 6, and it is significant that this fault intersection lies in Redondo Creek Graben. Also, at the north side of Redondo Border there apparently lies an intersection of EW and NE trending faults near MT Stations 7, 8, 9 and 10. Because of the thick alluvial cover in this region much of this faulting is not obvious from surface features.

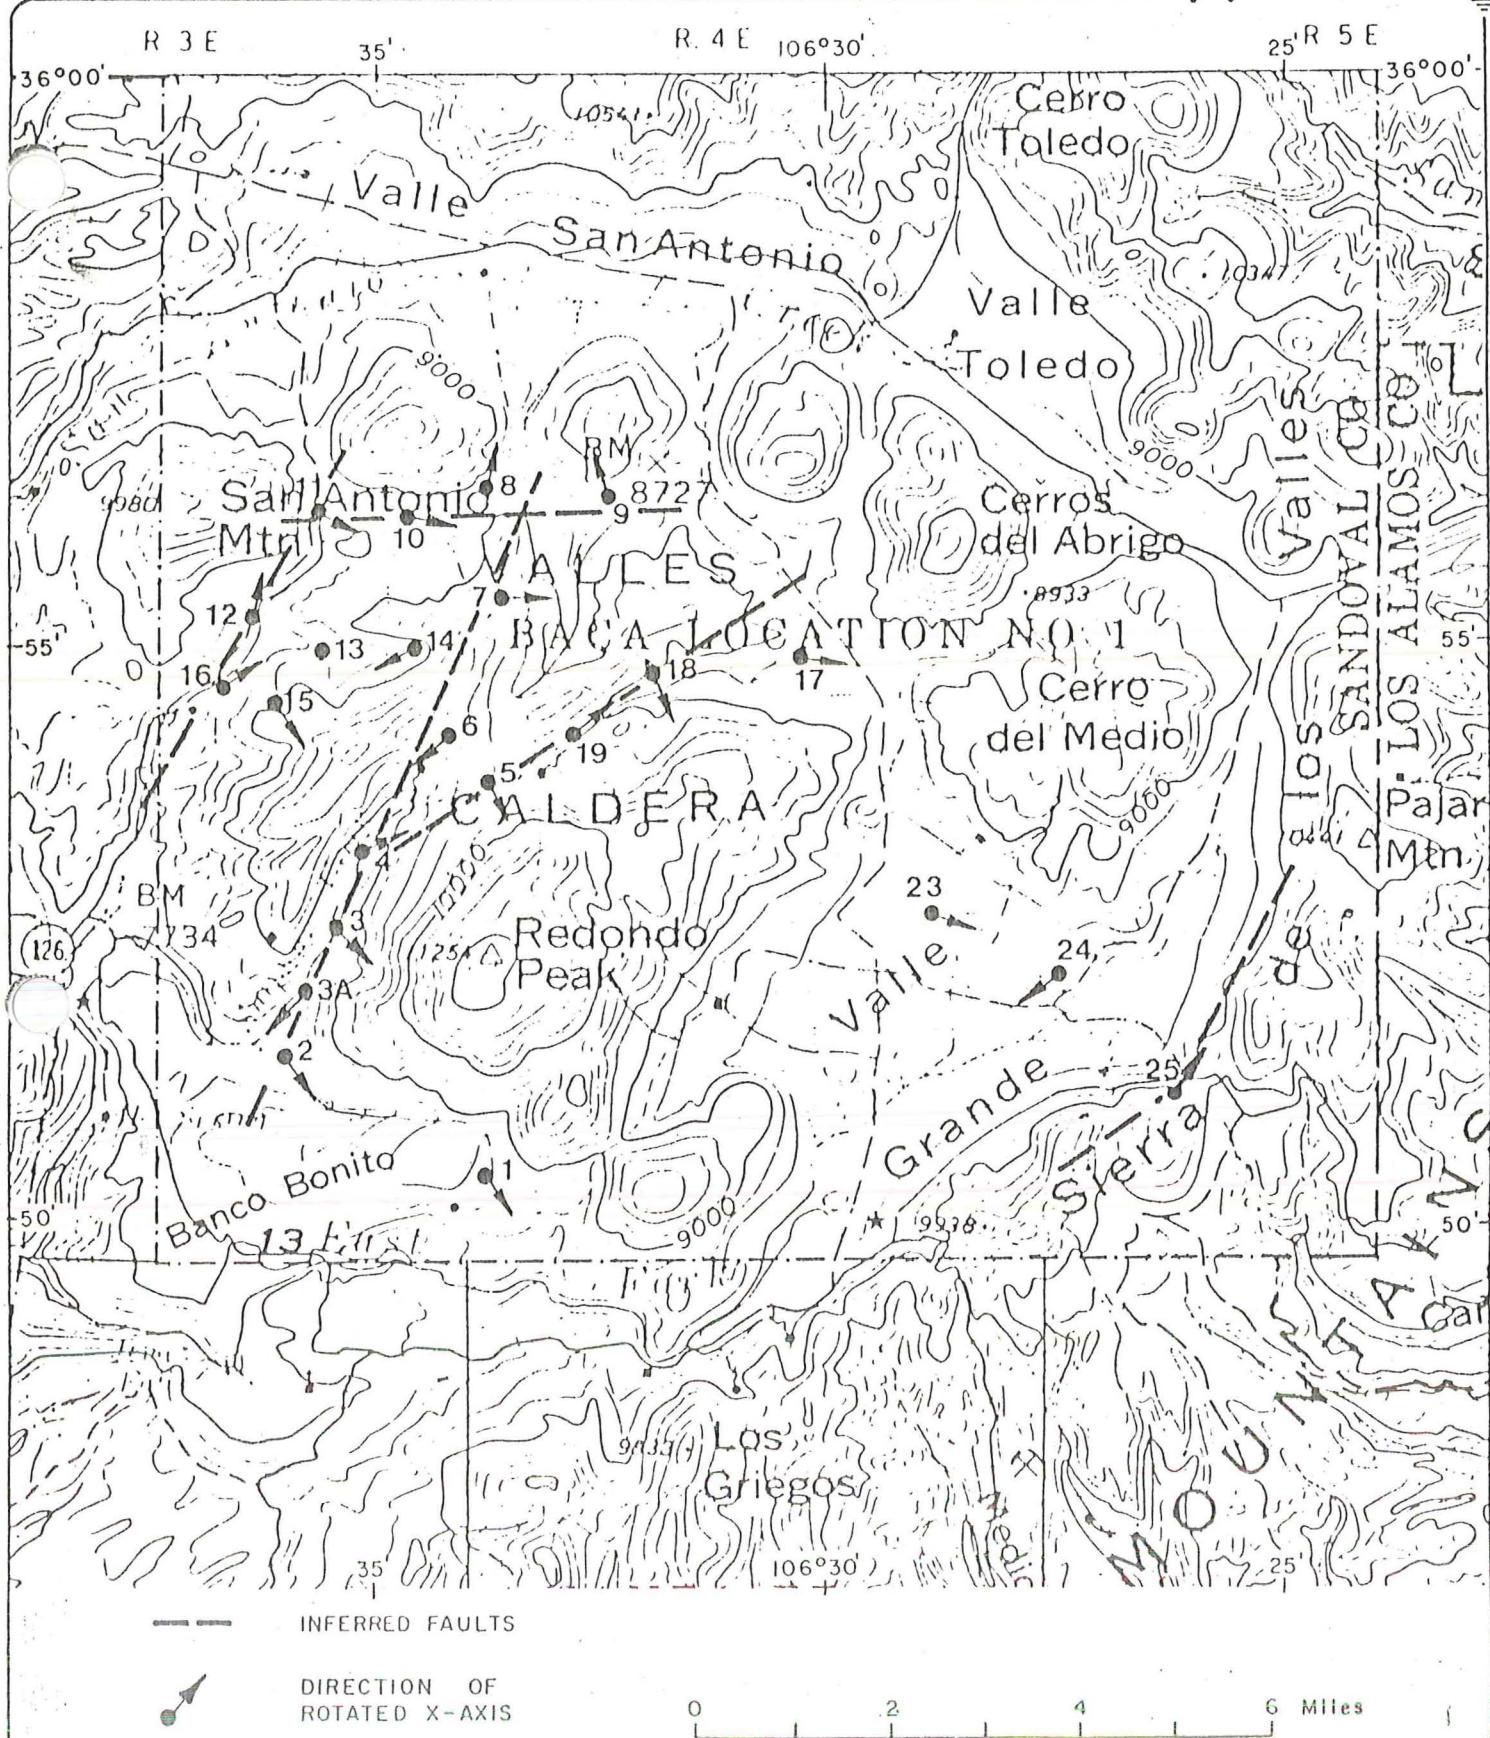


Figure 3. MT station locations.

### Model Curves

Two and three-layer model resistivity curves were fit to all apparent resistivity data (Table 1). Rotated data was used to fit most curves but when skewness values were too high (see Appendix III) non-rotated resistivities were used instead.

Since the Valles Caldera is a geologically complex area, layered models are of limited use since the true structure does not even grossly approximate them. The layered interpretations can at best provide a framework, i.e., a range of models where characteristics of the rocks can be inferred: the resistivities must therefore be considered approximate. Examples of the obvious deviations from layering are observed on data plots from several MT stations (#17, 20, 24). On these graphs any possible curve fitting the data points would have a slope exceeding  $45^\circ$ . This is an impossible situation in a layered medium even if the resistivity contrast between layers is infinite.

The curves are most useful in this area when used as a qualitative tool for evaluating resistivity. In other words, they will accurately identify resistors or conductors in a section but the layered interpretation on depths, thicknesses or resistivities of units is not to be trusted. For this reason, a range of models is given for each curve and for the majority of these, only two and three-layer models are given.

TABLE 1

STATION DIRECTION	ROTATION ANGLE	MODEL	CROSSOVER FREQUENCY/ RESISTIVITY	CROSSOVER DEPTH(km)	1ST LAYER RESISTIVITY	1ST LAYER THICKNESS (km)	2ND LAYER RESISTIVITY	2ND LAYER THICKNESS (km)	3RD LAYER RESISTIVITY	3RD LAYER THICKNESS(km)	4TH LAYER RESISTIVITY	4TH LAYER THICKNESS
1 X	120	1:1:3:11/3	.2/13	.300	13	.300	1.3	.090	39	8		
	Y		1:10	.4/8	.500	8	.500	80	8			
2 X	143	1:1:10//1	.29/21	.440	21	.440	2.1	.440	210	8		
	Y		1:1:3//1	.44/26	.750	24	.750	2.4	.750	72	8	
3 X	120	1:100	.26/7.5	.300	7.5	.300	750	8				
	Y		1:100	.27/5.4	.250	5.4	.250	540	8			
3A X	245	1:10	.23/6.0	.250	6.0	.250	65	8				
	Y		1:300	.35/13	.550	13	.550	3900	8			
3A X	245	1:100:3/3	.23/6.0	.250	6.0	.250	600	.750	18	8		
4 X	70	1:30	.25/1.3	.125	1.3	.125	40	8				
	Y		1:100	.24/2.7	.150	2.7	.150	2700	8			
5 X	120	1:300:3/7	.25/1.7	.140	1.7	.140	510	1.000	5	8		
	Y		1:1000:3/10	.32/1.5	.160	1.5	.160	1500	1.600	4.5	8	
6 X	230	1:100	.42/8.5	.550	8.5	.550	850	8				
	Y		1:30	.35/1.8	.190	1.8	.190	54	8			
6 X	230	1:10:300/1	.38/9	.500	9.0	.500	90	.500	2700	8		
	Y		1:10:300/1	.35/1.8	.190	1.8	.190	18	.190	540	8	

TABLE 1, cont'd.

STATION DIRECTION	ROTATION ANGLE	MODEL	CROSSOVER FREQUENCY/ RESISTIVITY	CROSSOVER DEPTH(km)	1ST LAYER RESISTIVITY	1ST LAYER THICKNESS (km)	2ND LAYER RESISTIVITY	2ND LAYER THICKNESS (km)	3RD LAYER RESISTIVITY	3RD LAYER THICKNESS(km)	4TH LAYER RESISTIVITY	4TH LAYER THICKNESS
6 X	230	1:100:10/3	.42/8	.550	8.0	.550	800	1.650	80	8		
	Y	1:100:3.7	.35/1.8	.190	1.8	.190	180	1.330	0.6	8		
6 X	230	1:10	.36/9.4	.500	9.4	.500	940	8				
	Y	1:300	.33/1.5	.175	1.5	.175	450	8				
6 X	230	1:1000:3/3	.38/9	.500	9.0	.500	9000	1.500	27	8		
7 X	85	1:10:.1/1	.3/16	.550	16	.550	160	8				
	Y	1:1000	.28/3.2	.200	3.2	.200	3200	8				
7 X	85	2:1:3/1	.2/18	.350	36	.350	18	.350	54	8		
	Y	1:100	.28/4	.200	4.0	.200	400	8				
7 X	85	1:3:.3/1	.3/19	.550	19	.550	57	.550	6	8	8	8
8 X	200	1:3:10/3	.32/3	.225	3.0	.225	9.0	.775	30	8	8	
	Y	1:10:3/10	.3/5	.300	5.0	.300	50	3.0	15	8		
8 X	200	1:3	.32/3	.225	3.0	.225	9.0	8				
	Y	1:10	.3/5	.300	5.0	.300	15	8				
8 X	200	1:3:100/1	.15/4	.125	4.0	.125	12	.125	400	8	8	
	Y	1:3:100/.7	.15/8	.175	8.0	.175	24	.090	800	8	8	
8 X	200	1:3:10/.7	.15/4	.125	4.0	.125	12	.875	40	8		

TABLE 1, cont'd.

STATION DIRECTION	ROTATION ANGLE	MODEL	CROSSOVER FREQUENCY/ RESISTIVITY	CROSSOVER DEPTH(km)	1ST LAYER RESISTIVITY	1ST LAYER THICKNESS (km)	2ND LAYER RESISTIVITY	2ND LAYER THICKNESS (km)	3RD LAYER RESISTIVITY	3RD LAYER THICKNESS (km)	4TH LAYER RESISTIVITY	4TH LAYER THICKNESS
9 X	160	1:1:3/.1	.23/3.5	.175	3.5	.175	.35	.020	11	8		
	Y	1:30:3/.7	.23/2.3	.200	2.3	.200	69.0	.140	.69	8		
12 X	24	1:30:100/1	.28/1.9	.180	1.9	.180	57	.180	190	8		
	Y	1:1000:30: 100/.1;1	.21/1.4	.100	1.4	.100	1.4K	.014	42	14	140	8
	X	1:10:30/1	.28/1.9	.180	1.9	.180	19	.180	57	8		
14 X	245	1:3:100/7	.25/12	.275	2	.275	6	1.900	1200	8		
	Y	1:10	.31/1.0	.125	1.0	.125	10	8				
14 X	245	1:3:10/.7	.28/11	.400	11	.400	33	.280	110	8		
	Y	1:30:.3/.7	.27/1.0	.100	1.0	.100	30	.700	.30	8		
15 X	320	1:30:1000/.1	.38/1.3	.180	1.3	.180	1.3K	.018	39	8		
	Y	1:30:100/.1	.26/3.3	.180	3.3	.180	330	.018	99	8		
	Y	1:1:30/.1	.56/2.3	.250	2.3	.250	69	.250	2.3	8		
	Y	1:10:30/.1	.48/2.1	.280	2.1	.280	63	.280	2.1	8		
16 X	60	1:3:30/.3	.35/1.9	.200	1.9	.200	5.7	.06	57	8		
	Y	1:3:300/.3	.35/4.9	.400	4.9	.400	14.7	.12	1470	8		
	Y	1:10:100/.1	.35/4.9	.300	4.9	.300	49.0	.03	490	8		

TABLE 1, cont'd.

STATION DIRECTION	ROTATION ANGLE	MODEL	CROSSOVER FREQUENCY/ RESISTIVITY	CROSSOVER DEPTH(km)	1ST LAYER RESISTIVITY	1ST LAYER THICKNESS(km)	2ND LAYER RESISTIVITY	2ND LAYER THICKNESS(km)	3RD LAYER RESISTIVITY	3RD LAYER THICKNESS(km)	4TH LAYER RESISTIVITY	4TH LAYER THICKNESS
17 X	103	1:3:.3/7	.3/40	.7 km	40	.700	120	4.9	12	8	8	
	Y	1:3:100/.1	.35/28	.800	28	.800	84	.08	2800	8		
18 X	340	1:10	.26/100	1.000	100	1.000	1000	8				
	Y	1:3	.39/17	.650	17	.650	50	8				
18 X	340	1:3:.3/.7	.35/110	1.5	110	1.500	330	1.100	1100	8	8	
	Y	1:3:.03/10	.39/17	.65	17	.65	50	6.500	.5	8	8	
18 X	340	1:100:10/3	.26/100	1.0	100	1.000	10,000	3.0	1000	8	8	
	Y	1:3:.01/10	.39/17	.65	17	.65	50	6.5	17	8	8	
18 X	340	1:10:3/3	.26/100	1.0	100	1.000	1000	3.0	300	8	8	
	Y	1:3:.001/10	.39/17	.650	17	.650	51	6.5	.017	8		
	Y	1:3:.01/10	.39/17	.650	17	.650	51	6.5	.17	8		
19 X	60	1:3:30/1	.31/27	.470	27	.470	8.10	.470	810	8	8	
	Y	1:3:30/.1	.19/9.6	.220	9.6	.220	2.88	0.22	288	8	8	
	X	1:3:10/.1	.35/29	.700	29	.700	87	.070	290	8	8	
	Y	1:3:10/.1	.14/10	.180	10	.180	30	.018	100	8	8	
20 X		1:30:300/.1	.32/1.9	.180	1.9	.180	57	.018	570	8	8	
	Y	1:300:100/.1	.32/6.4	.270	6.4	.270	1920	.027	640	8		

TABLE 1, cont'd.

BOSTON (N.Y.)

STATION DIRECTION	ROTATION ANGLE	MODEL	CROSSOVER FREQUENCY/ RESISTIVITY	CROSSOVER DEPTH (km)	1ST LAYER RESISTIVITY	1ST LAYER THICKNESS (km)	2ND LAYER RESISTIVITY	2ND LAYER THICKNESS (km)	3RD LAYER RESISTIVITY	3RD LAYER THICKNESS (km)	4TH LAYER RESISTIVITY	4TH LAYER THICKNESS
23 X	120	1:1:3/.1	.18/14	.3	14	.300	1.4	.030	52	8		
	Y	1:100:3/.7	.23/10	.3	10	.300	1000	.210	30	8		
23 X	120	1:3:10/.7	.45/19	.65	19	.650	.57	.500	190	8		
	Y	1:10	.35/13	.5	13	.500	130	8				
23 X	120	1:100:3/3	.48/22	.8	22	.800	2200	2.4	66	8		
	Y	1:100:3/3	.19/21	.375	21	.375	2100	1.10	63	8		
24 X	230	1:300:10/10	.43/20	.750	20	.750	61000	7.5	200	8	8	
	Y	1:300:10/10	.43/20	.750	20	.750	61000	7.5	200	8	8	
25 X	25	1:1:3/1	.21/12	.35	12	.350	1.2	.350	36	8		
	Y	1:1:3/3	.22/3	.15	3.0	.150	.3	.450	9.0	8		
25 X	25	1:.03:.3/3	.21/12	.35	3.0	.350	.100	1.000	1.0	8		
	Y	1:.03:.3/.1	.22/3	.15	3.0	.150	.100	.015	1.0	8		
26 X	135	1:10:100/7	.40/1.9	.300	1.9	.300	.19	2.1	190	8		
	Y	1:100:3/3	.45/20	.300	2.0	.300	200	.90	6.0	8		
	Y	1:300:10/1	.45/20	.300	2.0	.300	600	.30	20	8		

## VI. TELLURIC-MAGNETOTELLURIC RESULTS

To correlate with telluric profiles B, D, H and G, three magnetotelluric apparent resistivity profiles were drafted from stations located along telluric profile lines. MT data is given in parallel and perpendicular profiles where parallel resistivities are those measured parallel to the profile line, and perpendicular resistivities are orthogonal to the profile line. The parallel profiles are probably more indicative of actual apparent resistivities while perpendicular profiles are more sensitive to interfering structure (see *Rec. of U.S. Geol. Surv.*, Vol. 1, No. 1, 1968). The MT profiles are given in Plates VII-XI. Apparent resistivities are derived from the field data (Appendix I) and profiles are contoured from ten frequency points per station. Geographic correlation of MT and telluric stations along measured lines is shown in Plate I; A combined interpretation is given to T-MT data by area, below.

### MT Profile B (Plate IX)

Magnetotelluric profile B, plate IX, consists of seven stations measured up Redondo Canyon. MT data is correlated with telluric data, Plate III, in this interpretation.

Several significant anomalous zones are defined along T-MT profile B. The MT data indicates a resistivity high near Station 3 whereas telluric data shows an abundance of faulting without indicating the resistivity high. The area is severely contorted by faulting as shown in telluric profile B and much of this high might be local channeling but a resistive dike-body is also possible since MT #3 was *not likely* not measured exactly along the profile line.

A large resistivity low lies between telluric stations 13 and 27 and is covered between MT stations #3 and 7. This region is characterized by anomalous deep and shallow resistivities and an abundance of faulting. MT profile B suggests that much of this structure is controlled by collapse or normal faulting that occurs on several subparallel strikes crossing near MT #4, 7, and 19. The basement offset caused by these structures is unknown and the masking effect of the hydrothermal structures makes it very difficult to be accurately determined. The MT profile also pinpoints locations of several intragraben faults which may serve as plumbing conduits for deep fluid. Locations of intragraben faults probably lie near telluric

stations 17, 22, 24. The nature and offset of these structures is undetermined. Modeled resistivities for deep rocks within the graben are from 2 to 10 ohm-meters which is an accepted value for geothermal reservoir formations. The thickness of this anomalous zone is probably at least 1 km.

#### MT Profile D (Plate X)

MT profile D (Plate X) is measured up Alamo Canyon parallel with telluric lines D and H. H consists of three widely-spaced MT stations (#12, 14 and 16) and gives a good reconnaissance look at a complicated area. From the combined telluric-MT profiles we can draw the following conclusions on resistivity and structure in Alamo Canyon:

1. The MT and telluric profiles show that structure is <sup>Very high resistivity</sup> ~~Horizontal~~, very inhomogeneous, especially east of telluric station D8. A <sup>Horizontally</sup> ~~vertical~~ number of faults cross profile D here and many of them appear to be northeast-trending structures. Near MT #14 there apparently lies an intersection of a NE and EW trending fault pair that could provide a drilling target.

2. Between telluric stations H2-H12 there lies a low resistivity zone; this is also seen on MT profile D. MT data suggests a 3 to 1 resistivity drop in the area but this should be further investigated since only one MT station (#14) is diagnostic.

3. MT Station #7 shows a low resistivity zone at a <sup>Geop. resist.</sup> fairly shallow depth. In this zone apparent resistivities drop to one ohm-meter but it is unclear whether this effect is ? stratigraphic or structural.

#### MT Profile G (Plate XI)

Magnetotelluric line G was measured up Jaramillo Canyon and consists of four MT soundings (Plate XI). The apparent resistivity profile trends parallel to telluric profile G and major features correlate well between the two.

Apparent resistivities measured parallel to Jaramillo Canyon are moderate to low while perpendicular resistivities are high. This pattern also is shown on MT profile D, indicating that the strike direction is parallel with the valley and that many structures trend perpendicular to the axis of the valley.

The disparity between high and low frequency bands noted on the telluric profile G interpretation (page 11)

is also seen on MT profile G. If near surface sediments are fairly resistive and basement depth is fairly deep, then exactly the high and low bands should be expected to yield different results. MT profile G shows that this is most likely the case.

The perpendicular MT profile (Plate XI) probably outlines most of the structure up Jaramillo Canyon and some interesting features are observed. Near MT station 19 resistivities abruptly decrease westward on high and low frequency data implying that a major discontinuity has been crossed. Telluric data agrees with this assertion and furthermore suggests that this boundary is likely to be a high-angle normal fault that could mark the eastern boundary of Redondo Creek Graben.

The resistive body seen near MT #18 on the profile is also shown on telluric profile G. The earlier explanation that this body is a basement horst or a volcanic dike is further supported by the observed high apparent resistivities.

VII. REFERENCES

- Jiracek, G.R., 1974. Geophysical Studies in the Jemez Mountains Region, New Mexico. New Mexico Geological Society 1974 Annual Fall Field Conference.
- Ross, C.S., Smith, P.L., and Bailey, R.P., 1961. Outline of Geology of the Jemez Mountains, New Mexico. New Mexico Geol. Soc. Twelfth Field Conf., Albuquerque County, pp. 139-143.
- Smith, P.L., Bailey, R.A., and Ross, C.S., 1970. Geological Map of the Jemez Mountains, New Mexico. U.S.G.S. Misc. Inv. Map I-571.
- West, F.G.; 1973. Regional Geology and Geophysics of the Jemez Mountains. Los Alamos Scientific Laboratory, report LA-5362-MS.
- West, F.G.; 1974. Dry Hot Rock Project, New Mexico Geological Society Guidebook, 25th Field Conference, Ghost Ranch (Central Northern New Mexico).
- Woodward, L.A., Callender, J.F., and Zilinski, R.E., 1975. Tectonic Map of the Rio Grande Rift, New Mexico, Geological Society of America Map MC-11.

APPENDIX I

FIELD DATA FOR MAGNETOTELLURIC SOUNDINGS

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PRED EX	EY PRED EY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RX	APPARENT RY
.025	.0604	.8441	.7721	.6923	355	2	1.9233	2.2767
.026	.0567	.8697	.7995	.6772	381	2	2.4217	2.9866
.027	.0521	.8858	.8125	.6418	411	2	3.4020	4.2884
.027	.0479	.8997	.8225	.5539	447	2	5.6404	7.1009
.038	.0922	.8765	.8394	.4862	232	1	14.7510	15.6500
.041	.0893	.8791	.8560	.5308	240	1	13.3940	13.5550
.043	.0868	.8677	.8516	.5966	247	1	12.0120	12.3300
.047	.0848	.8496	.8153	.6001	252	1	10.6980	10.5830
.059	.1407	.8750	.7340	.3249	153	2	8.3407	7.0833
.064	.1419	.8857	.7225	.3299	151	2	7.2380	5.9884
.072	.1447	.8956	.7380	.4150	148	2	6.8355	5.7012
.083	.1500	.9039	.7703	.5454	144	2	6.8311	6.0151
.089	.2148	.9220	.8177	.7832	100	1	6.7959	6.4825
.102	.2253	.9521	.9148	1.4111	96	1	6.9538	6.5344
.121	.2411	.9616	.9323	1.7832	90	2	7.5892	6.5589
.137	.3278	.9670	.9420	2.0754	66	2	8.2033	6.5655
.147	.2653	.9616	.9311	2.0056	81	2	8.2889	6.5810
.163	.3579	.9557	.9154	2.0217	60	2	8.1646	6.4513
.201	.4018	.9408	.8830	1.6326	54	2	7.2956	5.9878
.208	.5004	.9397	.8792	1.5333	44	2	7.0996	5.8806
.258	.5684	.9315	.8721	1.7054	39	2	6.7645	6.3251
.261	.4694	.9297	.8696	1.7279	46	2	6.6793	6.3385
.318	.7638	.9250	.8596	1.6046	28	2	6.5774	6.8642
.335	.6697	.9192	.8636	1.6634	33	2	6.5235	6.8732
.410	.9027	.9150	.8815	1.6987	24	2	6.5190	7.5044
.461	.8305	.9089	.8673	1.3916	27	2	6.3186	7.9432
.486	1.1657	.9141	.8755	1.5391	20	2	6.4370	8.5153
.558	1.1161	.9098	.8521	1.1746	20	2	6.3256	9.1082
.604	1.4498	.2230	.3076	1.4617	355	3	.8066	1.2344
.614	1.3498	.2820	.3831	1.2916	381	3	1.2590	1.9861
.625	1.2498	.3728	.4840	1.2231	411	3	1.9098	3.1003
.639	1.1498	.4493	.6029	.9684	447	3	2.8357	5.1732
.652	1.9337	.9101	.8973	1.1008	16	2	6.4989	9.7977
.741	1.7793	.9039	.8588	1.1157	13	2	6.4889	9.2664
.816	1.4693	.8918	.8294	1.4392	16	2	6.7308	9.9798
.922	2.2128	.7239	.8621	.7266	232	3	8.3094	16.4356
.930	1.8602	.8958	.8221	1.7566	12	2	7.4261	10.8510
.974	2.1438	.5339	.7986	1.4359	240	3	6.2903	12.5570
1.035	2.2770	.8874	.8244	2.2219	11	2	7.8552	12.1980
1.041	2.0820	.5890	.8109	1.1491	247	3	7.2085	14.9190
1.130	2.0343	.6175	.8159	.8936	252	2	8.0828	16.7780
1.132	2.7157	.8728	.8018	2.5285	9	2	8.2639	12.9610
1.407	3.3775	.6198	.8128	.7688	153	2	9.8288	20.2790
1.444	2.5996	.8847	.7681	2.1092	9	2	9.3391	15.9670
1.548	3.4048	.7358	.8647	1.3612	151	3	11.9780	24.5260
1.550	3.1004	.8889	.7740	2.1901	8	2	10.1010	16.7320
1.644	3.6165	.8877	.7696	2.0065	6	2	10.5680	17.3710
1.727	4.1451	.8967	.7630	2.0891	6	2	11.4220	18.7140
1.736	3.9716	.7211	.8568	1.4317	148	2	13.3780	25.8660
1.999	3.5991	.7148	.8503	1.5750	144	2	15.8200	28.1300
2.148	5.1549	.7188	.8473	1.6678	100	2	17.1470	29.2960
2.458	5.4077	.6766	.8258	1.6890	96	2	19.1380	31.7510
2.555	4.5992	.8407	.6864	6.6163	5	2	15.2680	24.9020
2.584	5.1674	.8407	.6864	6.6163	5	2	15.4380	25.1790
2.611	5.7438	.8407	.6864	6.6163	5	2	15.6010	25.4440
2.636	6.3267	.8273	.6824	6.3841	4	2	16.6400	27.6270
2.843	5.7880	.6244	.7961	1.4495	90	2	22.1930	34.8210
2.278	7.2684	.5576	.7694	1.1446	66	3	22.6140	36.7130
3.538	6.3678	.5345	.7549	1.1320	81	3	24.0120	38.5910

Station 1

3.904	8.5889	.5117	.7288	1.0662	60	3	25.7720	40.3520
4.147	9.1224	.7111	.6644	1.8786	44	2	17.4980	31.4560
4.306	8.6125	.7111	.6644	1.8786	44	2	18.1710	32.6660
4.521	8.1374	.7111	.6644	1.8786	44	2	19.0770	34.2940
4.822	9.6432	.4140	.6584	1.2064	54	3	29.6960	37.6150
5.004	12.0093	.4122	.6614	1.2553	44	3	31.8800	38.4140
6.200	13.6407	.2771	.6331	.8383	39	3	36.7720	40.9440
6.259	11.2658	.2966	.6224	.8605	46	3	34.1770	42.0410
6.660	3.3298	.7099	.6635	1.8828	6	2	27.9180	50.3620
7.638	18.3298	.2909	.5779	.8549	28	3	40.1640	47.1520
8.036	16.0725	.2458	.5517	.9738	33	3	40.2880	39.3890
9.847	21.6647	.3054	.5009	.6912	24	3	43.0050	33.3500
10.732	5.3662	.6558	.6245	1.3539	3	3	29.3230	91.4070
11.073	19.9318	.4159	.5514	.6051	27	3	38.1220	33.0580
11.483	5.7415	.6558	.6245	1.3539	3	3	31.3740	97.7990
11.657	27.9775	.3901	.5253	.4791	20	3	42.2940	34.1190
12.519	6.2594	.6558	.6245	1.3539	3	3	34.2040	106.6200
13.394	26.7874	.7545	.7781	.7139	20	2	23.3850	55.9110
15.640	34.4080	.8704	.9256	.6847	16	3	15.7900	76.7190
17.793	42.7022	.9575	.9818	.7238	13	3	16.0260	91.6710
19.591	35.2634	.9789	.9883	.6998	16	3	19.1040	93.0310
22.323	44.6449	.9817	.9890	.7182	12	3	22.6270	103.4450
24.840	54.6478	.9801	.9843	.6347	11	3	30.0450	103.7500
27.157	65.1763	.9809	.9813	.6323	9	2	35.6110	96.9930
34.661	62.3908	.9807	.9737	.7700	9	3	23.7150	57.5810
37.205	74.4103	.9836	.9765	.7950	6	3	23.8340	57.7060
39.452	86.7980	.9859	.9798	.8101	6	3	24.1280	58.0500
41.451	99.4827	.9830	.9777	.8366	6	3	18.7400	47.7750
61.323	110.3826	.9910	.9928	.5599	6	3	24.1630	59.8100
62.006	124.0156	.9910	.9928	.5599	6	3	24.4320	59.6130
62.661	137.8512	.9910	.9928	.5599	6	3	24.6890	55.1870
63.267	151.8395	.9926	.9941	.5250	6	3	25.6990	55.1740
99.522	218.9381	.9920	.9920	.2401	6	3	61.7350	72.1160
103.346	206.6927	.9920	.9920	.2401	6	3	64.1100	81.1210
108.495	195.2934	.9920	.9920	.2401	6	3	67.3040	85.1630
159.831	79.9169	.9589	.9574	.1497	6	3	109.4800	139.6100
257.573	128.7880	.8421	.8470	1.3642	3	3	1275.2000	1802.0000
275.588	137.7942	.8421	.8470	1.3642	3	3	1364.4000	1928.0000
300.454	150.2246	.8421	.8470	1.3642	3	3	1487.5000	2102.0000

Station 1, cont'd.

## ESTIMATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RY
.027	.0479	.5539	1	125	28.9990	25.0410	1468.0000	4.4765	3.3379
.032	.0922	.4862	1	125	37.9590	32.0280	2466.7000	11.0710	7.8817
.041	.0893	.5308	1	125	35.3130	30.0810	2151.9000	10.1260	7.3480
.043	.0868	.5966	1	125	31.9260	27.4550	1773.0000	8.8462	6.5419
.059	.1407	.3249	2	125	24.0840	14.7770	798.3900	6.8023	2.5606
.064	.1419	.3299	2	120	21.9670	12.2840	633.4500	6.2236	1.9460
.072	.1447	.4150	2	120	20.2390	11.4320	540.3200	5.9254	1.8904
.083	.1500	.5454	2	125	18.7950	11.6430	488.8400	5.8863	2.2589
11.657	27.9775	.4791	3	110	1.1026	2.1028	5.6375	2.8342	10.3090
61.323	110.3826	.5599	3	110	.4894	2.2606	5.3500	2.9381	62.6790
62.008	124.0156	.5599	3	110	.4894	2.2606	5.3500	2.9709	63.3780
62.661	137.8512	.5599	3	110	.4894	2.2606	5.3500	3.0021	64.0440
63.267	151.8395	.5250	3	110	.4672	2.2355	5.2158	2.7615	63.2360
69.522	218.9381	.2401	3	105	.3245	2.0765	4.4173	2.0454	85.8250
103.346	206.6927	.2401	3	105	.3245	2.0765	4.4173	2.1760	89.1260
108.495	195.2934	.2401	3	105	.3245	2.0765	4.4173	2.2844	93.5670
154.431	73.9169	.1497	3	105	.3204	2.1157	4.5788	3.2821	143.0800

Station 1, cont'd.

JU

## EQUIVALENT APPARENT RESISTIVITIES

REF ID	BANDWIDTH	EX PRED EX	EY PRED EY	SKEWNESS	POINTS IN BY	QUALITY	APPARENT RX	APPARENT RY
C25	.6604	.58265	-6878	-8307	355	3	5.0019	6.3293
.026	.0562	.6643	-7356	-2975	381	2	21.3716	9.8086
.026	.0521	.6693	-7700	-3307	411	2	17.7040	11.8460
.027	.0479	.6917	-7822	-3696	947	2	17.9750	17.7750
C28	.0922	.6338	-6411	-9414	232	2	29.7950	20.1850
C41	.0893	.6724	-7028	1.0465	240	2	27.0210	21.3570
C42	.0868	.6594	-7060	1.0891	247	2	21.6770	19.1740
C47	.0848	.5765	-7164	-8951	252	2	12.6830	19.1700
C54	.1407	.5157	-7624	-4874	153	2	4.2249	19.1370
C64	.1419	.5298	-7778	-4626	151	3	3.9946	18.7550
D72	.1447	.5532	-7968	-4643	148	3	4.1394	18.8970
.083	.1500	.5658	-7967	-4881	145	3	4.1392	19.2710
C89	.2148	.6643	-8007	-7001	100	2	10.0700	20.5750
C102	.2253	.7934	-8069	-8669	96	2	12.7170	18.1650
C121	.2411	.7255	-7612	-8616	90	2	14.2190	17.3060
C137	.3278	.7397	-7441	-7787	66	2	15.7580	16.0560
C147	.2653	.7385	-7324	-7965	81	2	17.0910	15.0670
C161	.3579	.7412	-7234	-8394	60	2	18.6250	15.3540
C201	.4018	.7162	-6720	-7075	54	2	21.9740	13.0000
C298	.5004	.7051	-6638	-6703	45	2	23.0810	12.6370
C258	.5698	.6986	-6167	-5949	39	2	25.0530	11.7070
C261	.4687	.6687	-6224	-6291	46	2	25.6940	11.2110
C318	.6670	.7618	-5881	-4889	28	2	29.5290	9.7260
C325	.6697	.6603	-5555	-9040	32	2	29.6650	8.7865
C410	.9027	.6210	-5230	-3520	24	2	26.4840	7.9067
C461	.8305	.5984	-4600	-3152	27	2	25.6610	7.3829
C486	.11657	.5900	-4427	-2710	20	2	25.3810	7.7522
C558	.11161	.6121	-4443	-3392	20	2	27.7310	6.3025
C604	.1498	.7110	-6813	-9078	355	1	19.6100	6.4016
C614	.13498	.7474	-7174	-3883	361	1	21.9480	7.3455
C625	.12498	.7991	-7512	-4160	411	1	23.0410	7.8005
C638	.12498	.7991	-6462	-7643	3975	1	23.3440	7.8567
C652	.4337	.6100	-4254	-2421	16	3	29.5330	7.0169
C741	.17793	.5739	-4240	-4900	13	3	32.1920	4.0391
C816	.14693	.5321	-3659	-6937	16	3	35.2800	4.7893
C922	.22128	.8449	-6125	-4666	232	3	37.0960	10.0220
C930	.14602	.6602	-4695	-2560	4678	1	33.0630	10.1440
C974	.21436	.8359	-7853	-4405	240	3	31.1880	9.8085
C1035	.22770	.4920	-3544	-4529	11	3	34.4530	9.8701
C1041	.20820	.8505	-7461	-3551	247	3	32.1920	4.0391
C1130	.20343	.8324	-6810	-4807	252	3	35.2800	4.7893
C1132	.21757	.4563	-4051	-4615	469	3	37.0960	10.0220
C1147	.23775	.6262	-7031	-4794	153	2	34.6530	10.3350
C1144	.25946	.4904	-3467	-2668	153	2	36.2550	3.3980
C1156	.34048	.6167	-6651	-4814	151	2	47.8910	9.9454
C1158	.31004	.5004	-3378	-2495	8	3	39.3200	3.7377
C1164	.26165	.5344	-3225	-2071	6	3	35.7580	3.3725
C1172	.41451	.4604	-3288	-3233	6	3	43.5460	3.5410
C11736	.24716	.7952	-6824	-5010	148	2	52.0610	9.7572
C11949	.35491	.7670	-6652	-5914	145	2	53.1260	3.7160
C11946	.35496	.7646	-6746	-6209	100	2	56.4750	8.9766
C11948	.31549	.7646	-7231	-6384	96	2	55.8910	8.0834
C11950	.54077	.6205	-4205	-1715	3672	5	38.2000	3.6368
C11955	.45992	.6643	-4626	-1715	3672	5	38.6260	3.6774
C11958	.51674	.51674	-2605	-2605	3672	5	39.0320	3.7160
C12161	.67438	.2605	-2605	-1715	3672	5	31.2160	3.7746
C1236	.63267	.2605	-2605	-1715	3672	5	31.2160	3.7746
C1293	.57460	.2773	-2047	-3074	3074	4	69.6990	7.9800
C1278	.76664	.7096	-6172	-8336	90	2	63.3240	6.4220
C1278	.74678	.7200	-5929	-6281	66	2	61.5670	6.4460

Station 2

3.904	8.5889	.6843	.6407	1.0163	60	60.6200	6.9241
4.147	9.1224	.2737	.3642	.7342	29	21.5160	2.9573
4.306	8.6125	.2737	.3642	.7342	46	22.3430	3.0711
4.521	8.1374	.2737	.3642	.7342	59	23.4570	3.2241
4.822	9.6432	.5800	.6387	1.1984	28	60.2650	7.1182
5.004	12.0093	.5531	.6330	1.2457	33	59.8600	6.8685
6.200	13.6407	.5745	.5693	1.0149	24	51.6890	6.1093
6.259	11.2658	.5770	.5924	1.1596	3	54.0800	6.0877
6.660	3.3298	.2759	.3521	.7570	6	34.6050	4.7768
7.634	18.3298	.6359	.5808	.9903	6	59.1270	4.8548
8.036	16.0725	.6586	.5850	.9666	6	63.0650	5.2469
9.847	21.6647	.6758	.5562	.8783	3	95.8750	7.2792
10.732	5.3662	.5302	.3577	.6789	3	67.3760	10.4080
11.073	19.9318	.6604	.5738	1.0739	27	75.9000	5.8546
11.423	5.7415	.5302	.3577	.6789	3	72.0880	11.1360
11.657	27.9775	.6709	.5728	1.0527	20	77.7970	5.8183
12.519	6.2594	.5302	.3577	.6789	3	78.5900	12.1400
13.394	26.7874	.6798	.6346	1.0552	20	61.0580	11.8640
15.640	34.4080	.6746	.7368	1.4911	16	61.0870	17.2240
17.793	42.7022	.6947	.7745	2.0005	13	61.8090	24.4950
19.591	36.2638	.7209	.6652	1.9399	16	60.0690	39.0550
22.323	44.6449	.7430	.7063	2.1408	12	71.5900	41.1100
24.840	54.6478	.7563	.6701	3.1317	11	120.1400	66.0080
27.157	65.1763	.8103	.6913	3.3745	9	147.1500	67.5360
34.661	62.3908	.8473	.7076	5.8631	9	150.6700	61.3830
37.205	74.4103	.8523	.7167	5.9031	8	158.7200	64.3750
39.452	86.7980	.8867	.7481	5.7211	8	152.2100	56.8610
41.451	99.4827	.8563	.7348	5.9584	8	133.6000	47.5700
61.323	110.3826	.8793	.8941	11.2990	8	60.2040	36.8930
62.006	124.0156	.8793	.8941	11.2990	8	60.8750	37.3050
62.661	137.8512	.8793	.8941	11.2990	8	61.5150	37.6970
63.267	151.8395	.8718	.9045	14.1610	8	60.5350	36.4580
69.522	218.9361	.8715	.9480	1.9859	8	53.4360	44.1820
102.346	206.6927	.8715	.9480	1.9859	8	55.4920	45.8810
108.495	195.2934	.8715	.9480	1.9859	8	58.2570	48.1670
149.831	79.9164	.8443	.9240	1.9864	8	91.6700	74.4750
257.573	128.7880	.9276	.9741	1.3255	3	948.3700	244.5800
274.588	137.7942	.9276	.9741	1.3255	3	1014.7000	261.6900
290.454	150.2246	.9276	.9741	1.3255	3	1106.2000	285.2900

Station 2, cont'd.

## VITATED DIFFERENCE AND APPARENT RESISTIVITY DATA

DEPTH	SEGMENT	SEGMENT	SKEWNESS	QUALITY	ROTATE ANG	ZX	ZY	ZMAX	RX	RY
124	.0562	.2975	2	133	45.5560	23.8140	2642.5000	10.6110	2.8995	
126	.0521	.3307	2	138	40.8810	29.3060	2530.1000	8.7031	4.4723	
127	.0479	.3696	2	138	38.6730	38.5270	2980.0000	7.9614	7.9015	
129	.1407	.4874	3	153	5.8952	31.4330	1022.8000	.4076	11.5860	
134	.1419	.4626	3	153	5.5868	30.2610	946.9100	.4025	11.8100	
132	.1447	.4643	3	153	5.5700	29.3140	890.3400	.4486	12.4300	
138	.1500	.4841	3	153	6.0064	27.2060	776.2500	.6011	12.3330	
139	.5684	.5969	2	138	14.9370	7.5328	279.8500	11.5280	2.9318	
138	.7638	.4889	3	138	14.3030	5.9795	240.3300	13.0200	2.2756	
136	.6697	.4040	3	138	14.0230	5.3104	224.8600	13.1700	1.8885	
410	.9027	.3520	3	143	11.5280	4.5452	153.5500	10.9050	1.6953	
361	.8305	.3152	3	138	10.9200	3.6859	132.8300	11.0030	1.2536	
476	.11657	.2710	3	138	10.3980	3.4570	121.4800	10.5020	1.2991	
653	.11161	.3392	3	143	9.7914	3.0598	105.2300	10.7010	1.0450	
603	.14498	.4078	2	143	8.6486	4.6606	96.5200	9.0367	2.6292	
613	.13498	.3833	2	143	9.9411	4.9912	114.0500	10.9370	3.0569	
625	.12498	.4186	2	143	10.2760	5.3262	133.9600	13.1970	3.5454	
639	.11498	.3975	2	143	10.9660	5.4731	150.2100	15.3640	3.8269	
652	.14337	.3421	3	143	8.7870	2.7528	84.7890	10.0630	.9876	
741	.17793	.4900	3	143	7.5264	2.3925	62.3710	8.3991	.8487	
514	.14693	.4937	3	143	7.0799	1.6890	52.9770	8.1833	.4657	
522	2.2128	.4466	1	143	11.0750	5.5990	154.0100	22.6180	5.7858	
930	.18602	.4678	3	138	6.7439	1.5189	47.7880	8.4605	.4292	
974	.2.1438	.4405	2	143	10.8910	5.2415	146.0900	23.1170	5.3541	
1.035	.2.2770	.4529	3	138	7.4365	1.6303	57.9600	11.4480	.5502	
1.041	.2.0830	.4351	2	143	10.9050	4.7836	141.8100	24.7730	.7665	
1.120	.2.0343	.4.807	2	143	10.5800	4.6744	133.7800	25.2990	.9.9384	
1.177	.3.3775	.4794	2	138	10.3910	3.9293	123.4200	30.3910	.4.3453	
1.174	.2.5996	.2668	3	138	6.6553	1.2298	45.8050	12.7940	.4.3649	
1.174	.3.4048	.4814	2	138	10.3320	3.6116	119.7890	33.0390	.0.0373	
1.174	.3.1004	.2495	3	133	6.7951	1.2138	47.6470	14.3160	.4568	
1.172	.3.6164	.2071	3	133	6.7332	1.0231	46.3830	14.9050	.3441	
1.172	.4.1451	.3233	3	133	5.9188	1.0078	36.0480	12.1010	.3508	
1.734	.2.4716	.5010	2	138	9.8318	3.4539	108.5900	33.5580	.4.1414	
1.498	.3.5991	.5984	2	138	9.0014	2.9945	89.9920	32.4020	.5.6550	
2.455	.4.5992	.3672	3	128	2.6912	.2132	7.2877	3.7010	.0272	
2.455	.6.1674	.3672	3	128	2.6912	.2132	7.2877	3.7423	.0275	
2.634	.6.7438	.3672	3	128	2.6912	.2132	7.2877	3.7816	.0237	
2.634	.6.3267	.3074	3	128	2.5623	.2259	6.8165	3.4614	.0264	

Station 2, cont'd.

#### NON ROTATED SEPARATE ACTIVITIES

### Station 3

4.361	2.1805	.7249	.9627	.4337	2	163.8300	104.8100
4.616	2.6330	.4494	.5933	.6491	3	1222.0000	2676.5000
4.992	11.9957	.4655	.6047	.7066	22	3	1356.8000
4.193	17.6253	.4494	.5647	.5688	20	3	1056.6000
5.252	11.2532	.4561	.5702	.5439	24	3	1030.8000
7.072	3.5362	.7044	.9440	2.1014	3	3	86.7810
7.629	18.3093	.4490	.5593	.4438	15	3	789.9500
8.027	16.0542	.4376	.5557	.4214	17	3	649.0200
8.837	21.6403	.4236	.5394	.4659	12	3	476.5500
11.061	19.9092	.4176	.4853	.4068	14	3	465.1600
11.644	27.9455	.4136	.4766	.4692	10	3	489.6900
13.379	26.7573	.4287	.4868	.7356	10	3	587.4300
15.623	34.3702	.4087	.4073	.7075	9	3	568.4200
17.772	42.6548	.3804	.3627	.5527	7	3	626.2900
19.569	25.2237	.3390	.3278	.3214	8	3	676.6600
22.298	44.5951	.3795	.3803	.2469	7	3	742.2500
24.812	54.5881	.4613	.4137	.3618	6	3	576.7800
27.127	65.1042	.4689	.4271	.3773	5	3	646.2300
34.422	62.3208	.5883	.6057	.4205	5	3	1015.4000
37.162	74.3273	.6112	.6240	.4685	4	2	980.4200
39.407	86.7002	.6143	.6320	.4877	3	2	1087.8000
41.403	99.3641	.6220	.6465	.1971	4	2	952.4900
61.246	110.2584	.6210	.6170	.7493	3	2	1942.0000
49.072	43.5421	.5400	.5281	.6631	5	3	3265.5000
101.996	50.9970	.5400	.5281	.6631	5	3	3361.0000
104.592	52.2985	.5213	.5053	.7674	4	3	3304.2000
169.677	64.8104	.5612	.5469	2.1591	3	2	6762.1000
							9196.3000

Station 3, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	PANWIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	R1	R2
.025	.0504	.2061	1	119	9.6683	12.8190	257.8002	.4703	.8268
.036	.0562	.2289	1	121	11.9560	13.8750	335.4400	.7305	.9838
.074	.0520	.2015	1	120	15.3460	14.7040	451.8700	1.2258	1.1262
.027	.0479	.2307	1	122	21.6990	18.4200	810.1500	2.5051	1.8053
.072	.0922	.4185	1	121	31.4480	23.4020	1536.6000	7.5950	4.2057
.041	.0843	.4319	1	121	28.9850	23.8120	1407.1000	6.8187	4.6020
.043	.0867	.4549	1	121	27.7470	24.1050	1350.9000	6.6786	5.0457
.042	.0847	.4189	1	122	26.4400	23.1650	1235.7000	6.5804	5.0512
.059	.1407	.5014	1	121	24.7720	22.6130	1125.0000	7.1926	5.9936
.064	.1418	.5579	2	121	22.9620	20.0930	931.0000	6.7969	5.2042
.072	.1445	.5067	2	122	21.8510	18.4520	817.9500	6.9035	4.9225
.082	.1499	.4752	2	122	21.4920	17.0300	751.9100	7.6926	4.8301
.089	.2147	.4539	2	123	21.0960	16.4990	717.2700	7.9621	4.8702
.102	.2252	.5060	2	122	21.7400	17.9270	794.0200	9.6764	6.5794
.120	.2410	.4152	2	121	22.7100	17.1600	810.2000	12.4280	7.0954
.137	.3277	.3806	2	122	22.9630	16.1360	856.2300	14.3990	8.9817
.147	.2652	.3369	2	123	22.5190	18.7210	857.5600	14.9420	10.3270
.163	.3577	.2973	2	122	22.6450	18.6110	859.1800	16.6750	11.2630
.201	.4016	.3654	2	123	22.4760	18.1170	833.3900	20.2880	13.1820
.203	.5002	.3750	2	123	22.1320	18.0770	816.6400	20.4160	13.6200
.258	.5481	.4076	2	122	22.7190	15.9880	771.7800	26.6560	13.2010
.281	.4692	.4545	2	122	22.0730	16.0650	745.3000	25.3990	13.4540
4.132	2.0654	.5819	2	113	4.6617	11.0140	143.0400	17.9560	100.2500
4.253	2.1263	.5619	2	113	4.6617	11.0140	143.0400	18.4830	103.1800
4.361	2.1825	.4337	2	110	2.8999	10.8470	126.0600	7.3346	102.6200
6.103	13.6253	.5684	3	109	8.4017	30.6470	1009.8000	87.4350	1163.4000
6.252	11.2932	.5439	3	109	8.0113	30.2080	976.7100	80.2480	1141.0000
7.624	18.3293	.4438	3	108	6.0192	27.1370	772.6500	55.2800	1123.6000
8.027	16.0342	.4214	3	108	4.9256	24.8780	643.2000	39.0010	993.6200
9.037	21.6403	.4654	3	107	2.9380	18.4520	349.1300	16.9810	669.8500
11.061	19.4092	.4068	3	104	2.6486	12.7440	169.4300	15.5160	359.2800
11.644	27.3455	.4647	3	104	2.2246	11.6440	140.5400	11.5250	315.7700
17.772	42.6544	.5527	3	104	3.9028	9.6047	107.4800	54.1420	327.9100
19.563	38.2237	.3214	3	105	3.1556	8.2993	78.8370	38.9740	269.5800
22.298	44.4451	.2469	3	102	3.0458	9.4412	92.4130	41.3710	337.5000
24.812	54.5841	.2616	2	100	2.3960	6.8925	53.2470	28.4690	235.7400
27.127	45.1043	.3773	2	99	2.3881	7.0540	56.4620	30.9410	269.4600
34.622	62.3205	.4705	3	108	6.3607	5.2309	67.8210	280.1600	184.4700
37.162	74.3273	.4686	2	109	6.1842	5.0040	63.2840	284.2500	186.1100
39.407	86.7002	.4577	2	108	6.0949	4.8359	60.5340	292.7800	184.3200
41.403	99.3641	1.971	2	104	6.3518	5.3477	75.7150	274.0900	292.8000

Station 3, cont'd.

## NON-PETITATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PRED EX	EY PRED EY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RX	APPARENT RY
.025	.0604	.8168	.8281	.1481	355	2	1.0364	2.0989
.026	.0562	.8579	.8728	.1232	381	2	1.2922	2.7314
.026	.0521	.8893	.9073	.1219	411	1	1.7883	3.7186
.027	.0479	.9085	.9207	.1498	447	2	2.9042	6.7709
.034	.0922	.8779	.8875	.1766	232	1	8.9653	16.1840
.041	.0893	.8395	.9047	.3666	240	1	7.5567	13.9980
.043	.0868	.8650	.9115	.2891	247	1	7.3716	13.0670
.047	.0848	.8762	.9141	.2672	252	1	7.2052	12.8760
.059	.1407	.9295	.9488	.2618	153	1	7.2513	12.3920
.064	.1419	.9528	.9403	.1873	151	1	7.2929	12.1970
.072	.1447	.9594	.9438	.2341	148	1	7.4845	12.5240
.083	.1500	.9617	.9491	.2709	144	1	7.9961	13.8100
.089	.2148	.9627	.9463	.3337	100	1	8.1774	14.7630
.122	.2253	.9747	.9732	.4855	96	1	8.8006	15.3920
.121	.2411	.9779	.9788	.5276	90	1	10.2510	17.9020
.137	.3278	.9811	.9805	.5354	66	1	11.6090	19.9520
.147	.2653	.9761	.9788	.5705	81	1	12.1890	21.2130
.162	.3579	.9742	.9793	.6530	60	1	12.9330	23.3780
.201	.4018	.9639	.9726	.7542	54	1	14.1320	26.6590
.298	.5004	.9654	.9739	.7229	44	1	14.2770	27.1940
.258	.5684	.9566	.9710	.7035	39	1	16.2540	32.2190
.261	.4694	.9575	.9709	.6897	46	1	16.0340	32.6650
.318	.7638	.9582	.9746	.6121	28	2	17.2250	38.7050
.335	.6697	.9617	.9773	.6009	33	1	17.0930	38.6630
.410	.9027	.9545	.9838	.5447	24	1	18.1460	43.9190
.461	.8305	.9571	.9838	.4724	27	1	17.9190	47.5800
.446	1.1657	.9563	.9834	.4791	20	1	18.6230	44.8210
.558	1.1161	.9557	.9831	.4912	20	1	18.5770	54.9110
.604	1.4498	.9061	.9189	.3382	355	1	15.2860	50.1270
.614	1.3498	.9381	.9359	.3351	381	1	15.8180	53.1820
.625	1.2498	.9568	.9513	.3666	411	1	16.2650	56.8400
.639	1.1498	.9718	.9615	.3839	497	1	15.9870	57.6500
.652	1.4337	.9603	.9816	.4035	16	1	18.7750	61.5240
.741	1.7793	.9585	.9833	.3094	13	1	19.6650	66.4700
.816	1.4693	.9403	.9845	.3291	16	1	20.5010	72.8820
.922	2.2128	.9824	.9668	.4110	232	1	19.5850	81.9470
.930	1.8602	.9314	.9858	.3230	12	1	22.4290	79.9260
.974	2.1438	.9808	.9634	.5086	240	1	19.6700	83.3060
1.075	2.2770	.9270	.9843	.3365	11	1	23.2030	86.1190
1.041	2.0830	.9798	.9641	.3934	247	1	19.8990	91.2060
1.130	2.0343	.9787	.9668	.3975	252	1	20.1790	99.0070
1.122	2.7157	.9315	.9871	.3618	9	1	23.6770	92.5680
1.467	3.3775	.9837	.9724	.4089	153	1	22.4920	120.9750
1.444	2.5996	.9097	.9869	.3592	9	1	25.3670	123.3400
1.542	3.4048	.9832	.9773	.3997	151	1	23.0670	130.3300
1.550	3.1004	.9095	.9872	.3646	8	1	27.0460	132.4000
1.644	3.6165	.9016	.9878	.3597	6	1	26.0350	141.2500
1.727	4.1451	.7493	.9874	.3841	6	2	44.3320	147.2300
1.736	3.4716	.9797	.9798	.4220	148	1	23.6500	134.4800
1.999	3.5991	.9523	.9823	.4462	144	1	26.2400	155.7700
2.148	5.1549	.9565	.9846	.4624	100	1	26.5450	164.0000
2.452	5.4077	.7627	.9858	.4744	96	2	44.8260	178.3100
2.555	4.5992	.4701	.9737	.5260	5	3	187.8400	195.7800
2.584	5.1674	.4701	.9737	.5260	5	3	189.9400	197.9600
2.611	5.7438	.4701	.9737	.5260	5	3	191.9300	200.0400
2.636	6.3267	.4542	.9730	.6023	4	3	221.6300	196.8400
2.843	5.7860	.7318	.9857	.4887	90	2	51.4750	198.4500
3.273	7.8684	.6628	.9858	.4941	66	2	60.8270	212.1500
3.532	6.3674	.7126	.9849	.5106	61	2	55.7820	221.1500

Station 3A

3.904	8.5689	.8991	.9841	.5287	60	2	33.2820	236.2400
4.147	9.1224	.4828	.9749	.3763	44	33	103.0100	261.8300
4.306	6.6125	.4828	.9749	.3763	44	33	106.9700	271.9000
4.521	8.1374	.4828	.9749	.3763	44	33	112.3000	285.4500
4.822	9.6432	.9319	.9793	.6115	54	22	29.3160	253.8800
5.004	12.0093	.9384	.9795	.4285	44	22	29.2390	257.2300
6.200	13.6407	.9350	.9690	.6815	39	22	29.0250	280.3100
6.259	11.2658	.9357	.9663	.6716	46	22	29.0460	280.0000
6.660	3.3298	.4782	.9728	.3725	6	33	166.5200	421.8500
7.638	18.3298	.9380	.9573	.7343	28	33	30.0760	314.3900
8.036	16.0725	.9316	.9487	.7409	33	33	29.0040	304.2300
9.847	21.6647	.8927	.9173	.8482	24	33	31.2250	320.0800
10.732	5.3662	.1739	.9286	.3798	3	33	157.6400	668.2500
11.073	19.9318	.8295	.8774	.9033	27	33	24.4740	301.5200
11.483	5.7415	.1739	.9286	.3798	3	33	168.6600	714.9900
11.657	27.9775	.8072	.8525	.9270	20	33	24.5530	301.3300
12.519	6.2594	.1739	.9286	.3798	3	33	183.8800	779.4800
13.394	26.7874	.7599	.8636	.9434	20	22	19.1920	336.6300
15.640	34.4080	.8209	.8703	.9916	16	22	18.7600	384.3300
17.792	42.7022	.8315	.8851	.9239	13	22	18.5930	427.8400
19.591	35.2634	.9088	.9385	1.0893	16	22	18.1620	586.0300
22.323	44.6449	.9136	.9485	1.2553	12	33	19.3480	584.7800
24.840	54.6476	.9315	.9487	1.3228	11	33	19.4510	623.9300
27.157	65.1763	.9407	.9551	1.3714	9	33	20.1590	705.3700
34.661	62.3908	.9202	.9459	1.5495	9	33	19.5870	477.2300
37.205	74.9103	.9209	.9480	1.4999	8	33	20.1770	487.6900
39.452	86.7980	.9207	.9477	1.5793	6	33	20.7090	487.8000
41.451	99.4827	.9393	.9656	1.7113	6	33	18.5740	497.5300
61.323	110.3826	.9799	.9853	1.0936	55	33	13.3220	598.2800
62.008	124.9156	.9799	.9853	1.0936	55	33	13.4710	604.9600
62.661	137.8512	.9799	.9853	1.0936	55	33	13.6120	611.3200
63.267	151.8395	.9804	.9862	1.1255	44	33	13.7340	621.2100
69.522	218.9381	.9695	.9844	1.4395	44	33	16.1470	708.9200
102.346	206.6927	.9695	.9844	1.4395	44	33	16.7680	736.1400
108.495	195.2934	.9695	.9844	1.4395	44	33	17.6040	772.8700
147.871	79.9169	.9546	.9708	1.3963	66	33	27.1090	1188.2000
257.573	128.7880	.8100	.8409	.6700	33	33	144.4000	8844.8000
275.588	137.7942	.8100	.8409	.6700	33	33	154.5000	9463.4000
700.454	150.2246	.8100	.8409	.6700	33	33	168.4400	10317.6000

Station 3A, cont'd.

## ESTIMATED IMPEDANCE AND APPARENT RESISTIVITY DATA

FEEDING	BANDWIDTH	SIZELNESS	QUALITY	ROTATN ANG	ZMAX	ZMIN
0.25	.6604	-1.481	2	245	16.1200	2Y
.026	.0562	-1.222	2	245	19.1670	
.025	.0521	-1.219	1	245	17.1230	23.1340
.027	.0479	-1.498	2	245	21.8090	31.0160
.028	.0922	-1.766	1	245	30.1650	39.1950
.041	.0893	-1.366	1	245	25.0150	35.5000
.043	.0868	-1.267	1	245	21.6000	25.9400
.047	.0848	-1.2672	1	245	21.1610	25.8050
.052	.0747	-1.2618	1	245	22.2890	29.4420
.064	.1419	-1.1873	1	245	20.190	27.7190
.072	.1447	-2.241	1	245	22.2470	26.5260
.083	.1500	-2.709	1	245	21.6000	25.9400
.049	.2148	-2.337	1	245	21.1610	25.8050
.102	.2253	-9.255	1	245	20.4410	25.4440
.241	.5276	-5.276	1	245	20.2410	25.5510
.137	.3218	-5.154	1	245	20.3400	25.4890
.147	.2653	-5.705	1	245	20.0300	25.1810
.410	.9027	-5.847	1	245	1.9.5700	21.1580
.461	.8705	-6.724	1	245	1.13.6320	20.9710
.486	.11657	-6.741	1	245	1.13.5140	21.0220
.553	.1161	-6.412	1	245	1.12.6510	20.4550
.608	.14498	-3.282	1	245	10.2450	17.8960
.618	.13948	-3.251	1	245	10.6960	18.6390
.625	.12498	-3.666	1	245	10.9520	19.3500
.639	.1498	-3.829	1	245	11.0170	19.4840
.652	.14217	-4.025	1	245	11.8080	20.2450
.741	.17743	-3.044	1	245	11.3120	20.0520
.816	.14992	-3.291	1	245	10.7910	19.8420
.922	.21228	-9.110	1	245	10.2600	19.9870
.930	.16602	-3.230	1	245	10.4200	19.4610
.974	.21436	-9.086	1	245	9.9792	19.8230
1.074	.2770	-3.265	1	245	10.0170	19.6210
1.091	.2.0830	-3.934	1	245	9.6374	19.9520
1.110	.2.0737	-3.975	1	245	9.2680	19.9460
1.172	.2.7157	-3.616	1	245	9.5406	19.5260
1.180	.1.407	-3.775	1	245	8.8004	19.9980
2.596	.1.5946	-3.592	1	245	8.5635	19.9060
2.448	.1.0404	-3.997	1	245	8.5012	19.9770
2.850	.1.1004	-3.646	1	245	8.5399	19.9650
2.648	.1.648	-3.597	1	245	8.3639	20.0090
2.727	.1.1451	-3.691	1	245	8.5057	19.9910
2.754	.1.407	-3.755	1	245	8.0631	19.8190
2.596	.1.992	-4.962	1	245	7.6751	19.7350
2.149	.1.5449	-4.624	1	245	7.4357	19.6380
2.459	.5.9077	-4.744	1	245	7.433	19.5320
2.548	.1.1715	-3.616	1	245	6.1317	18.6750
2.592	.1.5992	-5.260	1	245	9.0492	18.7430
2.484	.1.674	-5.167	1	245	9.0492	18.7430
2.611	.5.7438	-5.260	1	245	9.0692	18.7430
2.692	.5.991	-5.7860	1	245	6.7891	19.2210
2.149	.1.5449	-4.624	1	245	6.4430	19.0210
2.459	.5.9077	-4.744	1	245	6.1317	18.6750
2.548	.1.1715	-3.616	1	245	5.6237	18.4360
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3052	17.4460
2.149	.1.5449	-4.624	1	245	5.9867	18.0590
2.459	.5.9077	-4.744	1	245	5.9867	18.0590
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1	245	5.3311	17.4530
2.149	.1.5449	-4.624	1	245	5.3311	17.4530
2.459	.5.9077	-4.744	1	245	5.3311	17.4530
2.548	.1.1715	-3.616	1	245	5.3311	17.4530
2.592	.1.5992	-5.260	1	245	5.3311	17.4530
2.484	.1.674	-5.167	1	245	5.3311	17.4530
2.611	.5.7438	-5.260	1	245	5.3311	17.4530
2.692	.5.991	-5.7860	1			

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EY PRED EY	EV PRED EV	SKINNESS	POINTS IN BW	QUALITY	APPARENT RX	APPARENT RY
.025	.0604	.7648	.6690	.2103	355	3	-1.421	.3019
.026	.0562	.8361	.7924	.2611	381	3	-.1622	.3393
.026	.0521	.8690	.8609	.3133	911	2	.2363	.4265
.027	.0479	.8667	.8995	.2445	947	2	-.4143	.7734
.038	.0922	.7481	.8164	.1742	232	3	1.3115	2.4662
C.41	.0893	.8506	.8693	.1745	240	3	1.1802	2.2342
.043	.0868	.8400	.8803	.2580	247	3	1.1316	2.1371
.047	.0618	.8609	.8293	.3290	252	2	1.1013	2.0939
C.59	.1407	.9213	.9526	.5136	153	3	1.0085	2.0677
.064	.1419	.9442	.9156	.9349	151	1	1.0089	2.2167
.072	.1447	.9488	.9121	.5406	148	1	1.0688	2.4015
.083	.1500	.9512	.9047	.7554	144	1	1.2481	2.4886
.089	.1548	.9501	.8806	.8419	100	1	1.3628	2.8336
.102	.2253	.9645	.9645	.9564	96	1	1.9445	3.1670
.121	.2411	.9710	.9418	.9197	90	1	2.5372	3.9762
.137	.3278	.9752	.9632	.1602	66	3	3.0416	4.8696
.147	.2653	.9488	.9564	.1385	81	3	3.3233	5.5132
.163	.3579	.9628	.9511	.1205	60	1	3.4264	6.5463
.201	.4010	.9426	.9191	.9504	54	1	4.4008	9.4315
.208	.5004	.9450	.9192	.1759	14	1	4.6555	9.9686
.258	.6489	.9238	.8955	.2332	39	1	5.2992	11.7120
.261	.9694	.9308	.8908	.7676	46	1	5.2919	11.7749
.318	.7626	.9269	.8795	.0652	28	1	5.5693	12.7500
.335	.6697	.9258	.8665	.5527	23	1	5.7191	13.1590
.410	.9027	.9217	.8213	.6142	24	1	6.4895	14.9720
.461	.8205	.9043	.7643	.9699	27	1	6.1604	12.6560
.486	.11657	.9137	.7575	.7624	20	1	6.7695	12.4330
.558	.11641	.8902	.7609	.5551	20	1	6.4366	14.0190
.604	.14980	.0321	.0492	.7676	178	1	9.9425	
.613	.13991	.0275	.0496	.4511	191	1	2.1373	.9701
.625	.12492	.0255	.0466	.2028	206	1	.2277	1.0107
.638	.11492	.0267	.0465	.3114	224	1	.2432	1.0578
.652	.14337	.9037	.7605	.6017	216	1	.7983	14.4910
.741	.17793	.9088	.7754	.6336	13	1	.5555	15.2340
.816	.16693	.0641	.6696	.1612	16	10.1210	16.3450	
.922	.21217	.1876	.2920	.7493	117	1	.2107	2.9457
.930	.18602	.8597	.5790	.6910	12	13.1030	15.3920	
.974	.21427	.9172	.2691	.7122	121	2	.8132	2.4869
1.035	.22710	.8527	.6237	.9216	11	12.9160	16.3500	
1.041	.20819	.3815	.2947	.8290	124	3.4933	1.8173	
1.130	.20313	.9480	.3662	.9504	127	1	.6757	1.9690
1.132	.27157	.8419	.6079	.7804	9	13.3640	14.3660	
1.407	.3158	.5342	.4026	.9474	77	5.9735	2.1275	
1.498	.24466	.9172	.7720	.6506	874	7.7470	10.8890	
1.547	.34031	.8527	.6237	.9216	9	5.0554	2.2091	
1.550	.21550	.0819	.7718	.3037	8	8.0424	10.9590	
1.644	.26165	.7616	.7194	.1456	6	7.1031	10.5550	
1.727	.41451	.8038	.7274	.4063	6	6.9803	11.1010	
1.735	.34694	.5342	.3736	.0312	75	3	5.0625	2.4976
1.963	.35974	.3220	.3916	.2655	76	4.7273	2.4781	
2.147	.51525	.4706	.3180	.9353	50	4.7351	2.6284	
2.457	.54056	.4603	.3632	.2679	98	1	5.3666	2.9551
2.555	.45992	.8070	.7960	.0750	5	8.5515	15.0590	
2.584	.51674	.8070	.7960	.0750	5	6.6466	15.2270	
2.611	.51748	.8070	.7960	.0750	5	8.7377	15.3870	
2.436	.63267	.8353	.8365	.6239	4	10.8320	17.9550	
2.892	.52314	.5423	.3611	.8651	45	6.2336	3.1170	
3.277	.73641	.5602	.3271	.6449	24	7.2667	3.1152	
3.516	.61646	.5210	.2757	.5423	41	7.4585	2.4554	

Station 4

8.5844	5.978	1939	3.4943
2.992	9.1224	7.5931	11.6734
4.147	6.6125	7.5931	11.0730
4.356	8.1374	7.5931	11.4990
4.521	6.6100	7.808	12.0720
4.819	9.6386	7.859	13.4520
5.02	12.0014	1.1746	4.1068
6.197	12.6340	1.639	10.2570
6.256	11.1260*	1.694	14.6160
6.660	2.1260*	1.600	15.6860
7.634	2.1260*	1.632	10.8930
8.032	18.1211	1.661	11.5660
9.843	16.0645	1.8182	11.5660
10.732	16.0645	1.9358	11.5660
11.668	19.4219	1.9701	11.5660
11.483	5.7415	1.9701	11.5660
11.651	5.922	1.9701	11.5660
12.519	27.9639	1.9733	10.9095
13.387	6.2594	1.9722	11.8038
15.633	26.1745	1.9708	12.1525
17.784	34.2914	1.9684	12.0876
19.581	92.6821	1.9666	12.0876
22.312	35.2973	1.9647	12.0876
24.828	44.6229	1.9595	12.0876
27.144	54.6209	1.9573	12.0876
34.658	65.1466	1.9646	12.0876
37.186	62.3597	1.9627	12.0876
39.432	74.3716	1.9684	12.0876
41.230	66.7528	1.9696	12.0876
41.293	99.4332	1.9499	12.0876
42.167	110.3290	1.8672	12.0876
42.565	51.0308	1.7729	12.0876
42.716	52.3214	1.7612	12.0876
44.860	1.4102	1.7913	12.0876

Station 4, cont'd.

## ESTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERCENT THICKNESS	PERCENT THICKNESS	QUALITY	ROTATION ANG	ZX	ZY	ZMAX	RX	RY
.025	.0604	70	9.7771	45.4420	11.49	-11.39		
.026	.0564	70	5.5331	6.0182	56.8340	-18.52	.1565	
.026	.0562	3	6.6795	7.3211	98.2140	-27.91	.2323	
.026	.0521	2	6.6795	7.3211	98.2140	-27.91	.2323	
.027	.0479	2	8.6149	10.2130	178.5100	-39.51	.5552	
.028	.0422	70	11.7400	13.2800	314.2000	1.0590	1.3551	
.041	.0693	70	11.7030	13.5720	321.1600	1.1122	1.4957	
.043	.0868	3	11.1330	12.9900	292.6900	1.0757	1.9646	
.047	.0848	2	10.5240	12.3700	263.5600	1.0430	1.4411	
.059	.1407	70	10.1510	11.9320	245.4300	1.2085	1.6697	
.064	.1419	75	9.7958	10.9810	216.3300	1.2376	1.5550	
.072	.1497	3	9.5840	10.6780	205.8700	1.3287	1.6492	
.613	.3491	55	.0250	.1341	.0186	.0001	.0022	
.625	.2492	3028	.0300	.1288	.0175	.0001	.0021	
.639	.1492	3114	.0235	.1619	.0159	.0001	.0045	
2.576	6.3646	60	.5210	.4980	3.8853	2.5792	-16.6*	
3.902	8.5646	75	1.9048	.9680	3.8533	2.8386	-16.82	
4.819	9.1846	65	1.8497	.9642	3.5637	3.2978	-13.72	
5.002	12.0034	65	1.9693	.3246	3.9836	3.8793	-16.54	

Station 4, cont'd.

## PERIOD APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PREC EX	EY PREC EY	SKINNESS	POINTS IN BW	QUALITY	APPARENT RX
0.25	.0604	.7060	.7223	-7.962	355	2	-22.95
0.26	.0562	.8055	.8196	-7.552	381	1	-26.90
0.26	.0521	.8710	.8827	-7.096	411	1	-39.21
0.27	.0479	.9208	.9147	-6.717	497	1	-55.75
0.28	.0422	.8716	.7957	-8.364	232	2	-6.623
0.41	.0893	.8850	.8610	-8.731	240	1	-8.6648
0.42	.0868	.9038	.8956	-9.523	247	1	-1.5747
0.47	.0848	.9147	.9141	-1.0168	252	1	-1.4371
0.59	.1407	.9610	.9724	1.1041	153	1	1.4595
0.64	.1419	.9719	.9418	1.2335	151	1	1.5426
0.72	.1447	.9751	.9426	1.3737	148	1	1.7006
0.83	.1500	.9635	.8893	1.0591	154	1	1.5490
0.89	.2148	.9639	.8693	1.0166	100	1	1.7649
1.02	.2253	.9656	.9019	1.0144	96	1	1.6293
1.12	.2411	.9569	.8716	1.0779	90	1	1.4093
1.37	.3278	.9500	.8568	1.9687	66	2	1.7082
1.47	.2653	.9470	.8512	1.8894	81	2	1.4175
1.63	.3579	.9445	.8146	1.7654	60	1	1.3147
2.01	.4018	.9451	.8191	1.6310	51	1	1.9237
2.08	.5004	.9571	.8641	1.9177	45	1	2.5175
2.58	.5684	.8871	.8526	1.9604	39	1	3.0534
2.61	.4694	.8608	.8293	1.5664	46	1	3.5257
3.18	.7638	.8064	.7753	2.0972	28	2	2.7230
3.25	.6697	.6130	.7712	1.7371	33	2	1.8752
4.10	.9027	.6340	.7656	1.7526	24	2	1.4899
4.61	.8305	.8363	.7703	1.7539	27	2	3.4899
4.26	.1.1657	.9064	.7803	1.7164	20	2	3.6966
5.54	.1.1161	.9202	.7539	1.6734	20	2	3.6814
6.04	.1.4490	.3387	.2813	1.1633	178	3	3.7026
6.13	.1.3491	.4177	.3847	1.1725	191	3	3.7477
6.25	.1.2492	.4435	.3946	1.0933	206	3	3.8568
6.38	.1.1492	.5809	.4751	1.0706	224	3	2.7958
6.52	.1.4337	.9218	.7063	1.806	16	2	5.6066
7.41	.1.7793	.8925	.6929	1.6611	13	2	2.7398
8.16	.1.9693	.8613	.6811	1.5580	16	2	6.6054
9.22	.2.2117	.8095	.6649	1.5574	117	2	2.7525
9.30	.1.8602	.6641	.6470	1.5404	12	2	6.6054
9.74	.2.1427	.5621	.5673	2.0113	121	3	1.4093
1.05	.2.2770	.8453	.6533	1.5492	11	2	2.8227
1.54	.2.0819	.5605	.5424	1.7465	124	3	6.3602
1.130	.2.0333	.5692	.5493	1.5496	127	3	2.5806
1.12	.2.7157	.8492	.6408	1.9806	9	2	1.1569
1.07	.2.3756	.6663	.5606	1.4289	77	3	1.0006
1.44	.2.5496	.7519	.5119	1.4394	9	3	2.2861
1.57	.2.4031	.7763	.6183	1.5266	76	3	1.3441
1.50	.3.1004	.7194	.5070	1.4304	8	3	1.2514
1.64	.2.6165	.7056	.4626	1.3789	6	3	1.2722
1.72	.4.1451	.6649	.4734	1.360	6	3	1.2609
1.75	.3.4699	.7921	.5986	1.460	75	3	1.1917
1.97	.3.5974	.7837	.5573	1.3529	72	3	2.0054
2.14	.5.1525	.7651	.5001	1.2986	50	3	1.3860
2.95	.5.9048	.7822	.5178	1.3134	48	3	1.1786
2.55	.4.5792	.6293	.5674	1.6039	5	3	0.9890
2.56	.5.1674	.6293	.5874	1.6039	55	3	0.9445
2.61	.5.7438	.6293	.5874	1.6039	55	3	0.9247
2.65	.6.3267	.5644	.5602	1.6111	4	3	0.9344
2.92	.5.7839	.7290	.7552	1.3390	45	3	0.9274
2.77	.7.8641	.7167	.4844	1.3813	34	3	0.9001
3.6	.6.3644	.5220	.5220	1.3237	34	3	0.9147

Station 5

6.584	6.982	7.716
4.142	9.124	6.5473
4.206	8.6125	6.7992
4.521	8.1374	7.1379
4.819	9.6386	5.9852
5.002	12.0034	6.0373
6.197	13.6340	6.200
6.256	11.2604	6.2741
6.660	3.3298	5.242
7.634	18.3211	7.152
8.032	16.0645	6.769
9.842	21.6539	7.861
10.732	5.3662	7.294
11.068	19.9219	9.151
11.463	5.7415	7.294
11.651	27.9634	9.010
12.519	6.2594	7.294
13.187	26.7745	9.472
15.621	3.914	9.481
17.764	42.6821	9.528
19.581	35.2473	9.788
22.312	84.6229	9.826
24.828	54.6209	9.902
27.144	45.1466	9.910
34.644	62.1547	9.689
37.186	74.3716	9.751
24.432	86.1528	9.813
41.470	49.9122	9.705
61.293	110.3240	9.790
49.167	49.580	9.304
102.062	51.0308	9.104
104.665	52.3214	8.630
163.736	49.8660	6.274

Station 5, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATE ANG
.652	1.4337	-5.806	2	120
.816	1.4693	-5.580	2	119
.922	2.2117	-5.574	2	119
.930	1.8602	-5.906	2	119
1.035	2.2707	-5.992	2	120
1.132	2.7157	-4.808	2	121
1.444	2.5996	-4.394	2	121
1.547	2.4031	-4.264	2	120
1.550	3.104	-4.304	2	121
1.644	3.6145	-3.789	2	120
1.727	4.1451	-4.360	2	118
1.725	4.669	-4.640	2	115
1.999	3.5974	-3.529	2	114
2.147	5.1525	-2.988	2	115
2.457	5.4048	-3.134	2	114
2.892	5.7834	-3.390	2	116
3.277	7.8641	-3.813	2	117
3.526	6.3646	-4.337	2	116
4.192	8.5844	-3.744	2	116
4.819	9.6366	-2.864	2	119
5.002	12.0034	-2.798	2	119
6.197	13.6340	-1.062	1	119
6.256	11.2604	-1.445	1	120
7.634	18.3211	-2.184	1	122
8.032	16.0645	-5.846	1	130
10.712	5.3662	-5.659	1	145
11.463	5.7415	-5.659	1	145
12.519	6.2519	-5.659	1	145
17.784	42.6821	-5.110	1	132
19.581	35.2473	-2.094	1	131
22.312	44.6229	-2.746	1	128
24.828	54.6209	-3.494	1	129
27.144	65.1466	-3.677	1	129
34.644	62.3597	-9.503	1	129
37.186	74.3716	-9.187	1	129
39.412	86.7528	-9.939	1	128
10.4665	52.3314	.5655	1	122

Station 5, cont'd.

## NON-ROTTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EY PRED EY	EY PRED EY	SKINNESS	POINTS IN SW	QUALITY	APPARENT RES	APPARENT AV
.025	.0604	-3277	-5414	-2796	355	3	2239	5945
.026	.0562	-9655	-6722	-2400	381	3	2564	5773
.027	.0521	-6056	-7864	-2581	411	2	2975	6673
.028	.0479	-7236	-6696	-2226	447	2	4752	1.0414
.029	.0422	-9191	-7676	-1352	232	2	1.1999	2.5506
.030	.0383	-7731	-8984	-0967	240	1	1.0619	2.1515
.031	.0343	-1500	-7956	-5094	148	2	8146	1.6542
.032	.0303	-7790	-9007	-1187	247	2	9120	2.0264
.033	.0269	-8407	-7863	-9056	1640	2	8467	1.9726
.034	.0233	-1407	-8323	-9341	2514	1	9032	1.8063
.035	.0192	-1419	-7930	-9203	4081	1	8166	1.6224
.036	.0147	-1447	-7904	-9334	4596	2	8146	1.6542
.037	.0103	-1500	-7956	-5094	147	2	8880	1.7593
.038	.0068	-2148	-7824	-9250	5486	1	8589	1.7994
.039	.0039	-2148	-7253	-9350	5300	1	9953	2.2637
.040	.0021	-2253	-8372	-9224	5576	1	1.0835	2.3558
.041	.0012	-2411	-8288	-9111	4519	1	1.0983	3.3214
.042	.0007	-3278	-8062	-9111	66	1	8036	3.1649
.043	.0003	-147	-2653	-6933	5783	1	8336	3.2800
.044	.0001	-1500	-3579	-6061	6347	1	6753	3.3461
.045	.0001	-163	-7634	-7634	60	2	5785	2.2639
.046	.0001	-201	-4018	-5581	7212	1	9762	4.7991
.047	.0001	-209	-5004	-5324	7096	1	8945	8.9462
.048	.0001	-258	-5684	-6161	7810	1	1.3905	6.4209
.049	.0001	-261	-4694	-5857	7625	1	2.2194	9.4193
.050	.0001	-318	-6736	-6730	3376	2	1.856	2.2113
.051	.0001	-319	-3579	-6061	7267	2	3513	3.3748
.052	.0001	-410	-9027	-9027	9527	1	6232	1.1423
.053	.0001	-461	-3059	-8094	958	1	1.1821	1.1423
.054	.0001	-484	-11657	-8116	8772	1	2.2782	7.6604
.055	.0001	-546	-11464	-82649	7792	1	2.3762	8.2599
.056	.0001	-605	-11464	-8023	8503	1	2.195	9.4193
.057	.0001	-605	-4490	-1197	3321	1	1.856	2.2113
.058	.0001	-613	-3491	-1467	3398	1	3513	3.3748
.059	.0001	-625	-2292	-2449	9886	1	6232	1.1423
.060	.0001	-638	-1492	-3520	1523	1	1.1821	1.1423
.061	.0001	-692	-937	-7980	8001	1	2.2782	7.6604
.062	.0001	-741	-7793	-7792	7792	1	2.3762	8.2599
.063	.0001	-814	-4693	-7739	6845	1	2.195	9.4193
.064	.0001	-814	-922	-7774	3605	1	1.856	2.2113
.065	.0001	-922	-1602	-7961	6495	1	3513	3.3748
.066	.0001	-930	-2427	-2999	3974	1	6232	1.1423
.067	.0001	-974	-22770	-7870	7008	1	1.1821	1.1423
.068	.0001	-1014	-20419	-3497	4953	1	2.2782	7.6604
.069	.0001	-1041	-1104	-20332	4771	1	2.3762	8.2599
.070	.0001	-1132	-27147	-7677	6930	1	2.195	9.4193
.071	.0001	-1132	-2758	-9475	4731	1	1.856	2.2113
.072	.0001	-1132	-1427	-2974	2083	1	3513	3.3748
.073	.0001	-1132	-22770	-7870	9037	1	6232	1.1423
.074	.0001	-1132	-20419	-3497	4953	1	1.1821	1.1423
.075	.0001	-1132	-1104	-20332	4771	1	2.2782	7.6604
.076	.0001	-1132	-27147	-7677	6930	1	2.3762	8.2599
.077	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.078	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.079	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.080	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.081	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.082	.0001	-1132	-27147	-7677	6930	1	2.2782	7.6604
.083	.0001	-1132	-2758	-9475	4731	1	2.3762	8.2599
.084	.0001	-1132	-1427	-2974	2083	1	2.195	9.4193
.085	.0001	-1132	-22770	-7870	9037	1	1.856	2.2113
.086	.0001	-1132	-20419	-3497	4953	1	3513	3.3748
.087	.0001	-1132	-1104	-20332	4771	1	6232	1.1423
.088	.0001	-1132	-27147	-7677	6930	1	1.1821	1.1423
.089	.0001	-1132	-2758	-9475	4731	1	2.2782	7.6604
.090	.0001	-1132	-1427	-2974	2083	1	2.3762	8.2599
.091	.0001	-1132	-22770	-7870	9037	1	2.195	9.4193
.092	.0001	-1132	-20419	-3497	4953	1	1.856	2.2113
.093	.0001	-1132	-1104	-20332	4771	1	3513	3.3748
.094	.0001	-1132	-27147	-7677	6930	1	6232	1.1423
.095	.0001	-1132	-2758	-9475	4731	1	1.1821	1.1423
.096	.0001	-1132	-1427	-2974	2083	1	2.2782	7.6604
.097	.0001	-1132	-22770	-7870	9037	1	2.3762	8.2599
.098	.0001	-1132	-20419	-3497	4953	1	2.195	9.4193
.099	.0001	-1132	-1104	-20332	4771	1	1.856	2.2113
.100	.0001	-1132	-27147	-7677	6930	1	3513	3.3748
.101	.0001	-1132	-2758	-9475	4731	1	6232	1.1423
.102	.0001	-1132	-1427	-2974	2083	1	1.1821	1.1423
.103	.0001	-1132	-22770	-7870	9037	1	2.2782	7.6604
.104	.0001	-1132	-20419	-3497	4953	1	2.3762	8.2599
.105	.0001	-1132	-1104	-20332	4771	1	2.195	9.4193
.106	.0001	-1132	-27147	-7677	6930	1	1.856	2.2113
.107	.0001	-1132	-2758	-9475	4731	1	3513	3.3748
.108	.0001	-1132	-1427	-2974	2083	1	6232	1.1423
.109	.0001	-1132	-22770	-7870	9037	1	1.1821	1.1423
.110	.0001	-1132	-20419	-3497	4953	1	2.2782	7.6604
.111	.0001	-1132	-1104	-20332	4771	1	2.3762	8.2599
.112	.0001	-1132	-27147	-7677	6930	1	2.195	9.4193
.113	.0001	-1132	-2758	-9475	4731	1	1.856	2.2113
.114	.0001	-1132	-1427	-2974	2083	1	3513	3.3748
.115	.0001	-1132	-22770	-7870	9037	1	6232	1.1423
.116	.0001	-1132	-20419	-3497	4953	1	1.1821	1.1423
.117	.0001	-1132	-1104	-20332	4771	1	2.2782	7.6604
.118	.0001	-1132	-27147	-7677	6930	1	2.3762	8.2599
.119	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.120	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.121	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.122	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.123	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.124	.0001	-1132	-27147	-7677	6930	1	2.2782	7.6604
.125	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.126	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.127	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.128	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.129	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.130	.0001	-1132	-27147	-7677	6930	1	2.2782	7.6604
.131	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.132	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.133	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.134	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.135	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.136	.0001	-1132	-27147	-7677	6930	1	2.2782	7.6604
.137	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.138	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.139	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.140	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.141	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.142	.0001	-1132	-27147	-7677	6930	1	2.2782	7.6604
.143	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.144	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.145	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.146	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.147	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.148	.0001	-1132	-27147	-7677	6930	1	2.2782	7.6604
.149	.0001	-1132	-2758	-9475	4731	1	2.195	9.4193
.150	.0001	-1132	-1427	-2974	2083	1	1.856	2.2113
.151	.0001	-1132	-22770	-7870	9037	1	3513	3.3748
.152	.0001	-1132	-20419	-3497	4953	1	6232	1.1423
.153	.0001	-1132	-1104	-20332	4771	1	1.1821	1.1423
.154	.0001	-1132	-27147	-7677	6930	1		

**Station 6, cont'd.**

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKINNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RY
.029	.0604	.2746	3	230	2.2376	5.4225	34.4110	.0252	.1480
.026	.0562	.2400	3	230	3.4176	6.6365	55.7230	.0597	.2252
.026	.0521	.2581	2	230	4.2469	8.4380	94.6930	.1223	.3708
.027	.0479	.2226	2	230	7.2760	11.2520	179.5500	.2818	.6740
.028	.0922	.1352	2	230	10.2630	15.3410	340.6700	.8093	1.8081
.041	.0891	.0967	2	230	9.4870	13.5770	274.3300	.7309	1.4966
.043	.0368	.1187	2	230	8.5736	12.6850	234.4200	.6380	1.3966
.047	.0846	.1640	2	230	8.1678	11.8480	207.0900	.6283	1.3220
.059	.1407	.2514	1	230	7.8823	10.3160	168.5600	.7286	1.2481
.064	.1419	.4081	2	230	6.7784	9.2857	132.1700	.5926	1.1120
.072	.1447	.4576	2	230	6.3771	8.8755	119.4400	.5883	1.1395
.083	.1500	.5094	2	230	6.2170	8.5343	111.4800	.6440	1.2134
.089	.2196	.5486	2	230	5.7930	8.2702	101.9600	.6007	1.2243
.102	.2253	.5100	1	230	6.2022	8.4057	109.1200	.7879	1.4473
.121	.2911	.5576	1	230	5.9241	8.3104	104.1600	.8461	1.6650
.137	.3278	.4519	1	230	5.4811	6.3355	99.5240	.8208	1.8982
.147	.2693	.5783	2	230	4.1711	7.5232	73.9960	.5129	1.6685
.258	.5687	.5445	2	230	3.0945	7.2681	62.4000	.4948	2.7294
.261	.4694	.5842	3	230	2.8693	7.2373	60.6120	.4294	2.7319
.318	.7638	.3356	2	230	3.5845	7.6716	71.7020	.8178	3.7458
.335	.6697	.2787	2	230	3.8940	7.6942	74.3640	1.0155	3.9646
.410	.9027	.1265	1	230	4.7435	7.7310	82.2700	1.8465	4.9046
.461	.8305	.2920	1	230	4.4657	7.1049	70.4230	1.8403	4.6582
.486	1.1697	.0331	1	230	4.5940	7.1877	72.7670	2.0502	5.0187
.558	1.1161	.2412	1	230	4.0034	6.9104	63.7810	1.7888	5.3300
.638	1.1492	.3657	3	225	4.9773	4.981	1.2032	.1220	.0117
.652	1.4337	.3313	2	230	3.8049	6.3264	54.5000	1.8869	5.2164
.741	1.7793	.3721	2	230	3.4540	5.8729	46.4210	1.7689	5.1140
1.444	2.5996	.5521	2	230	2.9499	4.8087	31.8260	2.5135	6.1791
1.550	3.1004	.4743	2	230	3.0160	4.8261	32.3880	2.8203	7.2213
1.644	3.8165	.4150	2	230	2.8413	4.9048	32.1300	2.6541	7.9043
104.665	52.3314	.5112	3	205	.7347	.0999	.5498	11.3000	2087
149.736	84.8680	.5295	3	190	.9670	.1674	.9630	31.7460	4611

Station 6, cont'd.

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EY PREDESI	EY PREDESI	APPARENT RESISTIVITIES
		POINTS IN ROW	QUALITY	STRENGTH
.025	.0604	.5542	.6791	.0641 178
.026	.0562	.6466	.8215	.0771 191
.026	.0520	.7406	.6840	.0765 204
.027	.0479	.8266	.9062	.1247 224
.038	.0122	.8636	.7893	.2808 117
.041	.0893	.8970	.8481	.1911 121
.043	.0867	.9000	.6735	.1249 124
.047	.0847	.8498	.8895	.1410 105
.059	.1407	.9321	.9470	.1901 77
.064	.1416	.9484	.9585	.2291 76
.072	.1426	.9555	.9670	.2259 75
.083	.1469	.9597	.9666	.2451 75
.084	.1247	.9626	.9715	.3070 50
.102	.2252	.9694	.9705	.3608 48
.120	.2410	.9733	.9689	.3633 95
.137	.3277	.9773	.9721	.3813 34
.147	.2652	.9622	.9672	.4572 41
.163	.2577	.9531	.9638	.5177 31
.201	.4016	.9218	.9435	.6091 28
.208	.5002	.9157	.9382	.5734 22
.258	.5581	.8475	.8862	.5577 20
.261	.4692	.8148	.8760	.6779 24
.318	.7634	.4188	.8433	.3708 15
.335	.6693	.5155	.8569	.3684 17
.410	.9023	.4491	.8288	.2651 12
.461	.8301	.5207	.8147	.4807 14
.485	.11651	.5265	.8254	.4703 10
.558	.11156	.6079	.8281	.7443 10
.605	.14490	.1583	.1712	.8805 178
.613	.13491	.1826	.1944	.1048 191
.625	.12492	.2423	.2614	.1491 206
.638	.14492	.3124	.3487	.1489 224
.651	.14320	.6484	.8101	.0359 9
.74	.17784	.6384	.8105	.7563 7
.816	.4686	.6046	.8289	.6578 8
.922	.2117	.6619	.8047	.0637 117
.920	.18593	.6027	.8177	.1170 7
.974	.21427	.6394	.7458	.12851 121
1.015	.22759	.6189	.8332	.6752 6
1.04	.20819	.6315	.7641	.1118 124
1.10	.20311	.6448	.7920	.0420 127
1.13	.27144	.6768	.8482	.6402 5
1.407	.32758	.6393	.7993	.9748 77
1.444	.25983	.6570	.8319	.7432 5
1.547	.24031	.6557	.8384	.6332 76
1.549	.30949	.6673	.8225	.6692 4
1.643	.26147	.6829	.7891	.0420 122
1.726	.14310	.7316	.7101	.7101 3
1.753	.36999	.6575	.8544	.7618 2
1.943	.35978	.6557	.8241	.9262 75
2.147	.51525	.6557	.8384	.6117 72
2.457	.40148	.6692	.8130	.9549 50
2.454	.54971	.6688	.8057	.9156 48
2.692	.57874	.6821	.8081	.8753 3
3.277	.76641	.6669	.8004	.8986 45
3.536	.62646	.6696	.7860	.6495 34
3.492	.85444	.6735	.8130	.8159 41
4.132	.20553	.6767	.8751	.8113 31
4.243	.12663	.7817	.8420	.8020 5

Station 7

Station 7, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKINNESS	QUALITY	ROTATION ANG
.025	.060	.0641	3	85
.026	.0562	.0471	2	85
.026	.0520	.0765	2	85
.027	.0479	.1267	1	85
.038	.0922	.2808	2	84
.041	.0893	.1911	1	86
.043	.0867	.1410	1	86
.047	.0847	.1059	1	86
.059	.1407	.1901	1	87
.068	.1418	.2291	1	86
.072	.1496	.2259	2	86
.083	.1499	.2451	1	87
.089	.2147	.3070	2	87
.102	.2252	.3608	2	88
.120	.2410	.3633	2	88
.131	.3277	.3813	2	88
.147	.2652	.4572	2	88
.163	.3577	.5177	2	89
.206	.5002	.5734	2	89
.258	.5681	.5577	2	88
.318	.7634	.3708	2	91
.335	.6693	.3684	3	94
.410	.9023	.2651	3	95
.461	.8301	.4807	3	96
.485	.11651	.4703	3	96
1.69	7.36	84.8680	4.948	95

Station 7, cont'd.

## ACTIVATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PRED EY	EY PRED EX	SKEWNESS	POINTS IN SW	QUALITY	APPARENT RI	APPARENT RY
.025	.604	.8024	.9029	.3843	178	2	.8453	.8453
.026	.562	.8868	.9107	.3942	191	1	.6035	.6035
.027	.520	.8735	.9307	.3769	206	1	.8298	.8298
.028	.479	.9066	.9379	.3769	224	1	1.2273	1.2273
.041	.0922	.8394	.8897	.2631	117	1	3.3342	2.7133
.042	.0893	.8707	.9175	.3844	121	1	5.5C11	6.1642
.043	.0867	.8825	.9267	.4925	124	1	3.2136	5.5C11
.047	.0847	.8861	.9305	.6005	127	1	3.0587	5.0238
.054	.1407	.9285	.9583	.7825	98	2	2.7867	4.5812
.064	.1418	.9381	.9655	.8468	95	2	2.6433	4.1732
.072	.1446	.8832	.8777	.6001	76	1	2.5188	4.0334
.083	.1499	.7497	.8313	.6001	75	1	2.2884	3.8517
.089	.2147	.7177	.8671	.2088	72	2	1.7205	3.6120
.102	.2252	.7348	.8649	.3593	50	2	1.5285	3.5776
.120	.2410	.7859	.8951	.6502	98	2	1.5082	3.5833
.137	.3277	.8684	.9377	.6414	95	2	1.9116	4.3158
.147	.2652	.8865	.9461	.5253	39	1	2.7355	5.4484
.163	.3577	.9222	.9657	.5598	41	1	2.9999	5.9216
.201	.4016	.8857	.9528	.5008	31	1	3.5379	6.8550
.202	.5002	.8911	.9533	.5055	28	1	4.0007	6.4246
.258	.5681	.8496	.9450	.4297	22	1	8.0609	8.5517
.261	.4692	.8514	.9507	.4267	24	1	4.8317	5.7127
.318	.7634	.8370	.9577	.4038	15	1	4.6942	4.7805
.375	.6693	.8346	.9566	.4024	17	1	4.5949	4.12725
.410	.9023	.8361	.9543	.3783	12	1	4.6858	12.4190
.461	.8201	.7782	.9113	.4479	14	2	5.2333	13.2580
.495	.1651	.7858	.9115	.5065	10	2	6.1117	13.6360
.558	.1156	.7590	.8652	.9813	10	2	6.1213	14.8080
.608	.14490	.0810	.11234	.4788	178	3	14.0555	10.1013
.613	.1381	.1302	.1699	.1219	191	1	.0921	.1433
.625	.12492	.1492	.1699	.2268	5288	2	.1352	.2422
.638	.1492	.1814	.1814	.1890	9856	2	.1668	.3765
.651	.1210	.7514	.7514	.9731	5243	9	7.0026	16.8250
.741	.1784	.7638	.7638	.8822	5162	7	7.4033	18.8450
.744	.2146	.4686	.7638	.4220	6	1	7.1289	18.7570
.922	.2.2117	.3655	.3357	.7109	117	3	.5318	.64460
.929	.1.6593	.8083	.8952	.5256	7	1	8.3215	20.1310
.974	.2.1427	.3201	.3210	.4820	121	3	.5322	.7634
.975	.2.2759	.8252	.8981	.4690	6	1	8.1211	22.1320
1.041	.2.0619	.9267	.3238	.15462	124	3	.5643	.8529
1.130	.2.0112	.9256	.3261	.1.2118	127	3	.6986	.6218
1.131	.2.7144	.8257	.8983	.8214	5	1	8.5179	23.1270
1.167	.3.758	.4593	.2919	.9441	77	3	.8994	1.0454
1.174	.2.5982	.8769	.9032	.6403	5	2	9.3401	24.3510
1.194	.2.4649	.3021	.4618	.2807	76	3	1.1214	1.1382
1.199	.3.974	.9618	.3238	.1.2118	72	3	1.5153	1.0273
1.549	.3.988	.8912	.9082	.8719	4	1	10.3210	.9766
1.643	.6.147	.8643	.9020	.7154	3	2	9.5259	25.0980
1.726	.1.430	.9034	.9053	.7447	4	1	10.2310	23.9670
1.735	.2.4649	.5557	.2668	.9859	75	3	2.3120	25.3110
1.989	.3.974	.3690	.2254	.9623	41	3	2.4549	1.1859
2.147	.5.1525	.2916	.2198	.1.3902	50	3	2.1340	.9167
2.457	.5.9048	.3200	.2254	.9127	48	3	2.0420	.9379
2.554	.4.5971	.9224	.9190	.1.0899	3	1	16.1640	.2880
2.692	.5.7824	.2912	.2322	.1.3172	45	3	2.3049	1.0884
2.77	.7.6641	.3219	.2377	.1.2523	34	3	2.4549	1.1859
2.836	.6.3646	.3333	.1885	.8315	41	3	2.1340	.9167
3.952	.3.5649	.3171	.1828	.8033	31	1	2.0126	.8225
4.132	.2.0659	.9052	.1.1139	.9178	5	1	2.6200	.6430
4.257	.2.1263	.9052	.1.1139	.9178	5	1	25.3400	.5930

Station 8

Station 8, cont'd.

APPENDIX C: RESISTANCE AND APPARENT RESISTIVITY DATA

STATION	DEPTH	SKEWNESS	QUALITY	ROTATE ANG	ZY	ZX	ZMAI	ZMAI	ZY	ZX	ZMAI	
8624	4029	2	200	6.2524	9.8074	12.0690	212.0466	.3367	1.3367	2.9262	.7464	
5562	3643	1	200	8.1169	10.5770	11.9150	227.9700	.3306	.5823	1.1579	2.0902	
5523	3942	1	195	12.2170	14.8200	15.5300	204.4500	.5675	.9294	2.2135	4.5423	
5473	3769	1	200	16.9780	24.3220	27.8500	248.7200	.8798	2.2835	4.2685	4.2685	
5922	2631	1	200	16.7730	22.7710	27.9870	271.6700	.7997	2.2835	4.2685	4.2685	
0843	3844	1	200	16.0890	21.3010	27.2960	204.4500	.130550	.9585	2.8382	2.8382	
0967	4925	1	200	7.5864	10.5770	11.9150	227.9700	.3347	.8185	2.8427	2.8427	
1443	2088	2	200	6.7495	12.6050	13.4520	232.7200	.0385	1.8503	4.9413	4.9413	
2147	3593	2	200	8.2316	13.4520	14.6380	212.8800	.8525	2.2835	4.2685	4.2685	
137	5353	1	200	8.5250	13.4520	14.6380	212.8800	.6560	2.2835	4.2685	4.2685	
2652	2652	1	200	6.9009	12.2460	12.2460	197.5800	.2460	2.1419	5.4802	5.4802	
4916	5008	1	200	8.7277	13.7460	13.7460	265.1200	.3092	3.0592	7.5987	7.5987	
207	5022	1	200	8.6792	13.6160	13.6160	260.7300	.1395	3.1395	7.7272	7.7272	
258	5681	1	200	8.1847	12.9140	12.9140	233.7500	.4596	3.4596	8.6124	8.6124	
241	4692	1	200	6.0385	12.9660	12.9660	232.7200	.7635	3.7635	8.7635	8.7635	
316	4638	1	200	7.3672	12.5940	12.5940	212.8800	.4528	10.0890	10.0890	10.0890	
763	6893	1	200	6.0244	10.1150	10.1150	197.5800	.1877	3.1877	10.9030	10.9030	
922	3783	1	200	6.1795	11.5240	11.5240	173.7800	.3508	3.3508	10.7380	10.7380	
9101	4479	2	200	5.7996	10.7900	10.7900	150.0600	.1023	3.1023	11.1200	11.1200	
11651	5565	2	200	6.1108	10.7020	10.7020	152.1200	.6496	3.6496	11.4130	11.4130	
11154	4833	2	200	5.4807	10.1150	10.1150	132.3400	.3510	3.3510	11.4130	11.4130	
114490	4788	3	185	0.080	10.089	10.089	101.42	.0014	-0.0014	-0.0014	-0.0014	
113214	3214	3	200	-1.127	-15.97	-15.97	-0.0323	-0.0016	-0.0016	-0.0016	-0.0016	
113214	3214	3	195	-1.658	-2.823	-2.823	-1072	-0.0034	-0.0034	-0.0034	-0.0034	
113214	3214	2	200	5.2658	9.8730	125.2100	3.6124	12.6920	12.6920	12.6920	12.6920	
113214	3214	2	200	5.1677	9.8746	123.6200	3.9576	14.0880	14.0880	14.0880	14.0880	
113214	3214	2	200	4.9903	9.2918	111.2400	4.6637	5.1784	15.5656	15.5656	15.5656	
113214	3214	2	200	5.2774	9.1494	111.5600	5.1784	5.3570	17.2445	17.2445	17.2445	
113214	3214	2	195	5.0834	9.1294	109.2400	5.3570	5.3570	17.8350	17.8350	17.8350	
113214	3214	2	195	4.9794	8.8795	103.6500	5.6097	6.4461	10.6717	10.6717	10.6717	
113214	3214	2	195	5.7110	0.8550	113.1100	3.1143	-0.0670	-0.0670	-0.0670	-0.0670	
113214	3214	2	200	6.6778	0.6866	-0.6866	-0.4507	-0.4461	-0.4461	-0.4461	-0.4461	
113214	3214	2	200	4.2556	1.1494	1.1494	-0.3146	-0.0548	-0.0990	-0.1227	-0.0990	
113214	3214	2	195	4.6910	1.0794	1.0794	-0.3045	-0.0122	-0.0399	-0.1174	-0.0602	
113214	3214	2	195	4.2144	1.0794	1.0794	-0.2001	-0.0225	-0.0405	-0.0611	-0.0611	
113214	3214	2	195	5.2622	1.0794	1.0794	-0.3453	-0.0880	-0.1276	-0.1916	-0.1916	
113214	3214	2	195	4.2556	1.0118	1.0118	-0.2073	-0.0265	-0.0726	-1.3447	-0.9846	
113214	3214	2	190	3.2867	2.0255	1.7128	1.1235	2.9514	6.4936	-0.2395	-0.2395	
113214	3214	2	190	1.3432	1.3432	1.5726	1.2397	2.5307	5.7634	-1.2258	-1.2258	
113214	3214	2	195	1.0794	1.0794	1.0794	-0.0112	-0.0112	-0.0399	-0.1174	-0.0602	
113214	3214	2	195	0.6000	0.6000	0.6000	-0.2001	-0.0225	-0.0405	-0.0611	-0.0611	
113214	3214	2	195	2.6444	2.6444	1.8265	0.8550	-0.1276	-0.1916	-0.1916	-0.1916	
113214	3214	2	195	6.2264	1.0118	1.0118	-0.2073	-0.0265	-0.0726	-1.3447	-0.9846	
113214	3214	2	190	1.0118	1.0118	1.7128	1.1235	2.9514	6.4936	-0.2395	-0.2395	
113214	3214	2	190	2.9556	2.9556	1.5726	1.2397	2.5307	5.7634	-1.2258	-1.2258	
113214	3214	2	195	1.5217	1.5217	2.7311	1.4257	7.6404	19.9710	-4.3443	-4.3443	
113214	3214	2	200	5.2710	3.1225	1.1053	1.1053	3.1225	10.9710	36.6780	36.6780	
113214	3214	2	200	3.8244	3.0645	1.2767	1.2767	1.2767	11.0210	36.7806	36.7806	
113214	3214	2	200	2.0556	2.8210	1.4084	1.4084	9.9414	35.5110	2.8512	2.8512	
113214	3214	2	205	2.5566	1.4146	1.4146	8.5851	8.5851	32.6946	9.9361	9.9361	9.9361
113214	3214	2	205	2.5439	1.4151	1.4151	8.4449	8.4449	35.1320	10.8720	10.8720	10.8720
113214	3214	2	205	2.2630	1.2145	1.2145	6.5963	6.5963	35.4840	10.2210	10.2210	10.2210
113214	3214	2	205	2.1015	1.2101	1.2101	5.8816	5.8816	32.8440	10.8440	10.8440	10.8440
113214	3214	2	205	1.8810	1.1807	1.1807	4.9321	4.9321	27.9030	10.9940	10.9940	10.9940
113214	3214	2	205	1.6276	1.0628	1.0628	3.7765	3.7765	21.9500	9.7454	9.7454	9.7454

Station 8, cont'd.

## NICKEL-ANTIMONIUM APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX. PRED. EY	EY. PRED. EY	SKEWNESS	POINTS IN SW	QUALITY	APPARENT RX	APPARENT RX
1.025	.0604	-2263	-7133	.8135	355	3	1.5346	.3277
1.026	.0562	-3277	-7254	1.0099	381	3	1.2623	.9483
1.027	.0521	-4555	-7469	1.1754	411	3	1.1431	.4466
1.028	.0479	-6862	-7785	1.3867	447	2	1.2235	1.2575
1.029	.0922	-6433	-5860	1.7666	232	3	9226	.6938
1.030	.0893	-7275	-6757	1.9099	210	2	1.2783	1.0840
1.031	.0868	-7507	-6974	2.0660	247	2	1.4344	1.2565
1.032	.0848	-7521	-7050	1.9707	252	2	1.4290	1.4290
1.033	.1407	-7331	-7147	1.5494	153	2	1.5319	1.7679
1.034	.1419	-4662	-3757	2.072	151	3	4614	.6117
1.035	.1447	-3871	-3859	5024	148	3	4079	.3466
1.036	.1500	-2887	-2431	1.4624	147	3	1775	.0873
1.037	.2148	-2754	-2146	1.4064	100	3	1649	.0887
1.038	.162	-2253	-1555	-1678	2.9266	96	0494	.0397
1.039	.121	-2411	-1646	-1834	2.9860	90	0415	.0485
1.040	.137	-3278	-1690	-1979	2.3904	66	0421	.0690
1.041	.147	-2653	-1866	-2074	2.7600	81	0525	.0996
1.042	.163	-3579	-2142	-2177	2.4036	60	0803	.2657
1.043	.201	-4018	-3147	-3016	2.5363	54	1791	.2969
1.044	.259	-5004	-3469	-3200	4.1873	47	2072	.3154
1.045	.258	-5684	-3511	-2254	2.1890	39	1547	.0945
1.046	.1657	-5019	-3804	-2489	2.3373	46	1476	.0881
1.047	.1161	-1.1161	-5225	-4115	2.7571	2.2054	1.195	.0551
1.048	.318	-7638	-4434	-4497	2.2054	28	1503	.0594
1.049	.335	-6697	-4434	-3026	2.1130	33	2404	.0425
1.050	.410	-9027	-4626	-4647	2.5143	24	3219	.1371
1.051	.461	-8205	-5111	-4072	2.9072	27	4622	.1793
1.052	.486	-1.1657	-5019	-3743	2.2888	20	9851	.2919
1.053	.558	-4694	-4490	-4095	2.7204	20	2428	.0871
1.054	.612	-1.2491	-4599	-3915	1.2878	178	1681	.1134
1.055	.625	-1.2492	-4570	-3741	1.8789	191	1747	.1257
1.056	.638	-1.1992	-4781	-4857	2.0445	206	1257	.1110
1.057	.652	-1.4337	-5507	-4760	1.6510	224	5520	.3575
1.058	.741	-1.7793	-5225	-4421	4.5197	16	6256	.9710
1.059	.816	-1.4693	-4599	-4703	1.1759	13	8237	.6061
1.060	.922	-2.2117	-4570	-4311	2.9794	117	1923	.1588
1.061	.915	-1.8602	-4919	-4955	4.6103	12	1.0405	.7441
1.062	.974	-2.1427	-3717	-3412	1.6967	121	1.404	.1594
1.063	1.515	-2.2770	-4812	-4377	1.7360	11	1.0899	.9066
1.064	1.541	-2.0819	-3137	-3757	1.2122	124	1039	.1995
1.065	1.139	-2.0333	-3239	-3239	1.3037	127	1.1862	.2143
1.066	1.132	-2.7157	-4867	-4967	1.3871	9	1.3281	.9743
1.067	1.977	-3.2758	-3555	-3802	1.4139	77	1.9779	.2594
1.068	1.444	-2.5496	-4589	-2864	7.7367	9	1.7203	.6400
1.069	1.547	-3.4CJ1	-3620	-3738	2.1077	76	1.723	.2562
1.070	1.555	-3.1004	-4299	-2430	6.6561	8	1.772	.6664
1.071	1.644	-2.6165	-3890	-2085	5.5201	6	2.0112	.6162
1.072	1.727	-4.9592	-4946	-2867	3377	6	1.6449	.5324
1.073	1.735	-3.9699	-4759	-4022	18.2960	75	1.4923	.4227
1.074	1.999	-3.5974	-4554	-3994	12.9970	72	1.9774	.4377
1.075	1.447	-6.1525	-4454	-3685	2.5071	50	3763	.2675
1.076	2.457	-5.5C48	-4642	-3916	8.0537	46	4274	.4417
1.077	2.556	-5.5992	-4118	-5112	5.112	5	1.6159	.3155
1.078	2.564	-5.1674	-4118	-2144	5.112	5	1.4921	.2914
1.079	2.611	-5.7438	-4118	-2144	5.112	5	1.9774	.3297
1.080	2.626	-6.3267	-4267	-3715	5.475	4	1.2550	.2444
1.081	2.692	-6.7834	-4622	-3741	12.5745	45	3297	.3274
1.082	2.277	-7.8641	-4502	-3817	7.0179	25	3166	.3570
1.083	2.536	-6.3646	-3593	-3166	7.7423	41	3570	.2444

Station 9

3.902	8.5844	.3270	.2868	6.0335	31	3	.3239	.2028
4.147	9.1224	.3310	.2683	1.0171	4	3	1.2390	.3856
4.306	8.6125	.3310	.2683	1.0171	4	3	1.2566	.4004
4.521	8.1374	.3310	.2683	1.0171	4	3	1.3507	.4204
4.819	9.6286	.2874	.2117	3.9505	28	3	.2575	.1295
5.002	12.0034	.3156	.1628	2.3104	22	3	.2359	.1002
4.197	13.6340	.2675	.3505	2.8956	20	3	.1669	.0919
4.256	11.2604	.2543	.2511	1.4143	24	3	.1504	.0877
4.660	3.3298	.3225	.2668	1.0484	6	3	2.0397	.6273
7.624	18.3211	.2095	.3410	2.0731	15	3	.2054	.0783
8.032	16.0645	.2529	.3508	.6661	17	3	.2284	.0553
9.843	21.6539	.3718	.2754	.2214	12	3	.2625	.0379
10.732	5.3662	.3682	.4336	6.7839	3	3	10.0020	.6294
11.066	19.9219	.4718	.3937	.3893	14	3	.4522	.0917
11.483	5.7415	.3682	.4336	6.7839	3	3	10.7020	.6734
11.651	27.9634	.4691	.4061	.3713	10	3	.4718	.0777
12.519	6.2594	.3682	.4336	6.7839	3	3	11.6670	.7342
12.587	26.7745	.4820	.3198	.4157	10	3	1.0324	.2443
15.632	34.3914	.4890	.4746	1.5643	9	3	2.5981	.3101
17.784	42.6821	.4957	.5776	1.5967	7	3	.7196	.5386
19.581	35.2473	.4379	.6006	4.0728	8	3	.9526	.8664
20.512	44.6229	.5302	.6397	1.9693	7	3	7.1965	.8199
24.228	54.6209	.6402	.7440	11.8110	6	2	5.0135	1.0877
27.144	65.1466	.6680	.8039	4.6859	5	2	6.1406	1.3322
24.644	62.3597	.5300	.3279	.2127	5	3	7.8933	.6662
27.186	74.3716	.5838	.4083	.3946	4	3	8.6307	.9619
19.432	86.7528	.5497	.3457	.6334	3	3	6.5649	.9414
41.430	99.4332	.5051	.4507	.4845	4	3	4.9238	.6961
41.297	110.3290	.5718	.5566	.5843	3	3	6.5318	.8244
99.187	49.5810	.5566	.5339	.6946	5	3	10.2070	1.4262
102.062	51.0308	.5566	.5339	.6946	5	3	10.5060	1.5303
104.665	52.3314	.6283	.5721	1.4145	4	3	9.5935	2.7161
144.724	84.8680	.8044	.6920	.9994	3	2	16.6950	5.1256

Station 9, cont'd.

## REFLECTIONS AND APPARENT REFLECTIVITY DATA

STATION	REFLECTION	QUALITY	ROTATHANG	ZI	ZY	ZMAX	RX
1418	2672	3	160	3.2429	3.6652	23.9510	-172.1
1418	5024	3	160	1.9548	1.8508	7.2467	-0.4956
1417	5291	3	155	.9103	.2148	0.553	-0.152
1416	5291	3	165	.6938	.3223	-5.8552	-0.354
1416	3377	3	165	.6303	.2119	-1663	-0.229
1416	5112	3	170	.6303	.2119	-2030	-0.229
1416	5112	3	170	.6303	.2119	-12053	-0.229
1416	5112	3	170	.6303	.2119	-4422	-0.229
1416	5112	3	170	.6303	.2119	-12053	-0.229
1416	5112	3	165	.5670	.2464	-2074	-0.229
1416	5475	3	165	.5670	.2464	-3822	-0.320
1416	3267	3	165	.5670	.2464	-1695	-0.320
1416	2214	3	140	.1333	.0285	-0.016	-0.0350
1416	2214	3	145	.0949	.0949	-0.169	-0.0601
1416	3493	3	145	.1648	.0949	-0.262	-0.0601
1416	3493	3	145	.1648	.0949	-0.342	-0.0601
1416	3713	3	145	.1628	.0876	-0.618	-0.176
1416	4157	3	155	.2606	.1035	-1818	-0.287
1416	4157	3	170	.5408	.1035	-0.786	-0.287
1416	2127	3	170	.1098	.1109	-3048	-0.852
1416	2127	3	170	.5799	.1109	-3482	-0.897
1416	3946	3	170	.1098	.1098	-2.5008	-0.897
1416	4445	3	170	.9263	.1011	-1.920	-1.5054
1416	5847	3	170	.9224	.0979	-2.4223	-1.175
1416	3230	3	170	.9224	.0979	-2.8526	-1.175

Station 9, cont'd.

## UNPREDICTED APPARENT RESISTIVITIES

EFFRIND	BANDWIDTH	EX PRED EX	EX PRED EX	PRED EY	APPARENT RI
.025	.0604	-4267	3804	1.1295	.355
.026	.0562	-4205	3889	1.0841	.381
.027	.0521	-5278	5095	1.2453	.411
.028	.0479	-5194	4976	1.1601	.447
C41	.0922	-6203	6825	1.5923	.232
C43	.0893	-5987	6447	1.4849	.240
C47	.0868	-4099	6401	1.2681	.257
C59	.0848	-6978	7332	1.6235	.252
C64	.1407	-7011	6881	1.3975	.153
C68	.1419	-6982	6585	1.2780	.151
C72	.1447	-7376	6572	1.5493	.148
C83	.1500	-8455	7298	1.9173	.144
C89	.2148	-7447	7114	2.2128	.100
C102	.2253	-8553	7054	2.4786	.96
C121	.2411	-8509	6045	2.7206	.90
C127	.3278	-7767	4371	2.5214	.66
C147	.6653	-6914	2933	2.6379	.81
C163	.3579	-6513	2166	2.5926	.60
C201	.4018	-2415	0816	1.7954	.54
C208	.5004	-2095	0888	1.6858	.44
C258	.5664	-3315	1688	2.5593	.39
C261	.4694	-2783	1346	1.6750	.46
C318	.7638	-2002	1488	1.9875	.28
C335	.6697	-1675	1572	1.0321	.23
C410	.9027	-0949	0907	1.4739	.24
C461	.6305	-1306	0969	1.8112	.27
C486	1.1657	-1742	1201	1.6120	.20
C558	1.1161	-1215	1526	1.2663	.29
C604	1.4490	-5592	2756	1.2541	.178
C613	1.3491	-5280	2032	1.0087	.191
C625	1.2492	-7595	1272	1.5678	.206
C638	1.4492	-3791	1164	1.0241	.224
C652	1.4337	-1484	1850	1.7127	.16
C741	1.7793	-1677	0827	1.8462	.13
C816	1.4693	-1230	0718	1.2362	.16
C922	2.1017	-1013	1588	1.1346	.117
C930	1.8602	-1636	1973	1.7061	.12
C974	2.1427	-6731	2642	2.3484	.121
C035	2.2770	-1503	1912	9892	.11
C1C41	2.0819	-5898	2073	2.3575	.124
C1130	2.0333	-5196	1667	2.1928	.127
C1132	2.7157	-1638	1275	2.2110	.9
C407	3.3758	-5076	1668	2.2762	.77
C444	2.5996	-2068	1687	1.1940	.9
C1547	3.4031	-0825	0777	1.7644	.76
C1550	3.1004	-2087	1542	1.4645	.48
C644	3.6165	-1944	1929	1.9202	.5
C727	4.14951	-2986	0644	1.4119	.6
C735	3.4699	-0600	0721	1.1383	.75
C999	3.5974	-0762	0857	.7685	.72
C2147	5.1525	-0861	0803	1.6165	.50*
C2457	5.4048	-1005	1114	1.6890	.48
C2555	4.5992	-1029	2276	1.9202	.000
C2584	5.1674	-1029	2276	1.9202	.000
C611	5.7438	-1029	2276	1.9202	.000
C626	6.3267	-0965	2768	1.4572	.45
C892	5.7834	-1059	0889	1.5320	.001
C277	7.8641	-1368	0681	1.0154	.34
C526	6.3846	-1215	0445	1.0755	.41

Station 10

3.902	8.5844	.1293	.1143	.6944	31	3	.0002	.0126
4.147	9.1224	.2938	.2369	1.4124	3	3	.0015	.0567
4.306	8.6125	.2938	.2369	1.4124	4	4	.0016	.0529
4.521	8.1374	.2938	.2369	1.4124	4	4	.0017	.0619
4.819	9.6386	.2065	.1604	.6601	28	3	.0005	.0226
5.002	12.0034	.2052	.1592	.6818	22	3	.0006	.0248
6.197	13.6340	.2037	.0861	.5360	20	3	.0008	.0371
6.256	11.2604	.1968	.0667	.7705	24	3	.0007	.0333
6.660	3.3298	.2902	.2377	1.3999	6	3	.0025	.0892
7.634	18.3211	.1768	.0544	.8368	15	3	.0009	.0348
8.032	16.0645	.0843	.1240	.7921	17	3	.0008	.0375
9.843	21.6539	.1976	.2440	.3409	12	3	.0009	.0332
10.732	5.3662	.3491	.3291	4.1702	3	3	.0045	.0654
11.068	19.9219	.1686	.1200	.0744	14	3	.0009	.0355
11.483	5.7415	.3491	.3291	4.1702	3	3	.0048	.0700
11.651	27.9634	.1961	.1376	.4085	10	3	.0010	.0391
12.519	6.2594	.3491	.3291	4.1702	3	3	.0052	.0763
13.387	26.7745	.2087	.0718	.3320	10	3	.0010	.0359
15.633	34.3914	.1624	.1013	1.0318	9	3	.0013	.0216
17.784	42.6821	.2144	.1234	1.1585	7	3	.0009	.0094
19.581	35.2473	.2666	.1475	.0556	8	3	.0005	.0075
22.312	44.6229	.2809	.2673	.2125	7	3	.0005	.0055
24.828	54.6209	.2837	.2841	.7136	6	3	.0003	.0053
27.144	65.1466	.2869	.3368	.7535	5	3	.0003	.0056
34.644	62.3597	.3244	.2240	.5257	5	3	.0002	.0051
37.126	74.3716	.3247	.2358	.5357	4	3	.0003	.0052
39.432	86.7528	.3552	.1950	.7572	3	3	.0003	.0054
41.430	99.4332	.2909	.1970	1.1305	4	3	.0002	.0035
61.293	110.3290	.4283	.2481	3.9599	3	3	.0003	.0023
99.167	49.5810	.3517	.2504	1.6140	5	5	.0005	.0039
102.562	51.0308	.3517	.2504	1.6140	5	5	.0005	.0040
104.665	52.3314	.5331	.3135	2.6141	3	3	.0005	.0037
164.736	84.8680	.5711	.4062	3.3896	3	3	.0009	.0047

Station 10, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	RANGE WIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RY
4.61	8.305	.1812	3	95	.0044	.0335	.0011	.0000	.0001
8.16	1.4693	.2362	3	105	.0021	.0185	.0003	.0000	.0001
1.727	4.1451	.4419	3	115	.0039	.0164	.0003	.0000	.0001
2.892	5.7834	.5320	3	115	.0016	.0150	.0002	.0000	.0001
3.277	7.8641	.0354	3	100	.0023	.0073	.0001	.0000	.0000
6.197	13.6340	.5360	3	100	.0054	.0157	.0003	.0000	.0003
9.242	21.6539	.3409	3	110	.0052	.0302	.0009	.0001	.0016
11.066	19.9219	.0744	3	105	.0029	.0161	.0003	.0000	.0006
11.651	27.9634	.4085	3	105	.0042	.0184	.0004	.0000	.0008
13.387	26.7745	.3320	3	100	.0041	.0078	.0001	.0000	.0002
19.581	35.2473	.0556	3	75	.0022	.0061	.0000	.0000	.0001
22.312	44.6229	.2125	3	100	.0028	.0082	.0001	.0000	.0003
34.644	62.2597	.5257	3	40	.0044	.0024	.0000	.0001	.0000
37.156	74.3716	.5357	3	130	.0022	.0045	.0000	.0000	.0002

Station 10, cont'd.

## APPARENT RESISTIVITY

LINING	PARTICLIC	EX PREC FX	EX PREC FY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RX	APPARENT RX
C24	C604	5.5813	-2.895	355	3	3	-1167	-1167
C26	C562	.5322	-2130	381	3	3	-1221	-1221
C28	C521	.3591	-407	411	3	3	-1241	-1175
C27	D479	.3203	-8299	947	3	3	-1565	-1729
C28	G922	.3234	-6091	232	3	3	-C708	-375A
C41	C693	.1022	-2746	-8359	240	3	-0914	-2436
C43	C688	.1484	-3961	.9553	247	3	-1102	-2671
C47	C848	.1967	.2155	.7895	252	3	-1336	-3366
C48	I407	.4240	.5094	.9543	153	3	-2696	-4505
C52	I419	.4878	.6697	.6785	151	3	-3617	-7475
C54	C72	.1447	.4442	.6720	.0842	148	-2739	-8720
C56	C500	.1500	.3579	.5727	.3070	144	-2464	-6343
C58	C49	.2148	.3414	.5008	.3741	160	-2084	-5529
I02	C2253	.22253	.3812	.5100	.3283	96	-2424	-5273
I21	C2411	.3469	.4573	.5777	.3777	90	-2229	-5381
I27	C3278	.3278	.3250	.4496	.3267	66	-2138	-6159
I47	C2653	.2730	.2730	.3552	.9178	81	-1316	-3247
I52	C3579	.2192	.2192	.2661	1.0585	60	-0879	-1396
I53	C4018	.1934	.1934	.2135	2.1712	54	-0470	-1673
C58	C5004	.5004	.1712	.2034	.9284	44	-0714	-1972
268	C5684	.0540	.0540	.0762	1.3623	39	-0711	-1275
269	C4644	.0516	.0516	.0624	.9252	46	-0677	-1277
312	C2392	.0667	.0667	.1739	2.2772	28	-0792	-1297
325	C6697	.0735	.0735	.1125	.9469	33	-0827	-2298
410	C9027	.1063	.1063	.1578	.2360	24	-0630	-3911
461	C2305	.2077	.2077	.1293	.4220	27	-1.826	-3324
464	C11657	.1412	.1412	.1731	.8307	20	-1.664	-3635
465	C11661	.2392	.2392	.1253	.7699	20	-2.463	-2466
604	C14498	.1864	.1864	.1620	1.4250	355	-2.967	-1292
614	C3498	.1905	.1905	.1517	1.2378	361	-3576	-1440
425	C12498	.2110	.2110	.2229	1.7251	411	-3967	-1455
639	C1498	.1659	.1659	.2585	.9176	447	-4860	-1537
462	C14337	.1873	.1873	.1821	1.2213	16	-4609	-22C1
741	C17793	.2497	.2497	.2673	.3970	13	-1.1073	-2353
416	C4693	.1617	.2128	.2301	1.6120	16	-1.0861	-2332
922	C2128	.1715	.1715	.2089	1.6117	232	-8047	-1664
970	C86C2	.1701	.1701	.2337	6.7543	12	-1.3419	-2676
971	C1428	.21428	.21428	.1061	.2500	3.204	-1.7659	-17C4
972	C2770	.2770	.2770	.12305	.72389	7.2389	-1.3953	-2774
1041	C0470	.1148	.1148	.2227	2.1389	247	-1.2868	-2164
1116	C0342	.1443	.1443	.12657	2.8409	252	-1.0476	-2645
1122	C7157	.2754	.2754	.2636	1.6744	9	-1.0476	-2767
1427	C3778	.1562	.1562	.2017	8.4940	153	-1.3757	-3787
1442	C5694	.3274	.3274	.3922	2.3359	9	-1.2927	-25C2
1443	C4642	.2005	.2005	.2331	7.4666	151	-1.1224	-4463
1460	C1004	.3475	.3475	.4055	3.2794	8	-2.999	-2649
1464	C6165	.4011	.4011	.3115	.8105	6	-1.422	-2448
1472	C1451	.2446	.2446	.3224	2.8296	6	-1.136	-2324
1474	C1726	.34716	.34716	.2129	3.2644	148	-7124	-4444
2611	C5591	.3591	.3591	.2834	3.5813	144	-6884	-444C
2612	C1469	.51649	.51649	.3258	2667	4.5564	-7305	-6C73
2613	C4577	.3475	.3475	.3106	.3150	100	-5658	-679C
2614	C6992	.3323	.3323	.1809	1.2365	5	-C412	-2444
2615	C1674	.34716	.34716	.3323	.1859	1.3365	-C922	-2444
2616	C7418	.34716	.34716	.3323	.1809	1.3365	-0412	-2442
2617	C3267	.24724	.24724	.1466	.5132	5	-C607	-2447
2618	C786C	.2437	.2437	.2509	.3691	90	-4449	-4C24
2619	C2754	.1697	.1697	.2514	.6333	66	-4274	-4274
2620	C2474	.2474	.2474	.2429	1.894	411	-4441	-4441

Station 11

3.904	8.5889	.2491	.2435	1.6815	60	3	.4283	.5666
4.147	9.1224	.6083	.4090	.4983	4	3	.0860	.3535
4.306	8.6125	.6083	.4090	.4983	4	3	.0893	.3671
4.521	8.1374	.6083	.4090	.4983	4	3	.0937	.3654
4.822	9.6432	.3268	.3434	1.2500	54	3	.3542	.4692
5.004	12.0093	.3123	.3419	1.2106	44	3	.3773	.4210
4.700	13.6407	.1612	.2624	.5447	39	3	.3249	.3674
4.259	11.2658	.1433	.1898	.6090	46	3	.2875	.3828
6.640	3.3298	.6050	.4016	.4787	6	3	.1352	.5669
7.638	18.3298	.1649	.1299	.1463	28	3	.2168	.3255
8.036	16.0725	.1169	.1326	.6062	33	3	.2279	.2944
9.847	21.6647	.1621	.2183	.3240	24	3	.3161	.4299
10.732	5.3662	.8132	.8259	.4979	3	3	.1770	1.0063
11.073	19.9318	.2034	.2137	.5730	27	3	.17016	1.9715
11.483	5.7415	.8132	.8259	.4979	3	3	.1894	1.5766
11.657	27.9775	.2345	.2225	.2112	20	3	2.4329	2.3472
12.519	6.2594	.8132	.8259	.4979	3	3	.2065	1.1737
13.394	26.7874	.8982	.8826	1.2449	20	3	15.7300	20.0470
15.640	34.4080	.8965	.8692	1.0548	16	3	20.5330	27.3270
17.793	42.7022	.8930	.8408	2.2955	13	3	21.1700	37.3470
19.591	35.2634	.9259	.9074	2.1785	16	3	27.8200	25.6280
22.323	44.6449	.9274	.9091	3.2251	12	3	33.1840	29.9780
24.840	54.6478	.9112	.8967	6.4514	11	3	36.3930	29.1920
27.157	65.1763	.9152	.9074	2.9090	9	3	40.5910	26.8460
34.661	62.3908	.7494	.7145	1.3369	9	3	35.3490	14.7710
37.205	74.4103	.7499	.7149	1.3762	8	3	37.3450	15.9220
39.452	86.7980	.7241	.6591	.9118	6	3	19.5450	6.8928
41.451	99.4827	.7512	.6714	.8677	6	3	21.3650	6.9550
61.323	110.3826	.5170	.5050	.5451	5	3	8.6699	3.5649
62.008	124.0156	.5170	.5050	.5451	5	3	8.7661	3.6047
62.661	137.8512	.5170	.5050	.5451	5	3	8.8583	3.6425
63.267	151.8395	.5485	.5455	.3475	3	3	6.7869	3.5217
99.522	218.9381	.6947	.7547	1.0616	3	3	3.0634	9.5312
103.348	206.6927	.6947	.7547	1.0616	3	3	3.1812	4.7055
108.495	195.2934	.6947	.7547	1.0616	4	3	3.3397	4.9420
149.831	79.9169	.6263	.6291	1.0541	6	3	6.0512	11.4030
257.573	128.7880	.7203	.7535	.1038	3	2	136.8100	565.6650
275.588	137.7942	.7203	.7535	.1038	3	2	146.3800	605.2200
300.454	150.2246	.7203	.7535	.1038	3	2	159.5800	659.6220

Station 11, cont'd.

## APPENDIX C - TEST DATA AND APPARENT RESISTIVITY DATA

FREQUENCY	BANDWIDTH	ROTATION ANG	QUALITY	SKEWNESS		ZMAX		RI	
				ZY	ZX	ZY	ZX	ZY	ZX
C25	0.604	.2895	3	105	1.7318	10.	7380	0.151	0.195
C26	.0562	.2130	3	100	2.0901	11.	3530	-0.0223	-0.257
C24	0.521	-4.071	3	105	2.5365	1.	7442	-0.0235	-0.154
C22	.072	.0842	3	100	1.9343	5.	1062	-0.0541	-0.7772
C23	1.447	-1.477	3	105	1.4909	3.	4542	14.	1540
C21	15.06	.3070	3	105	1.1597	2.	7118	-0.0370	-0.370
C20	.089	.2148	3	105	1.1464	3.	5799	-0.0241	-1.3168
C19	2.255	.2253	3	100	1.3283	7.	9701	-0.0269	-1.2463
C18	.121	.2411	3	100	1.3776	8.	7116	-0.183	-1.1113
C17	32.78	.3267	3	100	1.6955	2.	0684	5.	3752
C16	.410	.9027	3	100	2.360	4.	6387	-0.132	-1.190
C15	.461	.8305	3	90	4.220	1.	0556	-0.004	-0.077
C14	7.779	.7793	3	95	3.970	2.	4663	-2.466	-0.056
C13	.741	-4.267	3	110	5.332	6.	829	-1.429	-0.164
C12	2.626	6.	1267	1.	4983	1.	0691	-5.577	-0.091
C11	4.147	.9.1224	3	135	4.983	10.	000	-0.0217	-0.025
C10	.306	8.6125	3	135	4.983	1.	300	-0.025	-0.049
C9	4.521	.8.1374	3	135	4.983	3.	612	-1.477	-0.1205
C8	6.250	1.3.6407	3	135	4.983	4.	0683	-0.020	-1.255
C7	6.660	6.	3298	1.	4787	12.	083	-1.477	-0.1214
C6	7.678	1.8.	3298	1.	4463	2.	0244	-0.021	-0.046
C5	8.847	2.1.	6647	1.	3240	120	0.460	-0.0235	-0.035
C4	15.732	5.	3662	1.	4479	120	0.946	-1.451	-0.1054
C3	11.073	1.9.	9318	1.	5730	130	0.096	-0.028	-0.050
C2	11.483	5.	7415	1.	4479	120	0.096	-0.028	-0.050
C1	11.657	27.	9775	1.	2112	60	0.4554	-0.018	-0.046
R1	12.519	6.	4479	1.	3240	120	0.974	-0.035	-0.067
R2	6.1223	11.0.	3826	1.	5451	170	0.926	-0.0236	-0.049
R3	6.2.008	6.2.	0156	1.	5451	120	0.003	-0.0171	-0.0475
R4	6.2.661	1.37.	8512	1.	5451	130	0.926	-0.0209	-0.0487
R5	6.1.461	2.47	1.51	1.	3495	170	0.074	-0.0122	-0.0469
R6	6.2.775	2.77.	5773	1.	7820	1038	0.926	-0.0218	-0.046
R7	6.8.88	1.7.7.	7.942	1.	1038	210	0.938	-0.0135	-0.046
R8	6.2244	1.7.7.	5.884	1.	1038	120	0.5787	-0.0861	-0.18460
R9	6.505	5.775	5.884	2.	8725	210	0.5787	-0.0861	-0.18460

### Station 11, cont'd.

## NON-AVAILABILITY APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EY PAED EY	EY PAED EY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT EY	APPARENT EY	
.025	.0604	-.8028	-.8123	.7891	355	1	1.755	1.2051	
.026	.0562	-.8052	-.8629	.7630	411	1	2.252	.2537	
.026	.0521	-.8159	-.8325	.9149	.7638	447	.5657	.6737	
.027	.0479	-.8753	-.7182	.9255	232	1	1.3051	.9459	
.030	.0922	-.7633	-.8198	1.1611	240	2	1.4794	1.1352	
.041	.0893	-.0668	-.7806	.8488	1.3493	247	2	1.4100	1.1746
.043	.0868	-.7797	-.8946	.9566	1.4397	252	2	1.3622	1.1752
.047	.0848	-.1407	-.8639	.9582	2.4243	96	1	1.4820	1.7052
.058	.1419	-.2411	-.9223	.9502	1.5795	153	1	1.4581	1.3511
.068	.1447	-.3276	-.9376	.9577	1.9153	151	1	1.3902	1.3562
.072	.1447	-.8935	-.7652	.9613	2.1281	148	1	1.4047	1.4449
.083	.1500	-.8946	-.7806	.9610	2.0487	144	1	1.4852	1.6103
.089	.2148	-.8914	-.7797	.9565	1.4785	100	1	1.4820	1.7052
.107	.2253	-.9014	-.9014	.9582	2.4243	96	1	1.4659	1.7444
.121	.2411	-.9223	-.9223	.9634	2.5736	90	1	1.7497	2.0723
.137	.3276	-.9376	-.9376	.9678	2.4767	66	1	2.0517	2.3554
.147	.3276	-.2652	-.9342	.9622	2.4470	81	1	2.1674	2.5633
.163	.3578	-.9249	-.9249	.9587	2.0947	60	1	2.4189	2.9644
.201	.4018	-.9092	-.9092	.9348	1.7060	54	1	2.5695	3.0934
.206	.3064	-.9122	-.9122	.9324	1.3240	47	1	2.6917	3.7825
.258	.5684	-.9060	-.9060	.9133	1.2006	39	1	2.7867	4.6649
.261	.4694	-.9053	-.9053	.9056	1.3550	46	1	2.8753	4.6629
.316	.7638	-.8914	-.8914	.8835	1.0815	28	1	3.1169	4.0024
.335	.6697	-.8811	-.8811	.8753	1.0959	33	1	2.925	6.1647
.410	.9027	-.8400	-.8400	.8322	.9783	24	1	4.0494	7.5316
.441	.4305	-.8274	-.8274	.8002	1.1321	27	1	3.8707	8.3721
.458	.1657	-.8077	-.8077	.7898	1.1911	20	2	4.0778	8.6549
.559	.1161	-.6201	-.7512	.7512	1.3634	20	2	4.2272	6.4649
.604	.1449	-.0808	-.0808	.0928	1.4404	178	3	1.0280	1.0371
.625	.1349	-.0659	-.0659	.0838	1.7520	191	3	1.0493	.0574
.638	.1242	-.0924	-.1258	.1258	1.0095	206	3	.0693	.1255
.697	.1437	-.1492	-.8235	.1794	.5293	224	3	1.4424	1.2424
.741	.1783	-.4193	-.7256	.7394	1.0452	16	2	4.5766	10.9750
.814	.1463	-.1463	-.8249	.7256	.6416	13	2	5.1176	12.5620
.922	.2117	-.5723	-.5723	.7613	.3262	117	3	5.4946	13.1645
.950	.8622	.8100	.8100	.6598	.4751	12	2	1.4795	5.2442
.974	.2127	.5321	.6210	.6006	1.21	3	6.1313	15.7870	
1.034	.2770	.8390	.6476	.9060	1.11	3	1.2646	1.6324	
1.061	.20419	.5275	.6451	.3898	1.24	3	6.5964	18.5772	
1.120	2.0333	.5479	.6827	.2476	127	3	1.4572	8.6611	
1.172	.27157	.6539	.6060	.6060	.6747	117	3	1.7675	5.9216
1.407	.33756	.5421	.5421	.6876	.1727	77	2	6.9997	21.1650
1.447	.21474	.5752	.6890	.5903	1.0200	99	3	2.1617	7.7745
1.457	.35974	.5621	.8512	.4311	.76	3	9.1416	25.1620	
1.550	.51525	.5275	.6451	.3898	.7024	50	3	2.6102	12.4630
1.644	.24165	.9039	.5186	.1447	.1447	6	3	9.7138	27.4620
1.721	.41461	.9011	.5104	.7080	.7	3	10.1215	27.4220	
1.735	.34469	.5752	.6876	.5044	.5044	5	3	11.1590	7.4741
1.962	.55974	.5621	.8180	.6247	.75	3	2.8945	14.9391	
2.147	.51525	.5275	.7986	.7024	.72	3	3.2421	17.1874	
2.457	.54543	.5275	.7943	.7355	.48	3	3.4776	15.4650	
2.556	.45342	.8500	.5430	.2937	.5	3	3.5515	20.3190	
2.647	.51474	.8500	.5430	.2937	.5	3	16.0475	34.0600	
2.641	.57438	.8500	.5430	.2937	.5	3	16.2145	34.4400	
2.636	.63267	.8340	.5430	.2937	.5	3	16.3870	34.8020	
2.692	.57634	.5643	.5430	.2211	.4	3	16.5840	34.2710	
2.777	.7274	.5711	.5711	.8713	.8713	45	3	16.7232	20.7930
3.421	.3646	.7734	.7734	.9243	.9243	34	3	3.5537	23.6840
6	.3646	.7734	.7734	.9243	.9243	34	3	3.7502	24.3550

Station 12

3.902	8.5844	.5516	.7196	1.0192	31	3	3.9034	25.3090
4.147	9.1224	.8878	.3933	.1239	4	3	24.5580	57.8540
4.306	8.6125	.8878	.3933	.1239	4	3	25.5030	65.0830
4.521	8.1374	.8878	.3933	.1239	4	3	26.7730	63.0770
4.810	9.6386	.4969	.6552	1.1561	28	3	3.9075	25.5450
5.002	12.0034	.5068	.6585	1.1558	22	3	3.9135	25.9920
6.147	13.6340	.4894	.6049	1.4481	20	3	4.1048	28.3300
6.256	11.2604	.4698	.5853	1.2763	24	3	3.9103	27.9260
6.660	3.3248	.8873	.3930	.1256	6	3	39.3570	92.6350
7.634	18.3211	.4994	.5532	1.5119	15	3	4.3220	31.3180
8.032	16.0645	.5170	.5926	1.3317	17	3	4.6458	26.3710
9.843	21.6539	.5375	.6991	1.9946	12	3	4.0545	23.7620
10.732	5.3662	.8587	.3856	.2857	3	3	41.3450	114.1800
11.068	19.9219	.7464	.8657	6.3973	14	2	21.6540	24.7360
11.483	5.7415	.8587	.3856	.2857	3	3	44.2360	122.1600
11.651	27.9634	.7164	.8481	5.4683	10	2	22.4520	28.9610
12.519	6.2594	.8587	.3856	.2857	3	3	48.2270	133.1800
13.387	26.7745	.8708	.9367	1.5709	10	1	33.6390	24.5560
15.633	34.3914	.9198	.9546	1.2448	9	2	39.9470	29.890
17.784	42.6821	.9403	.9725	.9319	7	3	43.3520	27.0290
19.581	35.2473	.9541	.9804	1.2925	8	3	43.2630	22.8460
22.312	44.6229	.9516	.9822	.7800	7	3	47.0200	16.0250
24.828	54.6209	.9457	.9797	.7683	6	3	47.0250	14.6620
27.144	65.1466	.9477	.9805	.8063	5	3	49.7460	15.6410
34.644	62.3597	.9559	.9822	.9019	5	3	45.7800	14.7040
37.186	74.3716	.9606	.9845	.9650	4	3	43.6390	14.2350
39.432	86.7528	.9669	.9831	.9410	3	2	41.1200	13.9450
41.430	99.4232	.9662	.9799	.9369	4	2	36.9920	13.6310
61.293	110.3290	.9520	.9709	1.0921	3	2	36.6790	14.5490
99.167	74.5210	.8759	.8847	1.0891	5	2	70.7570	32.4600
102.062	51.0308	.8759	.8847	1.0891	5	2	72.6240	32.4090
104.665	52.1314	.8522	.8283	.9915	4	2	75.5840	34.6170
169.736	84.8480	.7233	.6831	.6538	3	2	127.1520	108.4900

Station 12, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATE ANG	ZX	ZY	ZMAX	RX	RY
.638	1.1447	.5293	3	20	.1917	.2191	.0847	.0047	.0061
.922	2.2117	.3262	3	20	1.6049	4.2141	20.3350	.4747	1.2731
.910	1.3602	.4351	2	20	4.6894	5.9063	56.8750	4.0908	6.4893
1.041	2.0819	.3898	3	20	1.4290	2.6995	9.3292	.4251	1.5172
1.110	2.0733	.2476	3	20	1.5056	3.1258	12.0370	.5121	2.2073
1.407	3.3758	.1727	3	25	1.5909	3.1951	12.7400	.7120	2.8719
1.547	3.4031	.4311	3	20	1.6305	5.3633	31.4230	.8225	8.8990
1.705	3.4699	.5044	3	20	1.5703	5.4403	32.0630	.8557	10.2700
2.553	4.5992	.2937	3	25	4.7615	3.5814	35.4990	11.5860	6.5548
2.844	5.1674	.2937	3	25	4.7615	3.5814	35.4990	11.7150	6.6273
2.611	5.7438	.2937	3	25	4.7615	3.5814	35.4990	11.8390	6.6976
2.636	6.3267	.2211	3	25	4.6385	3.7126	35.2990	11.3440	7.2669
4.147	9.1224	.1239	3	35	5.1268	2.2038	31.1410	21.7980	4.0277
4.306	8.6175	.1239	3	35	5.1268	2.2038	31.1410	22.4370	4.1827
4.921	8.1374	.1239	3	35	5.1263	2.2038	31.1410	23.7650	4.3911
6.660	3.3298	.1256	3	35	5.1227	2.1958	31.0640	34.9530	6.4217
10.732	5.3662	.2857	3	35	4.9434	1.8613	27.9010	52.4570	7.4360
11.483	4.7415	.2857	3	35	4.9434	1.8613	27.9010	56.1210	7.9560
12.519	6.2594	.2857	3	35	4.9434	1.8613	27.9010	61.1540	8.6737

Station 12, cont'd.

## NON-RECTATED APPARENT RESISTIVITIES

Station 13; cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKENNESS	QUALITY	ROTATN ANG	ZI	ZY	ZMAT	RX	RY
.047	.0848	.5713	3	30	.7406	.41259	17.5720	.0052	.1603
.059	.1407	.5477	3	30	.9305	5.2028	27.9350	.0102	.3174
.064	.1419	.4697	3	30	1.0100	5.8175	34.8640	.0132	.4365
.072	.1447	.4305	3	30	1.3303	6.6912	46.5420	.0256	.6476
.083	.1500	.1201	3	30	1.5489	5.5612	33.3260	.0400	.5153
.089	.2148	.0931	3	30	1.6084	5.4116	31.8720	.0463	.5242
.102	.2253	.4690	3	25	.5506	2.5267	6.6875	.0062	.1308
.121	.2411	.5067	3	40	.0413	.1435	.0223	.0000	.0005
.137	.3278	.1800	3	55	.0127	.0581	.0035	.0000	.0001
.163	.3579	.5440	3	10	.0055	.0215	.0005	.0000	.0000
.201	.4018	.2341	3	15	.0039	.0254	.0007	.0000	.0000
.208	.5004	.3796	3	15	.0030	.0271	.0007	.0000	.0000
2.636	6.3267	.5454	3	15	.0176	.0881	.0081	.0002	.0001
10.732	5.3662	.5200	3	330	.0411	.1542	.0255	.0036	.0511
11.483	5.7415	.5200	3	60	.1542	.0411	.0255	.0546	.0039
12.519	6.2594	.5200	3	60	.1542	.0411	.0255	.0596	.0042
17.784	62.6821	.3327	3	75	1.8445	.1878	3.4375	12.1010	.1255
19.581	35.2473	.3580	3	75	2.0882	.1365	4.3792	17.0770	.0729
22.312	44.6229	.1634	3	75	1.6696	.0498	2.7899	12.4380	.0111
24.828	54.6209	.1668	3	80	1.2359	.1205	1.5420	7.5846	.0721
27.144	65.1466	.1380	3	80	1.2070	.1311	1.4739	7.9083	.0932

Station 13, cont'd.

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PRED EX	EY PRED EY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RX	APPARENT RY
.659	1.4490	.0454	.1540	3.7522	178	3	.1818	.0992
.613	1.3491	.0775	.1485	2.5083	191	3	.1925	.0056
.625	1.2492	.0785	.1994	2.9882	206	3	.2034	.0113
.638	1.1492	.0633	.1307	2.1041	224	3	.1821	.0040
.922	2.2117	.0949	.1317	1.3869	117	3	.1976	.0027
.974	2.1427	.0615	.1333	2.2774	121	3	.2151	.0095
1.041	2.0819	.0535	.1621	4.0159	124	3	.2019	.0046
1.130	2.0333	.0379	.1698	5.7192	127	3	.1944	.0081
1.407	3.3758	.0644	.1656	3.1060	77	3	.2300	.0090
1.547	3.4031	.0658	.1511	2.8036	76	3	.2484	.0089
1.735	3.4699	.0429	.1117	2.7326	75	3	.2607	.0060
1.999	3.5974	.0646	.1113	1.5674	72	3	.2679	.0082
2.147	5.1525	.0525	.1038	1.7799	50	3	.2775	.0081
2.457	5.4048	.0917	.1432	2.2541	48	3	.2765	.0080
2.892	5.7834	.0858	.1219	1.4693	45	3	.2946	.0080
3.277	7.8641	.1208	.1397	1.2853	34	3	.3331	.0082
3.536	6.3646	.0264	.1088	5.6277	41	3	.3643	.0099
3.902	8.5844	.0931	.1084	1.2202	31	3	.3747	.0155
4.819	9.6386	.0832	.1160	2.4036	28	3	.3692	.0101
5.062	12.0034	.1206	.1385	1.3939	22	3	.3940	.0110
6.197	13.6340	.1087	.1023	.7852	20	3	.3183	.0075
6.256	11.2604	.0883	.1021	.9168	24	3	.3465	.0084
7.624	18.3211	.0887	.0964	.8339	15	3	.5031	.0034
8.932	16.0645	.1161	.1448	1.2523	17	3	.8070	.0154
9.203	21.6539	.2051	.2744	1.4598	12	3	.4.0219	.0411
11.068	19.9219	.2539	.3020	1.8666	14	3	.26.0270	.3730
11.651	27.9634	.2403	.2827	10.4640	10	3	.23.4290	.3422
12.387	26.7745	.3567	.3480	1.3197	10	3	.50.6620	.8191
15.633	34.3914	.4546	.3802	.6452	7	3	.56.8700	.1.0338
17.784	42.6821	.5257	.3943	.5327	7	3	.6.4060	.1.2048
19.581	35.2473	.5278	.3279	.3580	8	3	.54.8210	.1.0449
22.312	44.6229	.5166	.1876	.1634	7	3	.46.6190	.8879
24.828	54.6209	.4274	.2763	.1668	6	3	.42.6670	.1.1397
27.144	65.1466	.4251	.2791	.1380	5	3	.46.6800	.1.2408
34.644	62.3597	.3104	.3796	.8561	5	3	.67.3780	.2.7052
37.186	74.3716	.3131	.4239	1.0902	4	3	.74.1700	.3.1711
39.432	66.7528	.3686	.4750	.9900	4	3	.84.6470	.4.3490
41.430	49.4332	.3209	.4356	1.0653	4	3	.73.2400	.4.1577
41.293	110.3290	.3524	.4297	.9676	3	3	.71.6390	.3.9995
49.167	49.5810	.2995	.3482	.9429	3	3	.126.5100	.7.3167
102.262	51.0368	.2995	.3482	.9429	4	3	.130.2000	.7.5306
104.465	52.3314	.1363	.2508	1.4241	4	3	.70.8510	.4.7569
169.736	64.2480	.1790	.1997	.9315	3	3	.122.5000	.7.1938

Station 13, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RY
17.784	42.6821	.5327	3	75	1.8445	.1878	3.4375	12.1010	.1255
19.521	35.2473	.3580	3	75	2.0882	.1365	4.3792	17.0770	.0729
22.312	44.6229	.1634	3	75	1.6696	.0496	2.7822	12.4380	.0111
24.628	54.6209	.1668	3	80	1.2359	.1205	1.5420	7.5846	.0721
27.144	65.1466	.1380	3	80	1.2076	.1311	1.4739	7.9083	.0933

Station 13, cont'd.

## BORN-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PARDEX	EX PREDEX	SKINNESS	POINTS IN BM	QUALITY	APPARENT RI	APPARENT RI
.025	.0604	.8031	.7676	.16492	355	2	1.4385	-25.44
.026	.0562	.8028	.8236	.2228	361	2	2.0804	-3.93
.027	.0521	.8061	.8345	.2492	411	2	2.4667	-5.32
.027	.0479	.80811	.8775	.2209	497	2	3.1402	-9.78
.038	.0922	.8335	.7597	.0504	232	2	1.9570	1.86
.041	.0893	.8468	.8246	.0872	240	2	1.9490	1.84
.043	.0869	.8523	.8490	.1131	247	2	1.9700	1.85
.047	.0848	.8417	.7129	.0898	252	2	1.9200	1.90
.059	.1407	.8931	.7434	.0774	153	2	1.9350	1.34
.064	.1419	.89109	.7549	.0877	151	2	1.9660	1.274
.072	.1447	.9196	.7730	.1142	148	2	1.9430	2.72
.083	.1500	.9287	.8576	.2093	144	2	1.9460	1.310
.089	.2148	.9398	.9034	.2602	100	2	1.9330	1.651
.102	.2251	.9553	.9393	.1146	94	2	1.922	1.742
.121	.2411	.9646	.9428	.3123	90	2	1.9530	2.197
.137	.3276	.9730	.9442	.3509	64	2	1.9710	2.451
.147	.2653	.9660	.9300	.3357	81	2	1.9550	2.944
.163	.3579	.9646	.9151	.3056	60	2	1.9240	1.141
.201	.4018	.9458	.8630	.1919	54	2	1.9500	2.360
.208	.5004	.9446	.8570	.1633	48	2	1.9220	6.625
.258	.5684	.9403	.8116	.1833	39	2	1.9540	6.547
.261	.4694	.9312	.8123	.1849	46	2	1.9510	6.631
.316	.7636	.9436	.7979	.2160	28	2	1.9680	5.761
.335	.6697	.9436	.8002	.1860	33	2	1.9750	5.755
.410	.9027	.9623	.7970	.0778	24	2	1.9310	6.631
.461	.8305	.9579	.7413	.0471	27	2	1.9470	5.754
.486	.1657	.9591	.7247	.0505	20	2	1.9740	5.447
.556	.1161	.9627	.7203	.0535	20	2	1.9580	5.447
.604	.14498	.6209	.4937	.1214	355	3	1.9880	5.447
.614	.13498	.7024	.5289	.1097	381	3	1.9190	2.345
.625	.12498	.7889	.5473	.1236	411	3	1.9240	2.346
.619	.14498	.8255	.5992	.1745	447	3	1.9750	5.447
.652	.14337	.9681	.6647	.0802	16	2	2.0350	5.357
.741	.17793	.9686	.7220	.0760	13	2	1.9250	5.225
.816	.14693	.9694	.7267	.0694	16	2	1.9590	5.246
.922	.2.2128	.8617	.7152	.2502	232	2	1.9120	4.191
.930	.1.8602	.9719	.7454	.0539	12	2	1.9220	4.229
.974	.2.1438	.8329	.6854	.1819	240	2	1.9440	5.619
.035	.2.2770	.9742	.7698	.1548	11	2	1.9410	1.968
.041	.2.0830	.8419	.7074	.2704	247	2	1.9450	6.172
.130	.2.0343	.8225	.7113	.3067	252	2	1.9750	4.849
.132	.2.7157	.7947	.7947	.1616	9	2	1.9360	4.229
.4.97	.3.3775	.8215	.6747	.2649	153	2	1.9120	8.872
.144	.2.5996	.9695	.8376	.2749	9	2	1.9550	1.922
.154	.3.4048	.8121	.6461	.3041	151	2	1.9140	9.51
.1550	.3.1004	.8487	.8458	.2889	8	2	1.9440	6.847
.1644	.3.6165	.9643	.8388	.3095	6	2	1.9590	5.509
.1727	.4.1451	.9658	.8367	.2516	6	2	1.9750	4.252
.1736	.3.4716	.7918	.6171	.2747	162	2	1.9330	6.068
.1949	.3.5991	.7622	.5868	.2726	144	2	1.9450	4.907
.2.148	.5.1549	.7518	.5845	.2607	100	2	1.9490	2.062
.2.452	.5.4077	.6920	.5663	.3062	94	2	1.9220	1.275
.2.555	.4.5992	.9379	.8247	.2565	5	2	1.9410	4.252
.2.584	.5.1674	.9379	.8247	.2565	5	2	1.9750	4.252
.2.611	.5.7438	.9379	.8247	.2565	5	2	1.9110	4.246
.2.636	.6.3267	.9275	.8505	.2776	5	2	1.9460	3.668
.2.893	.5.7860	.6405	.5386	.3525	50	2	1.9110	4.352
.2.8664	.7.8664	.5797	.5160	.3615	64	2	1.9750	4.842
.2.78	.6.3674	.64851	.5028	.4317	40	2	1.9440	4.8342

Station 14

3.904	.8.5889	.5818	.9879	.3539	60	3	19.7479	4.7124
4.147	.9.1229	.8473	.7609	.3897	4	2	72.6413	4.7615
4.306	.8.6125	.8473	.7609	.3897	4	2	75.4779	7.0216
4.521	.8.1379	.8473	.7609	.3897	4	2	74.2183	7.3715
4.822	.9.6432	.5771	.4533	.2387	59	3	45.2759	4.4430
5.004	12.0093	.6000	.4499	.2489	44	3	44.5400	4.4452
6.200	13.6407	.6000	.5037	.4531	39	3	47.7160	4.0441
6.259	11.2658	.5941	.5079	.4120	46	3	48.8469	5.3878
6.660	3.3298	.8461	.7566	.3674	6	2	115.6450	12.7717
7.638	18.3298	.6558	.5571	.6823	28	3	40.3493	4.8514
8.036	16.0725	.6153	.5779	.5242	33	3	44.6130	6.1447
9.847	21.6647	.6395	.6705	.5194	24	2	58.4746	5.4140
10.732	5.3662	.7913	.7083	.7899	3	2	130.2400	13.0970
11.073	19.9318	.8613	.8237	.7985	27	1	72.0380	4.4237
11.483	5.7415	.7913	.7083	.7899	3	2	139.3500	14.0130
11.657	27.9775	.8286	.8319	.8517	20	1	72.6300	4.5414
12.519	6.2594	.7913	.7083	.7899	3	2	151.9200	15.2770
13.394	26.7874	.9295	.8851	1.0152	20	1	62.7310	11.1470
15.640	34.4080	.9504	.9046	1.1347	16	2	66.3490	11.0410
17.792	42.7022	.9541	.8939	1.1259	13	3	58.9540	3.1219
19.591	35.2634	.9518	.9274	1.1821	16	2	69.0010	11.3740
22.323	44.6449	.9564	.9325	1.2659	12	2	62.5790	11.3100
24.840	54.6478	.9607	.9462	1.2565	11	2	63.4060	13.4410
27.157	65.1763	.9790	.9663	1.3537	9	3	67.0630	18.0210
34.661	62.3908	.9851	.9760	1.2975	9	2	71.7620	21.7770
37.205	74.4103	.9864	.9792	1.2402	8	2	75.8170	23.3630
39.452	86.7980	.9871	.9811	1.2877	6	2	80.5250	25.6820
41.451	99.4827	.9829	.9779	1.3095	6	2	75.3560	21.5180
41.323	110.3826	.9436	.9424	1.4476	5	1	62.4070	14.3200
42.058	124.0186	.9636	.9424	1.4476	5	1	63.0990	14.5400
42.661	137.8512	.9636	.9424	1.4476	5	1	63.7620	14.5930
43.267	151.8395	.9861	.9339	1.3024	4	1	53.2550	12.2040
49.521	218.9381	.9115	.8140	1.8017	4	1	51.4460	14.6610
103.346	206.6927	.9115	.8240	1.8017	4	1	53.4250	14.6920
108.495	195.2934	.9115	.8340	1.8017	4	1	56.0870	15.3200
169.831	74.9169	.6493	.7935	1.6972	6	2	106.1100	26.0560
257.573	128.7820	.6757	.8133	.8075	3	3	1306.4000	265.3700
275.688	137.7947	.6757	.8133	.8075	3	2	1297.5000	247.9300
300.454	156.2246	.6757	.8133	.8075	3	3	1521.4000	309.5400

Station 14, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG
.025	.0604	-1.6492	2	295
.026	.0562	-2.2228	2	245
.027	.0521	-2.6912	2	245
.028	.0479	-2.204	2	200
.041	.0893	-0.0504	2	245
.047	.0848	-0.072	2	245
.059	.0848	-1.319	2	245
.064	.1407	-0.0779	2	245
.072	.1414	-0.0877	2	245
.083	.1447	-1.142	2	245
.089	.1500	-2.093	2	245
.102	.2148	-2.602	2	245
.121	.2253	-3.146	2	245
.137	.2411	-3.323	2	245
.167	.3276	-3.504	2	250
.201	.3653	-3.357	2	250
.208	.5004	-1.919	2	250
.258	.5684	-1.633	2	250
.261	.9694	-1.833	2	250
.318	.7638	-2.160	2	250
.335	.6697	-1.860	2	250
.410	.9027	-0.0778	2	250
.461	.8305	-0.471	2	250
.486	.11657	-0.0505	2	250
.558	.11161	-0.0335	2	250
.614	.13498	-1.214	2	250
.625	.12498	-1.097	2	250
.639	.11498	-1.236	2	250
.652	.14337	-1.795	2	250
.741	.17793	-0.0802	2	250
.816	.14693	-0.0760	2	250
.922	.21228	-0.2502	2	250
.930	.18692	-0.0539	2	250
.974	.21433	-1.819	2	250
1.035	.22770	-1.548	2	250
1.041	.20830	-2.074	2	250
1.130	.20343	-1.067	2	250
1.132	.20715	-1.616	2	250
1.147	.37775	-2.3775	2	250
1.144	.2518	-2.649	2	250
1.154	.25996	-2.747	2	250
1.154	.34048	-3.041	2	250
1.160	.31004	-2.889	2	250
1.164	.31615	-3.062	2	250
1.172	.41451	-3.095	2	250
1.173	.37716	-2.518	2	250
1.199	.35991	-2.726	2	250
2.144	.51549	-2.807	2	250
2.152	.54577	-3.062	2	250
2.164	.31615	-2.565	2	250
2.167	.51674	-2.565	2	250
2.611	.57436	-2.565	2	250
2.636	.32667	-2.776	2	250
2.843	.77860	-3.525	2	250
3.276	.73664	-3.615	2	245
3.512	.63672	-4.217	3	245

Station 14, cont'd.

3	5.809	3.904	-353.9	1.2190	17.1720	12.2490	1.1602
4	1.122	1.147	-369.7	2.2765	7.2808	5.81920	4.2377
5	6.125	6.125	-369.7	2.2765	7.2808	5.81920	4.4630
6	1.137	1.137	-369.7	2.2765	7.2808	5.81920	4.4634
7	6.432	6.822	-238.7	3.86558	3.86558	15.9140	9.246
8	1.120	1.120	-12.009	2.45	3.9183	16.2470	-8.446
9	6.254	6.254	-453.1	2.45	3.5784	13.7156	-1.1236
10	6.660	6.660	-412.0	250	3.5969	9.747	15.4790
11	3.329	3.329	-367.4	255	7.2549	13.8870	1.1942
12	6.072	6.072	-524.2	250	2.2470	5.74750	6.7251
13	6.447	6.447	-519.4	250	1.0434	12.0060	1.7443
14	6.447	6.447	-519.4	250	3.2702	1.1009	21.0628
15	6.447	6.447	-519.4	250	1.1009	11.9066	2.3868

Station 14, cont'd.

## 800a-BIOTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EZ PRED EX	EY PRED EY	SKEWNESS	POINTS IN BM	QUALITY	APPARENT RI
.025	.0604	-1.957	-0.974	.5701	178	3	.0000
.026	.0562	-1.769	-0.921	.9776	191	3	.0000
.026	.0520	-1.731	-0.875	.8507	206	3	.0000
.027	.0479	-1.693	-0.832	.8899	229	3	.0000
.038	.0922	-1.086	-1.112	.2597	117	3	.0001
.041	.0893	-1.296	-1.034	.3032	121	3	.0012
.043	.0867	-1.593	-1.078	.0396	124	3	.0029
.047	.0847	-1.577	-0.990	.1662	127	3	.0059
.059	.1407	-2.268	-2.228	.0149	77	3	.0089
.069	.1456	-9.050	-2.953	.9464	76	3	.0100
.072	.1448	-4.817	-2.935	1.7158	75	3	.0126
.083	.1499	-5.720	-4.043	1.9388	72	3	.0138
.089	.1249	-5.671	-4.240	2.1970	50	3	.0176
.102	.2157	-6.697	-6.225	1.6157	48	3	.0274
.120	.2410	-6.932	-4.803	1.7173	65	3	.0374
.137	.3277	-7.128	-5.553	2.2395	34	3	.0474
.147	.2652	-7.302	-5.809	2.5600	61	3	.0572
.163	.2577	-7.312	-6.496	4.4486	31	3	.0626
.201	.4016	-8.072	-7.368	15.4506	28	2	.0638
.208	.5002	-9.108	-7.346	15.3410	22	2	.1087
.258	.5604	-9.046	-7.792	9.8643	20	2	.3054
.261	.4692	-8.159	-7.684	8.5348	24	2	.6945
.318	.7634	-8.627	-7.999	8.7978	15	2	.8072
.335	.6493	-8.026	-7.971	9.3693	17	2	.12113
.410	.9023	-7.784	-8.530	9.3457	12	2	.12113
.461	.8301	-7.396	-8.196	10.6590	14	2	.12113
.485	1.1651	-7.257	-8.000	8.2850	10	2	.12113
.558	1.1154	-6.907	-7.989	8.1767	10	2	.12113
.609	1.4479	-2.301	-2.699	3.9912	355	2	.12113
.614	1.3498	-2.104	-2.593	7.9022	381	2	.12113
.625	1.2498	-2.911	-2.649	12.4640	411	2	.12113
.639	1.1493	-3.108	-3.305	8.9572	447	2	.12113
.651	1.4130	-6.621	-7.569	18.8220	9	2	.12113
.791	1.7784	-6.461	-7.643	13.1230	7	2	.12113
.816	1.4484	-6.665	-7.947	9.2584	8	2	.12113
.922	2.2125	-6.121	-5.988	9.8555	232	2	.12113
.930	1.8593	-7.224	-7.586	11.7060	7	2	.12113
.974	2.1438	-5.763	-5.732	8.7001	240	2	.12113
1.035	2.2759	-7.770	-7.716	9.1613	4	2	.12113
1.061	2.0810	-5.760	-5.908	7.2443	247	2	.12113
1.130	2.0343	-5.721	-5.274	6.5197	252	2	.12113
1.131	2.7147	-8.048	-8.069	18.9830	55	3	.12113
1.147	3.3775	-5.755	-5.034	4.7574	153	3	.12113
1.149	2.5983	-8.294	-5.732	5.3803	5	2	.12113
1.158	3.4048	-5.939	-5.014	4.2078	151	3	.12113
1.164	3.0984	-8.407	-8.156	5.1394	4	2	.12113
1.165	3.6147	-8.615	-8.393	3.5742	3	2	.12113
1.171	4.1430	-8.376	-8.238	5.9491	3	2	.12113
1.174	3.3775	-5.584	-5.009	3.5796	148	3	.12113
1.199	3.4048	-5.644	-4.902	2.3298	147	3	.12113
2.148	5.1549	-5.659	-5.000	1.9459	100	3	.12113
2.458	5.4077	-5.213	-4.834	1.6841	96	3	.12113
2.554	4.5971	-8.223	-7.967	12.7750	3	2	.12113
2.893	5.7840	-5.474	-4.496	1.3013	90	3	.12113
3.278	7.8884	-4.961	-4.035	1.1929	64	3	.12113
3.578	6.3678	-4.553	-3.398	1.2375	81	3	.12113
3.704	8.5889	-4.583	-2.990	1.1685	60	3	.12113
4.132	2.0659	-8.298	-7.857	1.6460	16	2	.12113
4.1263	2.1263	-8.278	-7.857	1.6460	16	2	.12113
4.1263	2.1263	-8.278	-7.857	1.6460	16	2	.12113

Station 15

4.361	2.1805	.8120	.7510	7.9172	26.3240
4.822	9.1822	.2229	1.4264	5.3275	5.0820
5.004	12.0043	.2317	1.4221	1.9593	5.1006
6.200	13.6407	.3215	2.05	1.0847	5.3413
6.259	11.2658	.3351	2.579	1.0604	5.8346
7.072	3.5362	.7649	7.204	6.0195	6.0280
7.638	18.3293	.3935	2.811	1.0363	7.2299
8.016	16.0725	.3518	2.867	1.3755	8.4245
9.847	21.4647	.4667	3.178	1.3291	18.1850
11.073	19.9318	.5362	4.945	3.9710	20.7970
11.657	27.9775	.5365	4.8584	3.5122	26.6420
13.394	26.7874	.7171	6.871	2.9993	42.7680
15.640	34.4950	.8019	7.980	2.7201	28.7740
17.793	42.7022	.8293	7.702	4.2544	75.1650
19.591	35.2634	.8341	7.858	7.0559	106.5500
22.323	44.6449	.8528	8.049	5.6676	124.0500
24.840	54.6478	.8646	8.267	13.410	140.1300
27.157	65.1753	.8934	8.601	8.4380	141.8400
34.661	62.3908	.9608	9.524	14.0560	130.5000
37.205	74.4103	.9634	9.557	16.0240	158.3100
39.452	86.7980	.9668	9.598	15.4770	168.6500
41.451	99.4327	.9674	9.640	17.2510	180.9400
61.323	110.3826	.9596	9.569	58.8160	171.7800
62.008	124.0154	.9594	9.569	58.8160	126.9200
62.461	137.8512	.9596	9.569	58.8160	52.9090
63.257	151.8395	.9599	9.584	44.4070	132.7500
99.522	218.9381	.9424	9.485	8.9943	115.8000
103.346	206.6927	.9424	9.485	8.9943	83.2470
108.495	195.2934	.9424	9.485	8.9943	66.4500
159.331	79.9169	.9074	9.143	8.3935	90.7570
257.573	129.7880	.7445	7.893	6.5612	70.4710
275.588	137.7942	.7445	7.893	6.5612	146.7000
300.454	150.2246	.7445	7.893	6.5612	1267.6000
					1229.4000
					1422.4000
					1356.4000
					1478.4000

Station 15, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATE ANG	ZX	ZY	ZMAX
.025	.0604	.5701	3	325	.0021	.0024	.0000
.026	.0562	.9776	3	320	.0027	.0023	.0000
.026	.0507	.5077	3	320	.0033	.0051	.0000
.026	.0520						

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATE ANG	ZX	ZY	ZMAX
.025	.0604	.5701	3	325	.0021	.0024	.0000
.026	.0562	.9776	3	320	.0027	.0023	.0000
.026	.0507	.5077	3	320	.0033	.0051	.0000
.026	.0520						

Station 15, cont'd.

## ACCELERATED APPARENT RESISTIVITIES

PERIOD	SANDWIDTH	EY PRED EX	EY PRED EY	APPARENT RESISTIVITIES
-0.025	-0.604	-0.162	-0.841	-5.688
-0.026	-0.562	-0.920	-0.880	-7.279
-0.027	-0.521	-0.971	-0.825	-1.099
-0.028	-0.479	-0.937	-0.944	-5.923
-0.029	-0.922	-0.389	-0.744	-1.963
-0.030	-0.813	-0.602	-0.608	-4.682
-0.031	-0.843	-0.614	-0.614	-4.556
-0.032	-0.848	-0.614	-0.614	-4.417
-0.033	-0.47	-0.521	-0.992	-4.357
-0.034	-0.59	-1.407	-0.904	-1.635
-0.035	-0.64	-1.419	-0.925	-1.447
-0.036	-0.72	-1.447	-0.919	-1.324
-0.037	-1.02	-1.500	-0.923	-1.527
-0.038	-0.83	-2.148	-0.848	-5.026
-0.039	-0.89	-2.253	-0.939	-1.835
-0.040	-1.02	-2.911	-0.950	-1.986
-0.041	-1.37	-3.278	-0.956	-1.906
-0.042	-1.47	-2.653	-0.949	-1.924
-0.043	-1.63	-3.579	-0.945	-1.924
-0.044	-2.01	-9.018	-0.920	-1.924
-0.045	-2.08	-5.004	-0.939	-1.924
-0.046	-2.258	-2.911	-0.945	-1.924
-0.047	-2.61	-4.694	-0.979	-1.924
-0.048	-3.13	-7.638	-0.995	-1.924
-0.049	-3.35	-6.697	-0.997	-1.924
-0.050	-4.10	-9.027	-0.968	-1.924
-0.051	-4.61	-8.305	-0.945	-1.924
-0.052	-4.86	-1.1657	-0.917	-1.924
-0.053	-5.58	-1.1161	-0.9213	-1.924
-0.054	-6.04	-1.4498	-0.919	-1.924
-0.055	-6.14	-1.3498	-0.9155	-1.924
-0.056	-6.25	-1.2478	-0.9287	-1.924
-0.057	-6.39	-1.1498	-0.9559	-1.924
-0.058	-6.52	-1.9337	-0.8240	-1.924
-0.059	-7.74	-1.7793	-0.8520	-1.924
-0.060	-8.16	-1.9693	-0.8543	-1.924
-0.061	-9.22	-2.0128	-0.8035	-1.924
-0.062	-9.30	-1.0602	-0.8655	-1.924
-0.063	-9.74	-2.1438	-0.7437	-1.924
-0.064	-1.035	-2.2770	-0.6564	-1.924
-0.065	-1.041	-2.0830	-0.7520	-1.924
-0.066	-1.120	-2.0343	-0.7842	-1.924
-0.067	-1.132	-2.7157	-0.8502	-1.924
-0.068	-1.407	-3.3775	-0.7886	-1.924
-0.069	-1.44	-3.5996	-0.6428	-1.924
-0.070	-1.548	-3.4048	-0.7898	-1.924
-0.071	-1.550	-3.1004	-0.8483	-1.924
-0.072	-1.649	-3.6120	-0.8483	-1.924
-0.073	-1.727	-4.1451	-0.8451	-1.924
-0.074	-1.736	-3.4716	-0.7550	-1.924
-0.075	-1.999	-3.5991	-0.7474	-1.924
-0.076	-2.146	-5.1549	-0.7417	-1.924
-0.077	-2.458	-5.4077	-0.7367	-1.924
-0.078	-2.555	-6.165	-0.6498	-1.924
-0.079	-2.584	-7.727	-0.1451	-1.924
-0.080	-2.611	-5.1674	-0.7143	-1.924
-0.081	-2.636	-5.7436	-0.7143	-1.924
-0.082	-2.693	-6.3247	-0.6903	-1.924
-0.083	-3.278	-5.7860	-0.7522	-1.924
-0.084	-3.532	-7.8644	-0.7366	-1.924
-0.085	-3.7678	-6.3678	-0.7004	-1.924
-0.086	-3.771	-3.2771	-0.5646	-1.924
-0.087	-3.771	-5.283	-0.5646	-1.924
-0.088	-3.771	-5.283	-0.5646	-1.924
-0.089	-3.771	-5.283	-0.5646	-1.924
-0.090	-3.771	-5.283	-0.5646	-1.924
-0.091	-3.771	-5.283	-0.5646	-1.924
-0.092	-3.771	-5.283	-0.5646	-1.924
-0.093	-3.771	-5.283	-0.5646	-1.924
-0.094	-3.771	-5.283	-0.5646	-1.924
-0.095	-3.771	-5.283	-0.5646	-1.924
-0.096	-3.771	-5.283	-0.5646	-1.924
-0.097	-3.771	-5.283	-0.5646	-1.924
-0.098	-3.771	-5.283	-0.5646	-1.924
-0.099	-3.771	-5.283	-0.5646	-1.924
-0.100	-3.771	-5.283	-0.5646	-1.924
-0.101	-3.771	-5.283	-0.5646	-1.924
-0.102	-3.771	-5.283	-0.5646	-1.924
-0.103	-3.771	-5.283	-0.5646	-1.924
-0.104	-3.771	-5.283	-0.5646	-1.924
-0.105	-3.771	-5.283	-0.5646	-1.924
-0.106	-3.771	-5.283	-0.5646	-1.924
-0.107	-3.771	-5.283	-0.5646	-1.924
-0.108	-3.771	-5.283	-0.5646	-1.924
-0.109	-3.771	-5.283	-0.5646	-1.924
-0.110	-3.771	-5.283	-0.5646	-1.924
-0.111	-3.771	-5.283	-0.5646	-1.924
-0.112	-3.771	-5.283	-0.5646	-1.924
-0.113	-3.771	-5.283	-0.5646	-1.924
-0.114	-3.771	-5.283	-0.5646	-1.924
-0.115	-3.771	-5.283	-0.5646	-1.924
-0.116	-3.771	-5.283	-0.5646	-1.924
-0.117	-3.771	-5.283	-0.5646	-1.924
-0.118	-3.771	-5.283	-0.5646	-1.924
-0.119	-3.771	-5.283	-0.5646	-1.924
-0.120	-3.771	-5.283	-0.5646	-1.924
-0.121	-3.771	-5.283	-0.5646	-1.924
-0.122	-3.771	-5.283	-0.5646	-1.924
-0.123	-3.771	-5.283	-0.5646	-1.924
-0.124	-3.771	-5.283	-0.5646	-1.924
-0.125	-3.771	-5.283	-0.5646	-1.924
-0.126	-3.771	-5.283	-0.5646	-1.924
-0.127	-3.771	-5.283	-0.5646	-1.924
-0.128	-3.771	-5.283	-0.5646	-1.924
-0.129	-3.771	-5.283	-0.5646	-1.924
-0.130	-3.771	-5.283	-0.5646	-1.924
-0.131	-3.771	-5.283	-0.5646	-1.924
-0.132	-3.771	-5.283	-0.5646	-1.924
-0.133	-3.771	-5.283	-0.5646	-1.924
-0.134	-3.771	-5.283	-0.5646	-1.924
-0.135	-3.771	-5.283	-0.5646	-1.924
-0.136	-3.771	-5.283	-0.5646	-1.924
-0.137	-3.771	-5.283	-0.5646	-1.924
-0.138	-3.771	-5.283	-0.5646	-1.924
-0.139	-3.771	-5.283	-0.5646	-1.924
-0.140	-3.771	-5.283	-0.5646	-1.924
-0.141	-3.771	-5.283	-0.5646	-1.924
-0.142	-3.771	-5.283	-0.5646	-1.924
-0.143	-3.771	-5.283	-0.5646	-1.924
-0.144	-3.771	-5.283	-0.5646	-1.924
-0.145	-3.771	-5.283	-0.5646	-1.924
-0.146	-3.771	-5.283	-0.5646	-1.924
-0.147	-3.771	-5.283	-0.5646	-1.924
-0.148	-3.771	-5.283	-0.5646	-1.924
-0.149	-3.771	-5.283	-0.5646	-1.924
-0.150	-3.771	-5.283	-0.5646	-1.924
-0.151	-3.771	-5.283	-0.5646	-1.924
-0.152	-3.771	-5.283	-0.5646	-1.924
-0.153	-3.771	-5.283	-0.5646	-1.924
-0.154	-3.771	-5.283	-0.5646	-1.924
-0.155	-3.771	-5.283	-0.5646	-1.924
-0.156	-3.771	-5.283	-0.5646	-1.924
-0.157	-3.771	-5.283	-0.5646	-1.924
-0.158	-3.771	-5.283	-0.5646	-1.924
-0.159	-3.771	-5.283	-0.5646	-1.924
-0.160	-3.771	-5.283	-0.5646	-1.924
-0.161	-3.771	-5.283	-0.5646	-1.924
-0.162	-3.771	-5.283	-0.5646	-1.924
-0.163	-3.771	-5.283	-0.5646	-1.924
-0.164	-3.771	-5.283	-0.5646	-1.924
-0.165	-3.771	-5.283	-0.5646	-1.924
-0.166	-3.771	-5.283	-0.5646	-1.924
-0.167	-3.771	-5.283	-0.5646	-1.924
-0.168	-3.771	-5.283	-0.5646	-1.924
-0.169	-3.771	-5.283	-0.5646	-1.924
-0.170	-3.771	-5.283	-0.5646	-1.924
-0.171	-3.771	-5.283	-0.5646	-1.924
-0.172	-3.771	-5.283	-0.5646	-1.924
-0.173	-3.771	-5.283	-0.5646	-1.924
-0.174	-3.771	-5.283	-0.5646	-1.924
-0.175	-3.771	-5.283	-0.5646	-1.924
-0.176	-3.771	-5.283	-0.5646	-1.924
-0.177	-3.771	-5.283	-0.5646	-1.924
-0.178	-3.771	-5.283	-0.5646	-1.924
-0.179	-3.771	-5.283	-0.5646	-1.924
-0.180	-3.771	-5.283	-0.5646	-1.924
-0.181	-3.771	-5.283	-0.5646	-1.924
-0.182	-3.771	-5.283	-0.5646	-1.924
-0.183	-3.771	-5.283	-0.5646	-1.924
-0.184	-3.771	-5.283	-0.5646	-1.924
-0.185	-3.771	-5.283	-0.5646	-1.924
-0.186	-3.771	-5.283	-0.5646	-1.924
-0.187	-3.771	-5.283	-0.5646	-1.924
-0.188	-3.771	-5.283	-0.5646	-1.924
-0.189	-3.771	-5.283	-0.5646	-1.924
-0.190	-3.771	-5.283	-0.5646	-1.924
-0.191	-3.771	-5.283	-0.5646	-1.924
-0.192	-3.771	-5.283	-0.5646	-1.924
-0.193	-3.771	-5.283	-0.5646	-1.924
-0.194	-3.771	-5.283	-0.5646	-1.924
-0.195	-3.771	-5.283	-0.5646	-1.924
-0.196	-3.771	-5.283	-0.5646	-1.924
-0.197	-3.771	-5.283	-0.5646	-1.924
-0.198	-3.771	-5.283	-0.5646	-1.924
-0.199	-3.771	-5.283	-0.5646	-1.924
-0.200	-3.771	-5.283	-0.5646	-1.924
-0.201	-3.771	-5.283	-0.5646	-1.924
-0.202	-3.771	-5.283	-0.5646	-1.924
-0.203	-3.771	-5.283	-0.5646	-1.924
-0.204	-3.771	-5.283	-0.5646	-1.924
-0.205	-3.771	-5.283	-0.5646	-1.924
-0.206	-3.771	-5.283	-0.5646	-1.924
-0.207	-3.771	-5.283	-0.5646	-1.924
-0.208	-3.771	-5.283	-0.5646	-1.924
-0.209	-3.771	-5.283	-0.5646	-1.924
-0.210	-3.771	-5.283	-0.5646	-1.924
-0.211	-3.771	-5.283	-0.5646	-1.924
-0.212	-3.771	-5.283	-0.5646	-1.924
-0.213	-3.771	-5.283	-0.5646	-1.924
-0.214	-3.771	-5.283	-0.5646	-1.924
-0.215	-3.771	-5.283	-0.5646	-1.924
-0.216	-3.771	-5.283	-0.5646	-1.924
-0.217	-3.771	-5.283	-0.5646	-1.924
-0.218	-3.771	-5.283	-0.5646	-1.924
-0.219	-3.771	-5.283	-0.5646	-1.924
-0.220	-3.771	-5.283	-0.5646	-1.924
-0.221	-3.771	-5.283	-0.5646	-1.924
-0.222	-3.771	-5.283	-0.5646	-1.924
-0.223	-3.771	-5.283	-0.5646	-1.924
-0.224	-3.771	-5.283	-0.5646	-1.924
-0.225	-3.771	-5.283	-0.5646	-1.924
-0.226</				

3.904	4.5889	6.901	-5.987	2.4702
4.147	9.1224	-9.630	-4.966	-5.666
4.706	8.6125	-9.630	-4.966	-5.666
4.521	8.1374	-9.630	-4.966	-5.666
4.822	9.6432	-9.630	-4.966	-5.666
5.009	12.0093	-6.4559	-5.348	2.5524
6.200	13.6407	-6.470	-5.226	2.2663
6.259	11.2656	-5.884	-5.206	4.7188
6.460	13.3298	-5.813	-5.223	4.6996
7.638	16.3298	-5.636	-4.5026	4.5213
8.036	16.0725	-5.316	-3.5915	3.5166
9.847	21.6647	-5.085	-3.0775	5.090
10.732	15.3662	-4.963	-3.0287	4.781
11.073	19.9318	-7.066	-5.939	6.7385
11.483	15.7415	-9.963	-9.781	6.6572
11.657	27.9775	-7.143	-5.683	3.1699
12.519	6.2594	-4.963	-4.781	6.6521
13.394	26.7874	-8.213	-7.634	2.4508
15.640	34.4980	-9.064	-8.504	3.7987
17.793	42.7022	-9.643	-9.301	4.1369
19.591	35.2634	-9.888	-9.752	3.1651
22.323	44.6449	-9.900	-9.791	2.9327
24.840	54.6470	-9.896	-9.815	2.6163
27.157	65.1763	-9.871	-9.784	3.1349
34.461	62.3908	-9.820	-9.743	4.9111
37.205	74.4103	-9.830	-9.751	4.8405
39.452	86.7980	-9.835	-9.752	4.5958
41.451	99.9827	-9.817	-9.712	3.7302
61.323	110.1826	-9.512	-9.994	2.7951
62.008	122.0156	-9.512	-9.994	2.7951
62.461	137.0512	-9.512	-9.994	2.7951
62.267	151.0895	-9.147	-9.300	3.3439
69.522	218.9201	-7.995	-8.566	1.9642
103.346	206.6927	-7.995	-8.566	1.9642
108.495	195.2934	-7.995	-8.566	1.9642
159.631	79.9169	-7.743	-7.121	2.2923
257.573	128.7880	-6.564	-5.585	2.0859
275.586	137.7942	-6.564	-5.585	2.0859
300.454	150.2246	-6.564	-5.585	2.0859

Station 16, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKINNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RV
.025	.0604	.0967	1	60	5.1483	9.9324	115.4800	1.334	.4479
.026	.0562	.1236	1	60	5.9040	10.6410	148.0900	1.1782	.5789
.027	.0521	.1296	1	60	6.7831	12.8540	211.2300	1.2396	.8604
.027	.0479	.0582	1	60	8.9423	17.0730	371.4500	1.4257	1.5514
.038	.0922	.1111	1	60	13.2610	21.4810	637.3100	1.3512	3.5454
.041	.0893	.1205	1	60	13.0420	21.3110	624.2700	1.3813	3.6879
.043	.0868	.0967	1	60	12.2990	20.2690	562.1100	1.3128	3.5658
.047	.0848	.0969	1	60	11.4260	19.1930	498.9100	1.2295	3.4692
.059	.1407	.1577	1	60	10.7540	18.0960	443.1100	1.3562	3.8402
.064	.1419	.1643	1	60	10.0600	17.2470	398.6700	1.3053	3.8363
.072	.1447	.1604	1	60	9.4704	16.7460	370.1300	1.2974	4.0566
.083	.1500	.1645	1	60	9.0503	16.4390	352.1600	1.3648	4.5031
.089	.2148	.1709	1	60	8.8191	16.0050	333.9400	1.3921	4.5852
.102	.2253	.2059	1	60	8.4863	15.2780	305.4400	1.4752	4.7813
.121	.2411	.2240	1	60	8.2684	15.0630	295.2700	1.6482	5.4704
.137	.3278	.2129	1	60	8.1940	14.8970	288.2600	1.6120	6.0632
.147	.2653	.2077	1	60	7.9345	14.5720	275.2900	1.8559	6.2596
.163	.3579	.1913	1	60	7.5677	14.3020	261.8100	1.8631	6.6541
.201	.4018	.1420	1	60	6.6343	12.8030	207.9400	1.7685	6.5867
.208	.5004	.1218	1	60	6.5385	12.5700	200.7600	1.7827	6.5886
.258	.5684	.0771	1	60	5.4517	11.3880	161.6300	1.6504	6.7007
.261	.4694	.0572	1	60	5.6814	11.2680	159.2500	1.6835	6.6222
.318	.7638	.0371	1	60	5.0557	10.0880	127.3300	1.6268	6.4771
.335	.6697	.0686	1	60	4.8413	9.7594	118.6800	1.5696	6.3785
.410	.9027	.1489	1	60	4.5340	8.6321	95.0710	1.6870	6.1148
.461	.8105	.2079	1	60	4.1593	7.8790	79.3790	1.5964	5.7285
.486	1.1657	.2529	1	60	4.1394	7.7169	76.6850	1.6645	5.7850
.550	1.1161	.3499	1	60	3.6840	7.2213	65.7180	1.5148	5.8207
.604	1.4498	.5401	3	55	.7174	.6635	.9549	.0422	.0532
.639	1.1498	.5822	3	60	1.5723	1.8384	5.8521	.3158	.4318
.652	1.4337	.4333	1	60	3.3672	6.7869	57.4000	1.4778	6.0034
.741	1.7793	.5389	1	60	3.1513	6.1957	48.3180	1.4725	5.6917
* 147	* 1.1229	.4966	3	45	1.4115	.9018	2.8057	1.6523	.6744
* 306	8.6125	.4966	3	45	1.4115	.9018	2.8057	1.7159	.7004
* 521	8.1174	.4966	3	45	1.4115	.9018	2.8057	1.8014	.7362
6.460	3.3298	.5026	3	45	1.4070	.8785	2.7513	2.6366	1.0274

Station 16, cont'd.

## NON-ROTATING APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EY PREC EY	EY PREC EY	SIZELINESS	POINTS IN BU	QUALITY	APPARENT RI	APPARENT RI
.025	.0664	.8284	.83774	.95923	.3076	355	3.2905	3.2905
.026	.0562	.8836	.88923	.3216	.3216	351	6.1571	6.1571
.027	.0521	.9946	.98967	.3364	.911	3029	6.3029	6.3029
.028	.0479	.9211	.90643	.3569	.947	9550	13.9550	12.3650
.029	.0422	.6959	.69220	.3887	.232	3350	40.3350	28.0130
.031	.0092	.9123	.90973	.9153	.240	4620	39.4620	29.7650
.042	.0369	.9123	.9140	.4812	.247	1320	37.1320	23.9550
.047	.0849	.9052	.9142	.5570	.252	4920	35.4920	23.7730
.059	.1497	.9447	.9480	.6474	.153	2140	46.2140	25.0770
.064	.1419	.9575	.9537	.6767	.151	1720	46.7410	22.1340
.072	.1447	.9629	.9566	.7706	.148	1710	39.1720	20.7710
.083	.1569	.9590	.9595	.9821	.149	9380	35.9380	20.9810
.089	.2148	.9649	.9605	.1903	.100	0750	38.0750	22.1420
.102	.2253	.9643	.9629	.1763	.96	9340	38.9340	22.7510
.121	.2411	.9734	.9666	.21718	.90	2140	46.2140	25.0770
.137	.3278	.9762	.9712	.25125	.66	6580	46.7410	29.6580
.147	.2632	.9732	.9645	.6071	.66	4340	52.1420	33.4340
.162	.23579	.9707	.9613	.9143	.60	7520	53.7520	35.4930
.201	.4910	.9693	.9796	.7288	.59	6640	56.6640	38.9580
.209	.5604	.9610	.9752	.3424	.59	6920	51.6920	44.5560
.255	.5684	.9473	.9159	.25550	.39	9730	50.9730	45.5500
.261	.4694	.9921	.9159	.9900	.46	4950	46.4950	48.55770
.218	.7428	.9311	.9108	.55550	.23	7650	42.7650	47.2050
.235	.66697	.9271	.9070	.77220	.33	1230	41.1230	44.8050
.410	.9027	.9199	.8889	.3940	.24	1940	41.1940	45.5950
.461	.0305	.9131	.9121	.6637	.27	9300	47.0520	47.9300
.466	.1657	.9145	.9145	.6629	.20	7360	49.3950	49.7360
.552	.11161	.9084	.9484	.0749	.20	0680	49.0680	50.0090
.553	.14490	.9084	.9484	.7339	.0815	3240	40.3240	40.8100
.604	.14490	.56559	.56559	.7339	.0815	3750	45.3750	46.6290
.612	.12491	.6527	.7787	.1371	.191	6920	43.6920	43.9920
.613	.2492	.6977	.8161	.3661	.206	9810	33.9810	46.9950
.632	.11492	.7771	.8164	.5278	.229	7720	36.7720	41.8970
.741	.14117	.9017	.8364	.3729	.16	9000	56.9000	50.0090
.816	.117793	.8626	.7956	.7953	.13	3240	52.3240	47.6290
.922	.2117	.8475	.6202	.2070	.16	3340	52.3340	53.6650
.930	.18602	.7999	.8281	.8749	.117	1920	44.2460	57.1920
.974	.1427	.7926	.8065	.9560	.12	0380	54.0380	55.1590
1.035	.22770	.7497	.77798	.7911	.121	8110	41.8530	42.7050
1.041	.117793	.8626	.7868	.2434	.11	0040	64.0040	52.2330
1.120	.20319	.7576	.7740	.6933	.124	3610	47.3610	56.3460
1.132	.0333	.7451	.7793	.8600	.127	4410	42.4410	58.0520
1.1407	.2117	.7784	.8111	.5945	.9	9910	42.9910	50.9780
1.1444	.3758	.7552	.7540	.0813	.77	1980	60.1980	65.5240
1.1547	.4031	.7535	.7534	.4375	.9	5310	39.5310	48.7050
1.1550	.1008	.7545	.8519	.8343	.76	0210	61.0210	54.5180
1.1649	.6165	.7451	.8711	.4906	.8	4930	41.4930	50.8320
1.1727	.1451	.7427	.8582	.7059	.6	0690	50.0690	59.7070
1.1735	.4699	.7319	.7397	.4906	.6	1110	32.1110	44.0110
1.1944	.5996	.7421	.8497	.4375	.75	7930	40.0240	44.5990
1.1949	.4031	.7535	.7534	.4069	.72	0210	61.0210	54.5180
2.147	.1525	.6583	.7123	.6632	.50	62.9140	54.0730	54.0730
2.157	.4048	.6406	.6406	.66670	.48	0320	49.0320	49.7070
2.555	.5992	.5599	.6984	.6159	.55	690	50.690	59.7070
2.584	.1674	.7427	.8582	.4906	.55	3420	32.3420	44.0110
2.611	.7438	.7319	.7397	.7413	.75	9840	39.9840	45.5020
2.626	.3267	.6781	.7042	.4331	.72	0210	61.0210	54.5180
2.692	.7034	.6583	.7123	.6632	.50	62.9140	54.0730	54.0730
3.277	.8641	.6090	.6685	.4212	.47	0830	47.0830	53.9090
3.536	.3646	.6609	.6609	.6799	.54	6210	40.6210	54.6210
		.62356	.5483	.4177	.51	6140	36.61510	46.6140

Station 17

3.002	0.5849	-5109	9.1224	9.1224	3.2329	31
4.147	-6014	-6014	2.9183	2.9183	4.120	31
4.106	-6014	-6014	2.9183	2.9183	4.120	31
4.521	0.6125	-6014	2.9183	2.9183	4.120	31
4.137	0.6125	-6014	2.9183	2.9183	4.120	31
4.619	9.6286	-5168	2.9239	2.9239	4.120	31
5.022	12.0034	-5113	2.9332	2.9332	4.120	31
5.197	13.6340	-4764	2.9096	2.9096	4.120	31
6.256	11.2640	-4836	2.0449	2.0449	4.120	31
6.640	3.3298	-5967	2.9847	2.9847	4.120	31
7.634	18.3211	-5427	1.9130	1.9130	4.120	31
8.032	8.0443	-6087	1.9050	1.9050	4.120	31
9.043	21.6539	-6501	1.9450	1.9450	4.120	31
10.732	5.3642	-6556	1.2151	1.2151	4.120	31
11.068	19.9219	-7852	1.3401	1.3401	4.120	31
11.483	5.7945	-6556	1.2151	1.2151	4.120	31
11.651	27.9637	-7944	1.0205	1.0205	4.120	31
12.519	6.2594	-6556	1.2151	1.2151	4.120	31
13.387	26.7745	-8243	1.8508	1.8508	4.120	31
15.633	34.3914	-8592	-8818	-8818	4.120	31
17.784	42.6821	-8812	-8895	-8889	4.120	31
19.681	35.2473	-8198	-8748	-8748	4.120	31
22.312	49.6229	-8142	-9114	-9114	4.120	31
24.828	54.6209	-8332	-9123	-9123	4.120	31
27.144	45.1464	-8472	-9198	-9198	4.120	31
34.694	62.3597	-8997	-9455	-9455	4.120	31
37.186	74.3716	-9081	-9492	-9492	4.120	31
39.432	6.6.7528	-9147	-9555	-9555	4.120	31
41.430	9.9.4332	-9176	-9557	-9557	4.120	31
41.293	11.0.3290	-9316	-9608	-9608	4.120	31
49.167	4.9.5810	-8887	-9250	-9250	4.120	31
102.662	51.0.0308	-8600	-9054	-9054	4.120	31
104.665	52.3314	-8446	-88680	-88680	4.120	31
164.736	-8546	-8645	-1.6257	-1.6257	4.120	31

Station 17, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RY
.025	.0604	.3076	1	103	25.4530	22.6280	1159.9000	3.2613	2.5775
.026	.0562	.3216	1	103	30.0790	26.0580	1583.8000	4.6258	3.4717
.026	.0521	.3364	1	103	35.3150	31.7750	2256.8000	6.4994	5.2574
.027	.0479	.3564	1	103	46.3380	43.2980	4021.9000	11.4300	9.9744
.028	.0422	.3887	1	103	61.9810	54.2960	6789.7000	29.5160	22.6510
.041	.0893	.4153	1	103	60.4740	51.2970	6288.5000	29.6970	21.3670
.043	.0868	.4812	1	103	57.2450	48.3910	5618.7000	28.4420	20.3240
.047	.0848	.5570	1	103	53.6960	45.8450	4985.0000	27.1540	19.7940
.604	1.4440	.0815	3	103	8.6746	12.8740	240.9800	7.0866	20.0130
.613	1.3491	.1871	2	103	11.4350	14.3710	337.3000	16.0380	25.3310
.625	1.2492	.3661	3	103	13.5190	16.1090	442.2500	22.8290	32.4160
.638	1.1492	.5278	3	103	16.1250	15.7980	509.6000	33.2030	31.4700
.974	2.1427	.5911	3	103	12.7500	13.6950	350.1100	31.6840	36.5360

Station 17, cont'd.

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PRED EI	EY PRED EY	SKEWNESS	POINTS IN BN	QUALITY	APPARENT RI
.025	.0644	-6407	-7232	.9619	355	2	2.6537
.026	.0562	-7079	-7802	.9719	381	2	1.9760
.026	.0521	.7313	.8195	.2492	411	2	19.2650
.027	.0479	.8077	.8797	.2100	447	37	4.2177
.028	.0422	.8812	.8484	.1730	232	125	11.3470
.041	.0893	.8978	.8094	.1270	240	129	35.1190
.042	.0868	.9020	.9048	.1091	247	131	33.3530
.042	.0849	.9048	.9087	.0935	252	131	31.1070
.047	.0847	.8856	.9021	.0282	252	137	28.8260
.059	.1407	.9152	.9340	.0152	153	151	13.4400
.064	.1419	.9161	.9147	.1194	151	151	29.2610
.072	.1497	.9053	.8552	.1730	148	138	27.1420
.082	.1509	.9020	.7237	.1503	144	138	23.6430
.089	.2149	.9087	.6994	.1683	100	139	17.7870
.102	.2253	.9060	.6160	.1641	96	139	16.9460
.121	.2911	.9157	.6518	.1265	90	160	16.6000
.127	.3278	.9225	.7206	.1162	64	173	18.9940
.147	.2653	.9245	.7644	.1372	61	183	22.5450
.163	.3579	.9244	.8803	.1920	60	210	28.3010
.201	.4019	.9085	.9297	.2423	54	246	24.8500
.208	.5004	.9188	.9313	.2530	44	260	25.0000
.218	.5684	.8726	.9203	.1852	39	214	29.0850
.261	.4694	.8918	.9191	.2069	44	226	29.0220
.318	.7639	.9723	.9131	.2922	28	236	27.8900
.335	.6697	.8944	.9206	.2874	33	256	24.9930
.410	.9027	.9753	.9387	.3278	24	384	29.1010
.461	.8305	.9773	.9378	.3570	27	384	29.2120
.486	.1.1657	.9797	.9453	.3502	20	396	32.5370
.558	1.1161	.9811	.9254	.3460	20	432	31.4900
.609	1.4490	.2479	.3882	.6714	178	37	2030
.613	1.3491	.3402	.4221	1.9117	191	57	.8510
.625	1.2492	.4927	.5297	1.0372	206	30	.3530
.638	1.1492	.6174	.5622	.8364	224	143	10.3240
.652	1.4317	.9842	.9145	.3795	16	450	10.8930
.741	1.7793	.9842	.9010	.3802	13	517	33.6490
.816	1.4693	.9736	.9022	.3737	16	582	34.6300
.922	2.2117	.7643	.5497	.4266	117	352	34.9790
.930	1.8602	.9642	.9081	.3826	12	620	21.0020
.974	2.1427	.9420	.5014	.4264	121	74	37.5200
1.035	2.2770	.9613	.9022	.3629	11	677	24.40
1.041	2.0818	.3902	.5038	.5035	124	103	40.1040
1.130	2.0333	.4445	.9744	.6721	127	133	10.1970
1.132	2.7157	.9498	.9115	.4226	19	620	11.9380
1.177	2.1758	.9417	.9417	.4226	12	620	42.7360
1.447	2.5946	.9449	.6772	.5003	9	148	12.0900
1.547	2.4031	.7144	.6208	.7394	76	622	44.7370
1.640	3.1008	.9419	.6664	.5062	124	220	22.0300
1.649	2.6165	.9394	.8641	.5414	6	619	22.2400
1.727	4.1451	.9445	.9346	.6371	6	619	24.8200
1.734	2.4499	.9449	.4773	.5687	75	218	25.6280
1.949	2.5974	.9449	.6468	.5268	5	735	38.2870
2.147	5.1525	.6208	.5106	.6207	5106	743	47.6220
2.457	5.4C94	.6489	.5317	.5317	50	751	33.7140
2.554	4.9442	.8698	.8448	.8448	8	712	22.1100
2.654	2.4499	.9445	.6468	.5268	5	751	39.1210
2.754	6.2267	.8848	.8648	.8725	5	712	22.0870
2.892	6.2267	.8794	.8794	.9736	4	223	35.5420
3.196	5.7936	.6485	.5466	.7750	45	223	24.4820
3.277	7.4649	.6482	.5451	.9845	36	267	24.4820
3.416	6.3646	.5745	.5745	.1.2214	304	267	26.0570
							27.1810

Station 18

26	1310
27	5100
28	697
29	9100
30	6125
31	8996
32	9025
33	8953
34	9025
35	8953
36	9025
37	9396
38	9025
39	9593
40	9593
41	9025
42	9593
43	9593
44	9593
45	9593
46	9593
47	9593
48	9593
49	9593
50	9593
51	9593
52	9593
53	9593
54	9593
55	9593
56	9593
57	9593
58	9593
59	9593
60	9593
61	9593
62	9593
63	9593
64	9593
65	9593
66	9593
67	9593
68	9593
69	9593
70	9593
71	9593
72	9593
73	9593
74	9593
75	9593
76	9593
77	9593
78	9593
79	9593
80	9593
81	9593
82	9593
83	9593
84	9593
85	9593
86	9593
87	9593
88	9593
89	9593
90	9593
91	9593
92	9593
93	9593
94	9593
95	9593
96	9593
97	9593
98	9593
99	9593
100	9593
101	9593
102	9593
103	9593
104	9593
105	9593
106	9593
107	9593
108	9593
109	9593
110	9593
111	9593
112	9593
113	9593
114	9593
115	9593
116	9593
117	9593
118	9593
119	9593
120	9593
121	9593
122	9593
123	9593
124	9593
125	9593
126	9593
127	9593
128	9593
129	9593
130	9593
131	9593
132	9593
133	9593
134	9593
135	9593
136	9593
137	9593
138	9593
139	9593
140	9593
141	9593
142	9593
143	9593
144	9593
145	9593
146	9593
147	9593
148	9593
149	9593
150	9593
151	9593
152	9593
153	9593
154	9593
155	9593
156	9593
157	9593
158	9593
159	9593
160	9593
161	9593
162	9593
163	9593
164	9593
165	9593
166	9593
167	9593
168	9593
169	9593
170	9593
171	9593
172	9593
173	9593
174	9593
175	9593
176	9593
177	9593
178	9593
179	9593
180	9593
181	9593
182	9593
183	9593
184	9593
185	9593
186	9593
187	9593
188	9593
189	9593
190	9593
191	9593
192	9593
193	9593
194	9593
195	9593
196	9593
197	9593
198	9593
199	9593
200	9593
201	9593
202	9593
203	9593
204	9593
205	9593
206	9593
207	9593
208	9593
209	9593
210	9593
211	9593
212	9593
213	9593
214	9593
215	9593
216	9593
217	9593
218	9593
219	9593
220	9593
221	9593
222	9593
223	9593
224	9593
225	9593
226	9593
227	9593
228	9593
229	9593
230	9593
231	9593
232	9593
233	9593
234	9593
235	9593
236	9593
237	9593
238	9593
239	9593
240	9593
241	9593
242	9593
243	9593
244	9593
245	9593
246	9593
247	9593
248	9593
249	9593
250	9593
251	9593
252	9593
253	9593
254	9593
255	9593
256	9593
257	9593
258	9593
259	9593
260	9593
261	9593
262	9593
263	9593
264	9593
265	9593
266	9593
267	9593
268	9593
269	9593
270	9593
271	9593
272	9593
273	9593
274	9593
275	9593
276	9593
277	9593
278	9593
279	9593
280	9593
281	9593
282	9593
283	9593
284	9593
285	9593
286	9593
287	9593
288	9593
289	9593
290	9593
291	9593
292	9593
293	9593
294	9593
295	9593
296	9593
297	9593
298	9593
299	9593
300	9593
301	9593
302	9593
303	9593
304	9593
305	9593
306	9593
307	9593
308	9593
309	9593
310	9593
311	9593
312	9593
313	9593
314	9593
315	9593
316	9593
317	9593
318	9593
319	9593
320	9593
321	9593
322	9593
323	9593
324	9593
325	9593

Station 18, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BALCONY DTH	SEALNESS	DUALITY	ROTATE ANG	ZI	ZY	ZMAX	RX	RY
.029	.0694	.4619	2	340	24.4970	16.6150	876.1800	3.0210	1.3896
.076	.0462	.2719	2	340	33.5060	22.2300	1616.9000	5.7399	2.5267
.026	.0421	.2492	2	340	43.5480	28.7280	2721.8000	9.8757	4.2979
.027	.0479	.2160	2	340	66.7640	40.2970	6081.3000	23.7270	8.6441
.028	.0422	.1726	2	340	112.5600	58.5740	16102.0000	97.3530	26.3610
.041	.0693	.1270	2	340	111.9400	57.7900	15870.0000	101.7500	27.1190
.043	.0666	.6925	1	340	108.1600	54.7170	14692.0000	101.5300	25.9850
.047	.0648	.0282	2	340	102.4700	51.5640	13159.0000	98.8900	25.0410
.059	.1467	.1194	1	340	97.7380	48.9000	11944.0000	112.0300	28.0420
.064	.1419	.1792	1	340	90.9920	43.7010	10189.0000	106.7800	24.6310
.072	.1447	.2042	1	340	83.5460	36.4280	8306.9000	100.9700	19.1960
.083	.1506	.1503	2	340	79.4580	24.6530	6921.4000	105.2000	10.1270
.089	.2149	.1683	2	340	77.4560	22.6030	6510.3000	107.3800	9.1448
.102	.2253	.1641	2	345	74.8070	16.2460	5860.0000	114.6300	5.4061
.121	.2411	.1265	2	345	73.2870	16.7130	5650.3000	129.4900	6.7341
.137	.3278	.5162	2	345	72.3730	18.9160	5595.7000	143.1000	9.7755
.147	.2653	.1372	2	345	71.6210	21.3840	5586.8000	151.2200	13.4810
.163	.3579	.1920	1	340	69.4600	27.5160	5581.9000	156.9600	24.6310
.201	.4018	.2423	1	340	68.3660	26.7650	5330.3000	187.8000	28.7850
.208	.5004	.2530	1	340	68.5390	26.4100	5395.1000	195.8800	29.0850
.258	.5684	.1852	1	340	50.0370	24.5790	3107.8000	129.3600	31.2140
.261	.4694	.2069	1	340	51.1970	24.3880	3215.9000	136.7100	31.0220
.318	.7638	.2922	2	340	44.3320	22.4750	2470.5000	125.0900	32.1480
.335	.6697	.2879	2	340	46.0290	21.5140	2581.6000	141.8900	30.9940
.410	.9027	.3278	2	340	54.7160	19.7740	3385.6000	245.6800	32.1510
.461	.8305	.3570	1	340	52.2960	18.8180	3089.0000	252.3700	32.6770
.486	1.1657	.3502	1	340	52.0520	18.7020	3059.1000	263.2000	33.9790
.598	1.1161	.3460	1	340	49.3650	17.2520	2734.6000	271.9900	33.2210
.652	1.4337	.3795	1	340	46.8330	16.1750	2454.9000	285.8600	34.1010
.741	1.7793	.3802	2	340	45.2100	15.7350	2291.6000	303.0600	36.7110
.816	1.4643	.3737	2	340	42.8540	15.2470	2068.9000	299.8200	37.9510
.922	2.2117	.4266	3	345	26.4290	6.2597	737.6800	128.7900	7.2219
.930	1.8602	.3826	2	340	41.8720	14.5280	1964.3000	326.1400	39.2675
.974	2.1427	.4264	3	320	2.8003	7.4181	62.8700	1.5273	10.7140
1.035	2.2770	.3829	2	340	41.0110	14.2770	1885.8000	348.1600	42.1960
1.041	2.0819	.5035	3	320	3.7168	6.6920	58.5970	2.8761	4.3235
1.132	2.7157	.4226	2	340	36.8180	14.2960	1559.9000	306.7700	46.2450
1.444	2.5996	.5003	1	340	32.6170	11.9190	1205.9000	307.2900	41.0340
1.550	3.1004	.5062	1	340	32.4350	11.6990	1188.9000	326.1700	42.9320
1.644	3.6165	.5414	1	340	31.7210	11.5480	1139.6000	330.8200	43.8460
7.634	18.3211	.3854	3	340	7.7720	1.5358	62.7630	92.2220	3.6513
8.032	16.0645	.4447	2	335	13.4360	2.7779	188.2400	290.6100	12.3470
9.843	21.6539	.3775	2	340	18.9620	4.3571	378.5300	707.7800	37.3720
11.068	19.9219	.4913	3	335	18.0900	4.7166	349.5000	724.4100	44.2440
11.651	27.9634	.4589	3	335	18.8530	5.0277	380.7000	828.2500	54.7040
13.387	26.7745	.4179	3	335	18.4640	4.2053	358.5900	912.7400	47.3500
15.633	34.3914	.4320	3	335	17.0640	4.0120	307.2600	910.3400	50.3240
17.784	42.6821	.4417	3	335	16.9350	3.9298	302.2100	1020.1600	54.7840
19.581	35.2473	.4270	2	335	15.2580	3.7269	246.7000	911.7600	54.3340
22.312	44.6229	.3229	2	340	14.3700	3.3268	217.5600	921.4600	54.1460
24.828	54.6209	.2490	2	340	12.6770	2.7508	168.2800	798.0700	37.5710
27.144	65.1466	.2341	1	340	12.3170	2.4933	157.9300	823.5400	33.7430
34.644	62.3597	.0887	1	340	10.7230	1.5942	117.5300	746.7100	17.8260
37.186	74.3716	.0843	1	340	10.8390	1.4728	119.6500	873.7200	16.3320
39.432	86.7528	.0889	1	340	10.0830	1.4157	103.6700	801.7700	14.4070
41.430	94.4332	.2897	2	340	9.0735	1.1229	83.5400	692.1800	10.4440

Station 18, cont'd.

SISTEMAS DE ESTIMACIONES - 1

APPARENT RX	QUALITY	IN SW	POINTS	SUPERFICIES
2.9983	1	1.1888	355	.5692
4.1336	1	1.1701	381	.5875
6.3746	1	1.1630	411	.5926
11.3400	1	1.3143	447	.5310
27.9820	1	1.3201	232	.5491
24.6310	1	1.5785	148	.6169
22.7840	1	1.2553	240	.6891
21.1630	1	1.1917	247	.6929
21.1630	1	1.3276	252	.5351
17.3740	1	1.0	153	.4853
14.0720	1	1.3276	151	.5467
17.3740	1	1.2553	148	.6477
19.1720	1	1.1917	144	.7863
22.4200	1	1.0	100	.0963
20.3040	1	1.2900	96	.0816
20.3040	1	1.8460	90	.0663
15.8120	1	1.7840	66	.0855
15.8120	1	1.6180	81	.0855
17.0620	1	1.6180	60	.9705
20.7200	1	1.1100	54	.9525
19.9220	1	1.1100	44	.8364
20.0210	1	1.4680	39	.8103
19.5100	1	1.5100	46	.7157
20.4710	1	1.4730	28	.6615
20.5710	1	1.4730	33	.5619
21.9110	1	1.4236	29	.4735
22.5910	1	1.6110	27	.4407
22.6910	1	2.2100	20	.3745
22.9148	1	2.2350	20	.1723
1.6163	1	1.6163	355	.3423
1.6157	1	1.3820	381	.5531
1.6157	1	1.3820	411	.6843
2.5463	1	2.5463	16	.3215
2.5463	1	2.5463	13	.2795
1.7744	1	1.7744	16	.2397
1.7744	1	1.7744	232	.0019
1.7744	1	1.7744	232	.2082
1.7744	1	1.7744	240	.3423
1.7744	1	1.7744	11	.1460
1.7744	1	1.7744	14	.3215
1.7744	1	1.7744	247	.1396
1.7744	1	1.7744	252	.1345
1.7744	1	1.7744	153	.0666
1.7744	1	1.7744	153	.2291
1.7744	1	1.7744	151	.0566
1.7744	1	1.7744	151	.1833
1.7744	1	1.7744	6	.1054
1.7744	1	1.7744	6	.0917
1.7744	1	1.7744	148	.0909
1.7744	1	1.7744	148	.2105
1.7744	1	1.7744	100	.5445
1.7744	1	1.7744	94	.3922
1.7744	1	1.7744	93	.1704
1.7744	1	1.7744	5	.1706
1.7744	1	1.7744	5	.1322
1.7744	1	1.7744	5	.4027
1.7744	1	1.7744	5	.5863
1.7744	1	1.7744	5	.4071

### Station 19

3.104	8.5089	1.5379	40	2	38.6010	113.2500
4.147	9.1224	-8091	-4	2	*2030.0000	163.6800
4.306	8.6125	-8501	-4	2	*4900.0000	190.7400
4.521	8.1374	-8501	-4	2	*0600.0000	200.2500
4.822	9.6432	-8922	-9035	2	4.2610	130.1700
5.004	12.0093	-8551	-9168	2	45.7070	134.4700
5.204	6.200	-8450	-9065	2	52.7420	151.9700
5.259	11.2658	-8433	-9099	2	51.2040	150.6200
6.660	3.3298	-6303	-8418	2	*6100.0000	303.4600
7.633	18.3298	-8215	-8800	2	51.0000	151.9700
8.036	16.0725	-8324	-8898	2	51.6580	151.9700
9.897	21.6647	-8954	-9348	2	57.0140	153.0000
10.712	5.3662	-9743	-8348	2	6.97250	256.4300
11.073	19.9313	-9296	-9600	2	*4000.0000	743.6700
11.493	5.7915	-9743	-8322	2	72.4950	199.3500
11.657	27.9775	-9350	-8348	2	*9640.0000	795.6800
12.519	6.2594	-4783	-9604	2	2.3123	20.2800
13.394	26.7874	-9565	-8348	2	82.2800	213.7400
15.640	34.4080	-9804	-9721	2	*3020.0000	867.4500
17.793	42.7022	-9871	-9779	2	48.0950	54.1470
19.591	25.2634	-9845	-9860	2	2.7072	49.0950
22.323	44.6449	-9858	-9859	2	2.5716	50.1040
24.840	59.6476	-9725	-9852	2	1.1901	39.8040
27.157	65.1763	-9666	-9821	2	3.0065	55.8210
34.661	62.3908	-9776	-9702	2	1.1901	41.7620
37.205	74.4103	-9792	-9716	2	2.3222	43.7200
39.452	84.4980	-9818	-9780	2	2.3123	49.1040
41.452	99.4827	-9843	-9772	2	2.1305	45.3640
41.323	110.3226	-9680	-9754	2	1.1901	49.3740
42.008	124.0156	-9680	-9754	2	1.1901	40.3600
42.661	137.8512	-9761	-9732	2	1.1901	32.6200
43.267	151.8395	-9658	-9748	2	1.1901	25.1020
49.522	216.9261	-9648	-9721	2	1.1901	109.6400
103.146	206.6927	-9648	-9721	2	1.1901	104.0600
108.495	195.2934	-9648	-9721	2	1.1901	87.5270
159.831	79.9169	-8654	-9400	2	1.1901	69.8450
257.573	128.7880	-8785	-9543	2	1.1370	72.9440
275.588	137.7794	-8785	-9543	2	-9005	195.5600
300.454	150.2246	-8785	-9543	2	-9005	1250.3000
				3		1815.5000
				3		1077.4000
				3		1942.4000
				3		11528.0000
				3		2117.7000
				3		12567.0000

Station 19, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SIGNALNESS	QUALITY	ROTATN ANG	ZY	RX	Q
.025	.0604	.5692	60	13.7560	23.0850	9524	2.4627
.026	.0562	.5075	60	15.7110	27.2990	992.0400	1.2620
.026	.0521	.5923	60	18.7080	32.9440	1435.3000	1.0226
.027	.0479	.5310	60	23.7490	43.2020	2430.4000	3.0023
.027	.0479	.5310	60	23.7490	43.2020	4102.3000	8.3125
.038	.0422	.5991	60	32.8920	54.9580	30.0000	23.2070
.059	.1407	.5251	60	22.4040	30.7880	1449.9000	5.0861
.064	.1419	.4893	60	20.4810	26.5980	1131.0000	5.3426
.072	.1447	.5667	60	20.4830	25.9220	1091.5000	6.0647
.410	.9027	.5619	55	16.1160	25.3560	902.4600	21.3150
.461	.8205	.7715	55	15.0070	24.6300	631.8400	20.7810
.486	1.1657	.4407	55	14.7350	24.6420	625.3100	21.0910
.558	1.1161	.2745	55	13.5290	23.4870	739.4500	20.4280
.604	1.4498	.1723	50	13.3304	23.90	1464.3	6.0132
.614	1.3498	.2423	50	16.1320	3.998	5356.0	.0064
.625	1.2990	.5521	50	1.2422	.7881	2.1642	.0134
.652	1.4337	.3215	1	50	12.5030	22.7200	672.5400
.741	1.7793	.2795	2	50	12.2910	22.0200	636.0200
.814	1.4643	.2297	2	45	11.6220	21.5910	601.2300
.930	1.8602	.2087	2	40	12.1810	21.6250	616.0100
1.035	2.2710	1.9460	2	25	13.1880	22.8570	696.3700
1.132	2.7157	1.7295	1	10	15.2960	29.8340	850.6800
1.444	2.5996	.2229	1	45	37.1770	17.8150	1699.1500
1.950	3.1009	.1823	1	65	92.3160	17.6400	2101.8000
1.644	3.6169	.1055	1	65	71.0530	16.3550	5316.0000
1.727	4.1451	.0917	1	335	15.4850	82.6150	7065.1000
2.595	4.5595	.1706	1	60	264.6700	13.8840	7029.4000
2.564	5.1474	.1706	1	40	264.6700	13.8840	7024.4000
2.411	5.7918	.1706	1	60	264.6700	13.8840	7024.4000
2.426	4.3267	.1322	2	335	16.2070	369.6400	6.6900
4.147	9.1224	.4090	2	70	763.4900	52.5170	3339.0000
4.125	8.6125	.4890	2	70	768.4900	52.5170	3339.0000
4.125	8.1274	.4890	2	70	768.4900	52.5170	3339.0000
4.640	3.3248	.4847	2	340	698.2200	4.9750	2972.4650

Station 19, cont'd.

## NORTH-ROTATED APPARENT RESISTIVITIES

P-FIND	BARNWICHTH	EX PRED ET	EX PRED FV	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RI
.025	.0604	.2689	.8683	3.9124	355	3	-3128
.026	.0562	.3129	.8772	4.1107	381	3	-4368
.026	.0521	.3352	.8664	4.5062	411	3	-6221
.027	.0479	.4788	.8870	4.9082	447	3	1.39AC
.038	.0922	.5274	.8106	7.2424	232	3	1.5879
.041	.0893	.5308	.8224	6.4161	240	3	2.0607
.043	.0866	.5423	.8284	6.0325	247	3	1.6289
.047	.0848	.5152	.8274	8.1457	252	3	1.7421
.059	.1407	.5476	.8845	11.3120	153	3	1.5213
.064	.1419	.5402	.9037	11.6770	151	3	1.3849
.072	.1447	.5108	.9147	10.6150	148	3	1.4119
.083	.1501	.5172	.9228	11.5110	144	3	1.2860
.089	.2149	.4900	.9205	10.4750	100	3	1.2602
.102	.2253	.5424	.9141	18.1140	96	3	1.9800
.121	.2411	.6172	.9123	67.5050	90	3	2.1076
.137	.3278	.6400	.9430	37.1300	66	3	1.3640
.147	.2653	.6298	.9408	27.2520	81	3	2.4316
.163	.3579	.6064	.9447	11.5270	60	3	1.4813
.201	.4018	.4902	.9397	10.0060	54	3	1.2666
.208	.5004	.4796	.9397	10.7590	44	3	1.9000
.256	.5684	.4824	.9440	20.7590	39	3	2.8794
.261	.4699	.4625	.9456	15.8420	44	3	3.2615
.318	.7638	.4819	.9491	13.2560	28	3	3.2581
.335	.6697	.5162	.9509	9.8645	33	3	3.2938
.410	.9027	.6349	.9556	6.5521	24	3	4.1853
.461	.8305	.6605	.9555	7.3528	27	3	4.7050
.486	.11657	.6916	.9586	7.5106	20	3	4.1099
.558	.11161	.7012	.9561	12.1150	20	3	6.8071
.604	.14410	.3659	.9203	2.1677	178	3	4.1532
.613	.13491	.4260	.5395	2.4008	191	3	10.5000
.625	.12492	.5164	.4581	2.5057	206	3	11.1950
.638	.14462	.5888	.7870	3.2146	224	3	16.8000
.652	.14337	.7151	.9562	16.9700	14	3	21.8116
.741	.17763	.7552	.9622	14.1720	13	3	25.4590
.816	.14693	.8208	.9693	13.6410	16	3	28.1170
.922	.22117	.7442	.9124	8.7143	117	3	10.6460
.930	.18602	.8281	.9738	11.0680	12	3	4.8029
.974	.21427	.7858	.9828	2.1036	121	3	9.5984
1.035	.22770	.8373	.9714	11.2140	11	3	32.8920
1.041	.20619	.7782	.8910	2.3473	124	3	24.2900
1.130	.20333	.7872	.8940	2.6714	127	3	40.4830
1.132	.227157	.8427	.9727	11.4570	9	3	10.8010
1.407	.31758	.8258	.9014	3.2196	77	3	51.7420
1.444	.25996	.7970	.9605	9.9936	9	3	11.3400
1.597	.34031	.9472	.9472	4.9790	76	3	11.8610
1.550	.31084	.7897	.9596	9.2903	8	3	90.4200
1.644	.36165	.6026	.9653	5.8449	6	3	86.1050
2.555	.45941	.8043	.9557	6.8420	6	3	49.6520
2.584	.34694	.8258	.9461	4.7222	75	3	14.2260
1.999	.25974	.8511	.9452	3.7022	72	3	12.0030
2.636	.32677	.8520	.9489	3.9257	50	3	13.1350
2.457	.54068	.6765	.9454	3.4729	48	3	13.6720
2.727	.45942	.8170	.9268	5.3766	55	3	11.9.0100
1.735	.34678	.8258	.9461	5.3766	55	3	14.2260
2.611	.7418	.8170	.9361	5.3766	55	3	26.9170
2.777	.57424	.8773	.9245	3.5652	45	3	11.2400
1.366	.7416	.8675	.9294	3.1476	34	3	22.6450
1.366	.7416	.8675	.9294	3.1476	34	3	26.8450
1.516	.45233	.9140	.9140	2.9140	41	3	14.1470

Station 20

3	902	149	2655
4	147	9.1224	.7635
4	204	8.4125	.7631
4	521	6.1374	.7631
4	819	9.6386	.7766
5	C02	12.0034	.7641
6	197	13.6340	.7105
6	256	11.2604	.6967
6	640	3.3298	.7577
7	634	16.1221	.6223
8	032	6.0522	.6446
9	843	21.6539	.6312
10	732	5.3662	.6567
11	068	19.9219	.7545
11	483	7.7415	.6590
11	451	27.9634	.7538
12	519	6.2594	.6590
13	387	26.7745	.8258
15	633	34.3914	.9264
17	784	42.6821	.9316
19	581	35.2473	.9676
22	312	22.4122	.9783
24	828	54.4620	.9764
27	144	65.1446	.9715
34	644	62.3597	.9712
37	146	74.3716	.9757
39	432	86.7526	.9780
41	430	.91.4322	.9779
49	328	49.4322	.9602
61	293	61.2930	.9751
49	167	49.5610	.9668
62	662	51.0306	.9666
64	665	52.3314	.9729
69	736	.8992	.7C95
71	6400	.5777	.6100
73	33	31.0280	149
74	3	37.1920	162
75	3	38.6230	170
76	4	40.5470	178
77	4	35.1980	174
78	4	36.9460	132
79	3	41.3090	125
80	2	40.3140	134
81	2	59.9890	261
82	2	40.5610	151
83	2	39.1300	125
84	2	42.2040	520
85	3	67.8280	391
86	3	60.6680	111
87	2	72.5720	419
88	2	55.7510	175
89	2	79.1180	457
90	2	56.1440	223
91	2	81.2270	223
92	3	94.2520	233
93	3	171.2700	232
94	2	110.4400	228
95	2	94.1450	229
96	2	101.8300	248
97	1	90.5470	220
98	1	88.4080	224
99	1	87.2760	216
100	1	107.2100	211
101	2	262.7900	450
102	2	300.4300	387
103	1	369.2100	398
104	1	376.6500	381
105	1	387.5600	6100

Station 20, cont'd.

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EX PRED EX	EY PRED EY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RI	APPARENT RI
.025	.0604	.7440	.8355	.2377	355	2	3.1073	3.9664
.026	.0562	.8018	.8620	.2535	381	2	3.8075	2.4225
.026	.0521	.8344	.8717	.2393	411	2	5.2757	3.4884
.027	.0479	.8781	.8800	.2636	447	2	8.2771	5.8398
.038	.0922	.8500	.7850	.1168	232	2	20.0570	12.7730
.041	.0893	.8751	.8471	.1691	240	1	18.7640	12.3100
.043	.0848	.8744	.8717	.2150	247	1	18.1260	12.0090
.047	.0848	.8606	.8790	.2863	252	1	16.9130	11.9090
.059	.1407	.8889	.9325	.3748	153	1	14.9990	12.3510
.064	.1419	.8893	.9407	.4503	151	1	13.5390	11.5190
.072	.1447	.8897	.9434	.5458	148	1	13.2110	11.6950
.083	.1500	.8891	.9442	.6165	145	1	13.4350	12.6100
.089	.2148	.8936	.9440	.7644	100	1	13.0750	12.5940
.102	.2253	.9095	.9518	.9579	96	1	12.7790	13.3160
.121	.2411	.9219	.9494	.9180	90	1	13.7330	14.1000
.137	.3278	.9275	.9522	.8821	66	1	14.4730	14.8920
.147	.2653	.9183	.9470	.8372	81	1	15.4250	15.6620
.163	.3579	.9060	.9348	.8509	60	1	16.5440	15.7550
.201	.4018	.8680	.9075	.4967	54	2	17.4380	17.8080
.208	.5004	.8621	.9051	.5069	44	2	17.5920	18.4210
.258	.5684	.8930	.8892	.4810	39	2	19.5400	19.2580
.261	.4694	.8424	.8902	.9607	46	2	19.3110	19.2620
.318	.7638	.8298	.8826	.5602	28	2	20.4800	21.9130
.335	.6697	.8335	.8845	.5095	33	2	21.3620	22.7700
.410	.9027	.8299	.8740	.4918	24	2	23.1640	25.5300
.461	.8305	.8293	.8752	.6289	27	2	24.8980	26.8190
.486	1.1657	.8248	.8776	.6987	20	1	26.3900	27.9100
.558	1.1161	.8423	.8822	.7959	20	2	26.8480	26.6210
.604	1.4498	.4528	.1682	.0196	355	3	8.7723	1.0430
.614	1.3498	.5305	.2289	.0494	381	3	12.2210	1.7287
.625	1.2498	.6341	.2858	.0453	411	3	17.1760	2.8696
.639	1.1498	.7341	.3994	.0617	447	3	22.9000	5.1578
.652	1.4337	.8377	.8743	.8365	16	1	28.4400	26.5530
.741	1.7793	.8551	.8725	.8510	13	2	29.7710	28.1810
.816	1.4693	.8088	.8620	.7013	16	2	30.4420	29.3020
.922	2.2128	.8933	.8913	.4605	232	2	39.6870	24.3220
.930	1.8602	.7619	.8331	.8036	12	2	32.3540	31.9200
.974	2.1438	.6581	.7301	1.5181	240	3	13.2220	10.6300
1.035	2.2770	.7110	.8154	.7147	11	2	31.1210	33.7640
1.041	2.0830	.6821	.7349	1.5085	247	3	18.0490	14.1890
1.130	2.0343	.7048	.7486	1.4148	252	3	22.7270	17.9650
1.132	2.7157	.6917	.8156	.8428	9	2	31.9820	34.3740
1.407	3.3775	.7223	.7708	1.5121	153	3	28.4900	22.3320
1.444	2.5996	.6822	.8372	.7552	9	2	33.0130	34.8300
1.548	3.4048	.8771	.8798	.8609	151	2	54.8530	38.5470
1.550	3.1004	.6863	.8406	.9005	8	2	33.8020	37.7570
1.644	3.6165	.7031	.8656	.8255	6	2	34.2370	38.0720
1.727	4.1451	.7034	.8786	.7526	6	2	35.5890	37.5510
1.736	3.4716	.8743	.8801	1.0064	148	2	57.7050	40.1570
1.999	3.5991	.8780	.8830	1.1946	144	2	60.5100	42.8690
2.148	5.1549	.8832	.8804	1.2818	100	2	62.9120	43.6100
2.458	5.4077	.8666	.8711	1.3866	96	2	63.4890	44.3870
2.555	4.5992	.6879	.8871	.7022	5	2	34.8910	39.7120
2.584	5.1674	.6879	.8871	.7022	5	2	35.2810	40.1530
2.611	5.7438	.6879	.8871	.7022	5	2	35.6520	40.5150
2.636	6.3267	.6735	.8848	.6901	9	2	33.4710	39.3660
2.893	5.7860	.8472	.8586	1.5616	90	2	45.5730	45.0040
3.278	7.8684	.8208	.8475	1.8099	66	3	61.5160	44.6290
3.538	6.3678	.7848	.8361	1.9635	81	2	63.1140	47.0160

Station 23

3.90*	8.5889	.7586	2.1247	.8146	.6510	.56 .8C45
4.147	9.1224	.6110	.8991	.7231	.45 .2540	.53 .3560
4.306	8.6125	.6110	.8991	.7231	.41 .8020	.55 .4080
4.521	8.1374	.6110	.8991	.7231	.43 .6850	.58 .1690
4.822	9.6432	.6056	.7802	.3.4611	.52 .4140	.48 .3790
5.004	12.0093	.6755	.7708	.3.4046	.52 .4840	.53 .3640
4.200	13.6407	.6064	.7313	.3.3117	.39 .33	.46 .7860
4.259	11.2658	.6089	.7261	.3.1386	.46 .33	.43 .1180
4.640	3.3298	.6078	.6964	.7153	.6 .23	.64 .7450
7.638	18.3298	.5188	.6910	.6082	.28 .33	.85 .7210
8.036	16.0255	.4881	.6766	.6436	.36 .120	.23 .9330
9.847	21.6647	.4897	.6832	.2.9106	.24 .33	.32 .8630
10.352	4.3662	.4046	.6641	.6091	.3 .3	.35 .6960
11.073	19.9218	.6689	.8081	.1.7619	.27 .33	.94 .8160
11.83	5.7404	.4046	.6641	.6091	.3 .3	.27 .8450
11.457	27.9775	.4550	.8123	.1.6116	.20 .33	.100 .8000
12.519	6.2594	.4046	.6641	.6091	.3 .3	.31 .7860
13.394	26.7874	.7178	.9210	.1.9660	.20 .2	.27 .1020
15.640	34.4080	.8943	.9733	.1.3845	.16 .3	.21 .7550
17.793	92.7022	.9367	.9830	.1.0967	.13 .3	.42 .6060
19.591	35.2624	.9654	.9904	.6071	.14 .3	.109 .6000
22.323	49.6449	.9711	.9904	.7079	.12 .3	.13 .9450
24.850	54.6478	.9766	.9892	.5665	.11 .3	.63 .7390
27.157	65.1763	.9791	.9886	.5420	.10 .3	.13 .6450
34.661	62.3908	.9854	.9818	.5871	.9 .2	.24 .5240
37.205	74.4103	.9854	.9831	.4998	.8 .2	.20 .0110
39.452	86.7980	.9869	.9877	.3712	.6 .2	.69 .2530
41.451	99.4827	.9869	.9909	.3812	.4 .2	.13 .9450
61.323	110.3824	.9874	.9922	.5168	.2 .2	.67 .8810
62.008	124.0154	.9874	.9922	.5168	.1 .2	.16 .7410
62.661	137.8512	.9874	.9922	.5168	.0 .2	.67 .2970
63.267	151.8395	.9864	.9927	.3962	.0 .2	.19 .4200
69.522	216.9381	.9854	.9858	.6656	.0 .2	.36 .1760
103.346	206.6927	.9854	.9858	.4636	.0 .2	.54 .1760
108.445	195.2934	.9854	.9858	.4636	.0 .2	.32 .1760
159.831	79.9169	.9085	.9308	.8678	.0 .2	.114 .9550
257.573	128.7880	.7986	.7733	.4157	.0 .2	.116 .1700
275.568	137.7942	.7986	.7733	.4157	.0 .2	.112 .1000
300.454	150.2246	.7986	.7733	.4157	.0 .2	.211 .7060

Station 23, cont'd.

## ROUTINER IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG
.025	.0604	2377	2	120
.026	.0562	2535	2	120
.026	.0521	2393	2	120
.027	.0479	2636	2	120
.028	.0422	1168	2	120
.041	.0868	1691	1	120
.047	.0848	2150	1	120
.059	.1407	2863	1	120
.064	.1419	3746	1	120
.064	.14503	4503	1	120
.072	.1447	5453	1	120
.201	.4018	4967	2	125
.208	.5004	5069	2	125
.258	.4810	4810	2	125
.261	.4667	4607	2	125
.318	.7638	5602	2	125
.335	.6697	5095	2	120
.410	.9027	4918	2	120
.604	.14498	0196	2	125
.614	.13498	0494	2	125
.625	.12498	0453	2	125
.639	.11498	0617	2	125
.922	.21228	4605	2	125
2 <sup>a</sup>	.840	54.6478	5665	3
27.157	.65.1763	5420	3	120
34.661	.62.3908	5871	2	115
37.205	.74.4103	4998	2	115
39.452	.66.7980	3712	2	115
41.451	.99.4827	3812	2	115
61.323	.110.3826	5168	3	115
62.008	.124.0156	5168	3	115
62.561	.137.8512	5168	3	115
63.267	.151.8395	3962	3	115

## NON-ROTATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EI PRED EI	EY PRED EY	SKINNESS	POINTS IN BW	QUALITY	APPARENT RI
.025	.0604	.8314	.9063	.7551	355	1	6.6618
.026	.0562	.8497	.9200	.7122	381	1	6.5816
.026	.0521	.8702	.9192	.7311	411	1	6.1556
.027	.0479	.8406	.9163	.6744	447	1	12.1700
.028	.0922	.7780	.8445	.8973	212	2	26.1700
.041	.0893	.8266	.8758	1.0703	240	1	33.8070
.043	.0864	.8423	.8857	1.1513	247	1	33.0210
.047	.0816	.8457	.8899	1.2548	252	1	32.3505
.059	.1407	.9161	.9332	1.4618	153	1	30.6750
.064	.1419	.9331	.9497	2.6289	90	1	27.4160
.072	.1447	.9358	.9534	2.9053	66	2	23.6680
.083	.1500	.9156	.9377	1.6761	148	2	28.6770
.089	.2100	.9148	.9139	1.8201	145	1	23.9845
.102	.2253	.9239	.9347	1.9588	100	1	23.2300
.121	.2411	.9398	.9497	2.3613	96	1	22.7560
.137	.3278	.9671	.9671	1.5681	151	1	21.1150
.147	.2653	.9643	.9662	1.5069	81	2	20.8840
.163	.3579	.9589	.9689	2.4060	60	1	22.6450
.201	.4018	.9350	.9350	1.3473	54	1	27.2870
.208	.5004	.9263	.9263	1.6674	57	2	20.9670
.258	.5484	.8311	.8757	4.3849	39	3	40.0090
.261	.4614	.8398	.8792	4.5799	46	2	20.4530
.318	.7638	.8086	.8160	4.6760	28	3	44.4920
.335	.6497	.8121	.8121	4.3835	33	3	46.9240
.410	.9027	.8608	.8642	8.0806	24	2	24.5720
.461	.8305	.8892	.8966	5.2589	27	2	16.7700
.486	1.1657	.9005	.9095	3.2924	20	2	57.2380
.558	1.1161	.9075	.9149	7.2513	20	2	16.7790
.604	1.4490	.6395	.6256	1.0254	176	2	22.7560
.613	1.3491	.7145	.6734	1.2410	191	2	45.4340
.625	1.2492	.7522	.7588	1.2619	206	2	11.4.2400
.628	1.1492	.7474	.8037	1.2542	224	2	14.5.2500
.652	1.4337	.8841	.8946	6.4861	16	1	14.6.2300
.741	1.7793	.8794	.8780	5.4893	13	1	11.1.4700
.816	1.4693	.8585	.8434	3.4622	16	1	14.9.1400
.912	2.2117	.7733	.6199	1.4977	117	1	351.2200
.930	1.8662	.8485	.8627	1.2619	206	2	104.6800
.974	2.1427	.7927	.7218	2.4918	12	2	16.7.4400
1.035	2.2770	.8743	.8713	1.4962	121	2	20.3.4100
1.041	2.0814	.7446	.6713	2.2140	11	2	17.5.0500
1.120	2.0333	.8114	.8242	1.9355	124	2	24.0.2400
1.132	2.7157	.8210	.8210	1.7506	127	2	20.4.6000
1.132	2.7157	.8484	.8730	2.1325	9	2	20.5.2500
1.132	2.7157	.9227	.9250	2.1740	77	3	26.6.8800
1.407	3.3758	.8040	.8407	1.4664	9	2	48.0.3500
1.444	2.5946	.8842	.9057	1.8882	72	3	55.0.4300
1.547	3.4031	.9298	.9390	1.9836	76	3	52.0.4800
1.550	3.1004	.8155	.8192	1.6443	78	3	67.9.1900
1.644	3.4165	.8210	.8729	1.7178	6	2	31.8.2400
1.727	4.1451	.8194	.8548	1.3036	6	2	33.7.1100
1.735	3.4349	.9103	.9238	1.9181	75	3	34.7.1600
1.999	3.5974	.8040	.8407	1.4664	75	3	52.8.5400
2.147	5.1525	.7546	.7546	1.5993	50	2	55.7.1300
2.457	5.4046	.6097	.6487	1.9362	48	2	34.3.2300
2.555	4.5992	.7279	.7279	1.7279	5	3	53.7.4100
2.584	5.1674	.7279	.7031	2.3181	5	3	36.7.1100
2.611	5.7706	.7279	.7031	2.3181	5	3	37.0.9600
2.636	6.3267	.7458	.6805	6.2859	4	3	55.0.8700
2.892	5.7834	.5971	.6101	1.1688	45	3	47.8.9100
3.277	7.8441	.5690	.5690	1.0204	74	3	41.6.3000
3.516	6.3646	.5909	.5909	1.0200	74	3	40.4.2100

Station 24

3.902	8.5899	.6043	.6081	1.0556	21	2	208.9500	403.6300
4.147	9.1224	.8859	.8653	1.3941	4	3	609.9100	601.8100
4.306	8.6125	.8859	.8653	1.3941	4	3	633.3700	624.9600
4.521	8.1374	.8859	.8653	1.3941	4	3	664.9300	656.1000
4.819	9.6386	.5624	.5713	1.0765	28	3	203.1300	319.8900
5.002	12.0034	.5696	.5669	1.1482	22	3	206.2600	307.8700
6.197	13.6340	.5015	.5345	2.0751	20	3	169.8000	253.4600
6.256	11.2604	.5145	.5448	1.7668	24	3	184.4100	260.3000
6.660	3.3298	.8829	.8619	1.4179	6	3	966.1700	960.1200
7.634	18.3211	.5469	.5898	2.4706	15	3	174.9400	259.3400
8.032	16.0645	.5229	.5163	3.1855	17	3	155.8100	207.7200
9.843	21.6539	.4961	.5370	4.4730	12	3	184.5100	210.0000
10.732	5.3662	.8778	.8046	.9580	3	3	654.6100	894.2400
11.068	19.9219	.8834	.7754	1.7983	14	2	275.9800	348.4900
11.463	5.7415	.8778	.8046	.9580	3	3	700.3900	956.7800
11.651	27.9634	.8858	.6251	2.9378	10	3	313.1300	403.9500
12.519	6.2594	.8778	.8046	.9580	3	3	763.5700	1043.1000
13.387	26.7745	.9133	.8516	2.3915	10	3	347.4400	475.6500
15.633	34.3914	.9530	.9192	3.2894	9	2	365.7000	719.5400
17.784	42.6821	.9662	.9407	3.6865	7	2	355.0900	919.4000
19.581	35.2473	.9595	.9296	1.9115	8	1	305.0500	342.7100
22.312	44.6229	.9462	.9247	1.9916	7	1	311.8600	335.5500
24.828	54.6209	.9392	.9138	1.3619	6	1	249.0000	276.7200
27.144	65.1466	.9442	.9131	1.1899	5	1	230.6300	238.8800
34.644	62.3597	.9577	.9546	.5117	5	3	130.6600	228.7400
37.186	74.3716	.9688	.9570	.4948	4	3	134.4700	262.1500
39.432	86.7528	.9778	.9691	.4533	3	3	132.7700	248.6200
41.430	99.4332	.9659	.9376	.3543	4	2	134.5900	269.5300
61.293	110.3290	.9859	.9346	.4192	3	2	162.5700	169.7800
99.167	9.5810	.9686	.8852	.2934	5	2	272.4400	270.1800
102.062	51.0308	.9686	.8852	.2934	5	2	280.4200	278.0800
104.665	52.3314	.9710	.8203	.1317	4	3	282.8800	198.7700
169.736	84.8680	.9799	.8222	.1391	3	3	242.5600	253.7200

Station 24, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	R <sub>X</sub>	R <sub>Y</sub>
34.644	62.3597	.5117	3	235	4.0258	4.4450	35.9650	112.3000	136.9000
37.186	74.3716	.4948	3	235	3.8183	4.4159	34.0800	108.4300	145.0300
39.432	86.7528	.4533	3	235	3.6176	4.1760	30.5270	103.2100	137.5400
41.430	99.4332	.3543	2	225	3.8679	3.4808	27.0770	123.9700	100.2900
61.293	110.3290	.4192	2	225	4.0395	3.0636	25.7040	200.0400	115.0600
49.167	49.5810	.2934	2	225	4.0606	3.0367	25.7100	327.0100	182.4900
102.062	51.0308	.2934	2	225	4.0606	3.0367	25.7100	336.5700	188.2300
104.665	52.3314	.1317	3	225	4.1691	2.6777	24.5510	363.8400	150.0900
164.736	84.8680	.1391	3	230	4.3649	3.0748	28.5070	646.7800	320.9600

Station 24, cont'd.

## NON-ROTATING APPARENT RESISTIVITIES

EFFING	RADIUS	EX PRED	FY PRED	EX PRED	FY PRED	SEEMLESS	POINTS IN BM	QUALITY	APPARENT
C24	.0633	-8324	-8710	-3634	-3634	1	1	1	2.7269
C26	.0562	-8674	-8940	-3911	-961	1	1	1	2.4222
C26	.0520	-9065	-9154	-9619	-9619	1	1	1	2.1663
C27	.0478	-9257	-9256	-3118	-3118	1	1	1	2.1669
C18	.0921	-8802	-8530	-4242	-59	1	1	1	3.1370
C41	.0892	-8774	-8703	-4050	-61	1	1	1	3.3677
C41	.0667	-8661	-8649	-3797	-62	1	1	1	4.4648
C41	.0646	-8676	-8676	-4191	-64	1	1	1	5.0515
C59	.105	-9336	-9343	-5617	-39	1	1	1	5.6266
C64	.1417	-9412	-9412	-5267	-29	1	1	1	6.0771
C72	.1444	-9429	-9429	-5646	-38	1	1	1	3.4550
C83	.1497	-9453	-9420	-5508	-36	1	1	1	3.1143
C89	.2145	-9521	-9495	-5974	-25	1	1	1	2.8662
C102	.2250	-9423	-8656	-3996	-29	1	1	1	2.8283
C120	.2407	-9526	-7611	-2825	-23	1	1	1	2.5466
C136	.3274	-9512	-7374	-1986	-18	2	2	1	1.9185
C147	.2649	-9177	-7423	-1757	-21	2	2	1	1.7202
C162	.3573	-9141	-7476	-2144	-16	2	2	1	1.8212
C201	.4012	-8962	-8927	-3704	-15	2	2	1	1.9660
C208	.4997	-8760	-8245	-2999	-11	1	1	1	1.7800
C258	.5675	-8713	-8326	-9160	-11	1	1	1	2.3750
C260	.687	-8561	-8507	1.0697	13	1	1	1	2.6213
C318	.7626	-8331	-8443	1.6241	8	1	1	1	2.8503
C334	.6887	-8570	-8670	1.4406	9	1	1	1	2.9219
C410	.9014	-8835	-9234	-7610	-15	2	2	1	2.6184
C461	.8293	-9234	-6671	-6766	-7	2	2	1	2.5205
C485	1.1640	-9367	-6338	-7304	-6	2	2	1	3.9026
C557	1.1145	-9469	-5581	-4682	-5	3	3	1	3.8488
C603	1.4476	-1575	-1163	-1.9627	-90	3	3	1	4.3770
C613	1.3478	-2412	-1017	-1.7538	-96	3	3	1	1.9033
C624	1.2460	-2936	-1793	-1.4250	-105	3	3	1	3.3664
C638	1.4381	-3824	-1801	-1.0967	-113	3	3	1	3.2445
C651	1.4316	-9373	-5124	-4909	-5	3	3	1	4.5452
C740	1.7766	-9295	-4862	-4706	-4	3	3	1	7.2666
C815	1.4672	-9016	-5422	-4173	-5	3	3	1	4.8817
C921	2.0296	-7236	-3235	-1279	-59	3	3	1	3.8659
C929	1.8575	-8891	-5615	-3946	-4	3	3	1	4.5778
C973	2.1406	-6406	-2270	-4230	-61	3	3	1	4.3090
C1033	2.2737	-7609	-5400	-4033	-4	3	3	1	3.2692
C1040	2.0799	-6070	-2819	-4253	-62	3	3	1	2.0120
C105	2.0313	-5692	-2969	-1285	-64	3	3	1	3.0470
C1405	3.3725	-5234	-3235	-3644	-39	3	3	1	2.9578
C1442	2.5958	-6707	-6216	1.2374	-3	2	2	1	1.7395
C1545	3.3999	-5434	-3423	-7681	-39	3	3	1	4.3090
C1733	3.4666	-5237	-2858	-7398	-38	3	3	1	6.5671
C1870	3.9351	-6670	-5875	-1.0586	-5	3	3	1	1.8852
C1997	3.5938	-4895	-2323	-1285	-64	3	3	1	3.5475
C2145	5.1475	-4671	-2021	-6326	-25	3	3	1	1.6919
C2454	5.3996	-4265	-2439	-3870	-24	3	3	1	3.8626
C2477	1.2283	-6355	-6006	1.9462	-4	3	3	1	1.5499
C2675	1.3375	-6909	-5875	-2.1729	-7	3	3	1	3.6204
C2889	5.7777	-3561	-2108	-6535	-36	3	3	1	3.2673
C3274	7.8567	-3386	-1902	-5801	-18	3	3	1	4.2582
C3532	6.3585	-3728	-1871	-7291	-21	3	3	1	3.9824
C3896	8.5763	-4462	-2038	-7928	-16	3	3	1	1.9666
C3993	1.9468	-7259	-6501	-2.7652	-2	2	2	1	1.0476
C4615	9.6293	-3696	-1954	-1.0788	-51	3	3	1	5.6246
C4997	11.6917	-3906	-2225	-1.1208	-11	3	3	1	4.0210
C4997	13.6206	-3077	-2575	-2.1711	-11	3	3	1	2.6266
C4997	13.6206	-3077	-2575	-2.1711	-11	3	3	1	1.4161

6.250	11.2494	.2740	.2537	2.1941	13	3	1.4200	1.7223
7.626	18.3030	.2953	.1612	2.5040	8	3	1.1791	1.6155
8.024	16.0488	.3253	.3128	2.0463	9	3	1.1823	2.2207
9.833	21.6328	.3113	.3626	1.6903	6	3	1.3296	3.0408
11.057	19.9025	.4504	.8110	.6620	7	3	1.2919	2.4124
11.640	27.9361	.4716	.8187	.6510	6	3	1.2951	2.5350
13.379	24.7480	.8158	.9412	.5832	5	2	2.7747	4.0828
15.617	34.3584	.7930	.9266	.2977	5	2	4.0680	4.2514
17.766	42.6903	.8052	.8115	.1361	4	1	7.2186	5.0005
19.563	35.2125	.8798	.8394	.1837	5	2	11.8950	6.3435
22.290	44.5792	.8936	.8380	.2163	4	2	13.9700	7.6132
29.804	54.5673	.8936	.8514	.2874	4	2	20.9730	6.9622
34.610	62.2975	.7184	.8574	.5765	3	2	12.5470	5.3537
44.883	22.4417	.5896	.7123	.2558	5	3	15.4720	7.3934
59.439	29.7203	.5799	.7269	.2607	4	3	20.1280	9.3103
69.197	32.0996	.5235	.7237	.2243	3	3	18.8280	8.9566
95.841	47.9226	.9369	.7151	.2547	2	3	15.7480	9.2221

Station 25, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKEWNESS	QUALITY	ROTATN ANG	ZX	ZY	ZMAX	RX	RY
.025	.0603	.3634	1	25	16.7370	10.8250	468.2700	1.7647	.5891
.026	.0562	.3911	1	25	21.9240	13.6570	667.1800	2.4539	.9523
.026	.0520	.4649	1	25	26.7180	16.3780	982.0900	3.7119	1.2945
.027	.0478	.3118	1	25	33.5730	20.8630	1562.4000	5.9911	2.0135
.038	.0921	.4242	1	25	43.6210	21.0540	2346.1000	14.5980	3.4008
.041	.0892	.4050	1	20	41.7180	20.3320	2153.8000	14.1120	3.3519
.043	.0867	.3797	1	20	37.0760	18.9280	1732.9000	11.9130	3.1050
.047	.0846	.4191	1	20	33.7520	17.5120	1445.9000	10.7130	2.8841
.059	.1405	.5617	1	25	30.6230	15.8280	1188.3000	10.9810	2.9337
.064	.1917	.5269	1	25	27.6150	13.9330	956.7300	9.8209	2.4999
.072	.1444	.5646	1	25	25.6850	12.5170	816.3900	9.5288	2.2631
.083	.1497	.65308	1	20	23.3140	11.1600	668.0800	9.0434	2.0721
.084	.2145	.5974	1	25	22.0110	10.6370	597.6200	8.6591	2.0223
.102	.2250	.3996	1	20	20.4920	8.8437	498.1300	8.5882	1.5997
.120	.2407	.2825	2	20	19.5190	5.8211	414.8900	9.1721	.8157
.136	.3274	.1986	2	20	18.4710	5.0350	366.5400	9.3075	.6916
.147	.2699	.1757	2	20	17.4740	5.0257	330.5900	8.9879	.7435
.162	.3573	.2144	2	20	17.3100	4.9346	323.9800	9.7333	.7910
.201	.4012	.3704	2	20	14.7310	6.0826	253.9900	8.7061	1.4844
.208	.4997	.2999	2	20	14.6540	5.7968	248.3300	8.9408	1.3992
.557	1.1145	.4682	3	25	8.6165	3.4408	86.0840	8.2746	1.3195
.651	1.4316	.4909	3	25	7.9516	2.8651	71.4370	8.2287	1.0684
.740	1.7766	.4708	3	25	7.3286	2.5997	60.4670	7.9517	1.0006
.815	1.4672	.4173	3	20	7.1966	2.5353	58.2180	8.4430	1.0478
.921	2.2096	.1279	3	20	3.5822	1.3897	14.7630	2.3628	.3556
.929	1.8575	.3946	3	20	6.7954	2.6998	53.4660	8.5775	1.3539
.973	2.1406	.4230	3	30	2.6647	.7399	7.6484	1.3818	.1065
1.040	2.0799	.4253	3	25	2.4818	.8759	6.9266	1.2811	.1596
1.128	2.0313	.1285	3	25	2.2476	.8839	5.8331	1.1402	.1763
1.405	3.3725	.3644	3	25	1.9595	.8802	4.6146	1.0791	.2177
2.454	5.3996	.3870	3	30	1.1633	.3983	1.5119	.6643	.0779
3.274	7.8567	.5801	3	20	.7053	.2004	.5375	.3256	.0263
13.374	26.7480	.5832	2	25	.5780	1.1448	1.6446	.8935	3.5054
15.617	34.3584	.2977	2	15	.9123	1.0405	1.9150	2.5998	3.3818
17.766	42.6403	.1361	1	10	1.1521	.8459	2.0428	4.7164	2.5423
19.563	35.2125	.1837	2	10	1.5610	.9138	3.2716	9.5331	3.2670
22.290	44.5792	.2163	2	5	1.6238	.9135	3.4711	11.7540	3.7201
24.804	54.5673	.2879	2	15	1.8555	.6830	3.9093	17.0790	2.3142
34.670	62.2975	.5765	2	5	1.0592	.4105	1.2904	7.7657	1.1666
44.883	22.9417	.2558	3	10	.8274	.4836	.9185	6.1457	2.0993
59.439	29.7203	.2607	3	10	.8038	.4824	.8787	7.6801	2.7660
64.197	32.0996	.2243	3	15	.6393	.4966	.6082	5.2483	2.5607
95.841	47.9226	.2547	3	10	.4282	.3730	.3225	3.5143	2.6677

Station 25, cont'd.

## NON-ROTATATED APPARENT RESISTIVITIES

PERIOD	BANDWIDTH	EXPRED EX	EV PRED EY	SKEWNESS	POINTS IN BW	QUALITY	APPARENT RI	APPARENT BY
-0.25	-0.604	-0.813	-0.915	-3583	355	1	-3607	-5545
-0.26	-0.562	-0.932	-0.975	-3274	381	2	-5296	1.1945
-0.26	-0.521	-0.899	-0.935	-3449	411	2	-6481	1.2421
-0.27	-0.479	-0.902	-0.910	-3663	497	1	-1.0488	1.7173
-0.38	-0.922	-0.808	-0.8458	-3225	232	1	2.9773	3.5C12
-0.41	-0.893	-0.8534	-0.8904	-3376	240	1	2.6724	3.6749
-0.43	-0.868	-0.8682	-0.9017	-3228	247	1	2.4748	2.7440
-0.47	-0.848	-0.8507	-0.9174	-3165	252	1	2.1C24	2.4777
-0.59	-1.107	-0.917	-0.9475	-3149	153	1	2.0120	2. C304
-0.64	-1.119	-0.9279	-0.9562	-3136	151	1	1.7260	1.7694
-0.72	-1.147	-0.9334	-0.9600	-3044	148	1	1.6280	1.6494
-0.83	-1.500	-0.9360	-0.9611	-2958	144	1	1.6355	1.7121
-0.89	-2.148	-0.9395	-0.9615	-2966	100	1	1.6155	1.64924
-1.02	-2.253	-0.9260	-0.9484	-2829	96	1	1.5343	1.5576
-1.21	-2.111	-0.9227	-0.9413	-2844	90	1	1.5853	1.6898
-1.37	-3.278	-0.9215	-0.9399	-2864	66	1	1.7196	1.8454
-1.47	-2.653	-0.9160	-0.9352	-2877	61	1	1.8080	2.0089
-1.63	-3.579	-0.9106	-0.9296	-2937	60	1	1.8605	2.2926
-2.01	-4.018	-0.8719	-0.8955	-2920	54	1	2.1679	2.6541
-2.08	-5.004	-0.8681	-0.8890	-2945	44	1	2.2884	2.9306
-2.56	-5.684	-0.8046	-0.8124	-2937	39	1	3.0359	4.2540
-2.61	-4.694	-0.7797	-0.8108	-3088	96	2	3.0754	4.5952
-3.18	-7.638	-0.6985	-0.7362	-3216	28	2	4.4672	7.3752
-3.35	-6.697	-0.6412	-0.6273	-2743	33	2	5.3876	6.6136
-4.10	-9.027	-0.403	-0.4896	-3331	24	3	16.0430	21.0720
-4.61	-8.305	-0.3720	-0.4652	-3551	27	3	23.7730	27.9530
-4.86	-1.1657	-0.3669	-0.4514	-3382	20	3	27.5110	32.4670
-5.58	-1.1161	-0.3243	-0.4410	-3334	20	3	31.8180	39.0090
-6.04	-1.4490	-0.1531	-0.4441	-4889	178	1	1.5116	3.1508
-6.13	-1.3491	-1.802	-1.609	-3707	191	3	2.7884	5.1752
-6.25	-1.2492	-2.450	-1.1719	-4109	206	4	4.0192	9.3245
-6.38	-1.1492	-3.9457	-2.2886	-3680	224	3	7.2206	17.6145
-6.52	-1.4137	-3.3337	-2.3550	-2757	16	3	31.5570	4.9.666
-7.41	-1.7793	-4.129	-3125	-3243	13	3	25.3490	5.4.7350
-8.16	-1.4693	-4.168	-3432	-2992	13	3	17.8620	45.5460
-9.22	-2.2117	-4.677	-5196	-4054	116	1	16.1440	28.0670
-9.30	-1.8602	-5181	-3294	-3353	12	3	14.4830	45.4570
-9.74	-2.1427	-5185	-44920	-4083	121	3	1.1440	15.1690
-1.035	-2.2770	-5458	-3772	-3204	11	3	11.1910	35.1350
-1.041	-2.0819	-5128	-5463	-3905	124	3	11.2160	16.7550
-1.130	-1.3333	-5393	-5656	-3513	127	3	12.2360	16.6910
-1.132	-2.7157	-5477	-4984	-2756	9	3	10.9460	12.4870
-1.497	-3.758	-5485	-5984	-3447	77	3	9.8402	12.4460
-1.494	-2.5996	-4974	-5891	-2957	9	3	12.3910	17.3820
-1.547	-3.4031	-5224	-6161	-3476	76	3	10.0900	12.2410
-1.550	-3.1004	-5068	-5837	-2974	8	3	12.5330	19.3210
-1.644	-3.6165	-4742	-6198	-3062	6	3	11.0500	13.4310
-1.727	-4.1451	-4655	-5973	-3395	6	3	10.9460	12.4870
-1.725	-3.4669	-4971	-5871	-3224	75	3	12.6120	18.1460
-1.699	-2.5974	-4555	-5737	-3366	72	3	11.2290	17.2550
-2.147	-5.1525	-4376	-5828	-3352	50	3	11.4520	16.4270
-2.457	-5.4548	-4217	-5558	-3605	48	3	11.5700	17.3540
-2.545	-4.9992	-2998	-5792	-3403	5	3	13.1340	12.1440
-2.584	-5.1674	-2998	-5392	-3403	5	3	12.2800	12.3220
-2.611	-5.7438	-2998	-5292	-3403	5	3	12.4200	12.4510
-2.636	-4.3267	-3015	-4800	-2812	4	3	12.6150	17.3930
-2.492	-5.7834	-3963	-4998	-4C17	45	3	12.6150	15.5320
-2.277	-7.6641	-4215	-4665	-5055	34	3	12.3400	15.3200
-1.574	-6.3646	-4026	-4449	-42C2	41	3	12.7050	15.7050

3.902	8.5844	.3795	.4401	.3984	31	3	15.2560	20.5130
4.147	9.1224	.2503	.3419	.3846	4	3	31.9350	18.5590
4.306	9.6125	.2503	.3419	.3846	4	3	33.1630	19.2730
4.521	8.1374	.2503	.3419	.3846	4	3	34.8160	20.2330
4.819	9.6386	.3393	.3427	.3056	28	3	10.2350	19.1050
5.002	12.0034	.3258	.3266	.2843	22	3	10.0530	17.9720
6.197	13.6340	.2874	.3168	.7826	20	3	9.2452	18.3410
6.256	11.2604	.3158	.3251	.5663	24	3	9.6893	19.2820
6.660	3.3298	.2456	.3433	.3973	6	3	50.7010	29.8340
7.634	18.3211	.3195	.3399	.5961	15	3	10.8040	19.7480
8.032	16.0645	.2554	.2950	.6276	17	3	12.4280	20.5000
9.843	21.6539	.3451	.2804	.7580	12	3	20.2420	21.9910
10.732	5.3662	.3707	.3846	.3940	3	3	56.8740	61.5800
11.068	19.9219	.6579	.5987	.7612	14	3	43.3660	13.5190
11.483	5.7415	.3707	.3846	.3940	3	3	60.8520	65.8870
11.651	27.9634	.6083	.4948	.9664	10	3	53.3980	16.3810
12.519	6.2594	.3707	.3846	.3940	3	3	66.3410	71.8300
13.387	26.7745	.8835	.8432	.7722	10	3	82.1160	13.3360
15.633	34.3914	.9290	.9374	.8316	9	3	109.8100	13.0290
17.784	42.6821	.9614	.9714	.7475	7	3	172.0300	12.8650
19.581	25.2473	.9423	.9419	.6252	8	3	147.0400	13.6470
22.312	44.6229	.9349	.9440	.6171	7	3	159.2700	13.3410
24.828	54.6209	.9379	.9469	.6601	6	3	174.2900	13.4960
27.144	65.1466	.9406	.9472	.6682	5	3	188.4900	14.4880
34.644	62.3597	.9607	.9533	.9544	5	3	79.9440	12.5080
37.186	74.3716	.9659	.9586	.9601	4	3	84.1410	13.2290
39.432	86.7528	.9702	.9617	.9467	3	3	82.3120	13.3720
41.430	99.4332	.9676	.9453	.9570	4	3	55.6230	8.7850
61.293	110.3290	.9844	.9536	.5434	3	3	63.3930	6.6377
69.167	49.5810	.9535	.9057	.4743	5	3	108.4100	11.6210
102.062	51.0308	.9535	.9057	.4743	5	3	111.5800	11.9610
104.665	52.3314	.9547	.9068	.3459	4	3	107.8800	11.0460
169.736	84.8680	.9450	.8960	.3167	3	3	182.7800	17.7080

Station 26, cont'd.

## ROTATED IMPEDANCE AND APPARENT RESISTIVITY DATA

PERIOD	BANDWIDTH	SKINNESS	QUALITY	ROTATE	ANG
.025	.0604	-3503	6.4090	ZY	RX
.026	.0562	-3274	7.0865	111.6800	RY
.026	.0521	-3449	8.0378	229.4600	-2568
.027	.0479	-3663	10.6330	241.9000	-3346
.027	.0472	-3225	15.2210	344.7200	-9233
.038	.0893	-3276	15.7210	14.9310	1.2332
.041	.0843	-2228	16.8180	12.3400	.6015
.043	.0848	-3165	17.4570	9.2684	1.8990
.047	.0849	-3149	16.6800	11.3960	1.7130
.059	.1407	-3149	15.6210	6.0078	2.2968
.064	.1419	-3176	13.5420	5.5962	1.2365
.072	.1447	-3044	12.6080	1.902800	2.6451
.083	.1500	-2958	220	11.8790	1.7617
.089	.2149	-2966	135	11.4230	2.3511
.102	.2253	-2629	235	10.0450	2.5049
.121	.2411	-2844	140	9.1746	2.6202
.137	.3278	-2864	135	8.7740	2.6459
.147	.2653	-2877	125	5.2532	2.6455
.163	.3579	-2937	125	8.6935	1.4530
.201	.4018	-2720	130	2.4033	2.2999
.208	.5004	-2245	130	8.0191	2.2955
.258	.5684	-2917	130	5.0191	2.2955
.261	.4694	-3084	220	5.0964	2.2955
.318	.7638	-3216	130	7.2271	2.2955
.335	.6697	-2743	125	7.5320	2.2955
.410	.9027	-3231	125	7.0169	2.2955
.461	.8305	-3351	125	5.9329	2.2955
.486	.11657	-3262	125	7.2430	2.2955
.558	.11161	-3324	130	6.3738	2.2955
.604	.14490	-4889	195	6.9687	2.2955
.613	.12491	-3707	190	5.5540	2.2955
.625	.12492	-4109	190	1.3447	2.2955
.628	.1492	-3680	185	2.8481	2.2955
.652	.14337	-2757	140	6.3013	2.2955
.741	.17793	-3247	150	5.7157	2.2955
.816	.14693	-2992	225	4.4466	2.2955
.922	.22117	-4054	190	4.1457	2.2955
.930	.18602	-3352	140	4.1141	2.2955
.974	.21427	-4087	230	5.6797	2.2955
1.025	.22770	-3204	130	4.2466	2.2955
1.041	.20619	-3905	150	5.7095	2.2955
1.30	.20313	-3513	155	2.6072	2.2955
1.32	.2117	-2703	195	3.7109	2.2955
1.407	.3758	-3447	155	2.4297	2.2955
1.444	.25996	-2957	265	4.0026	2.2955
1.547	.34021	-3476	160	4.9131	2.2955
1.550	.31004	-2974	160	2.6468	2.2955
1.644	.20313	-3513	165	2.4150	2.2955
1.727	.41451	-3758	155	1.6755	2.2955
1.735	.34699	-3228	165	2.2230	2.2955
1.999	.35974	-3366	155	1.5014	2.2955
2.447	.31004	-2974	155	1.3747	2.2955
2.457	.31644	-3605	240	1.9025	2.2955
2.555	.3403	-3403	255	2.7459	2.2955
2.611	.3403	-3403	165	1.0554	2.2955
2.626	.3403	-3403	165	1.0554	2.2955
2.892	.57824	-4017	170	1.2454	2.2955
2.947	.54048	-3605	155	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955
2.947	.54048	-3605	145	1.3747	2.2955
2.955	.59942	-3403	240	1.0713	2.2955
2.984	.5674	-3403	255	1.0556	2.2955
2.611	.57478	-3403	165	1.0554	2.2955
2.626	.3267	-2612	170	1.2454	2.2955
2.892	.57824	-4017	150	1.9261	2.2955

3.902	8.5844	.3984	3	230	2.9597	.7387	9.3058	6.8363	-254
4.147	9.1224	.3846	3	160	1.2571	1.6426	4.2785	1.3105	2.2277
4.306	8.6125	.3846	3	160	1.2571	1.6426	4.2785	1.3609	2.3237
4.521	8.1374	.3846	3	250	1.6426	1.2571	4.2785	2.4395	1.4288
4.819	9.6186	.3056	3	135	.3959	2.3035	5.4627	.1511	5.1142
5.002	12.0034	.2843	3	130	.4803	2.0458	4.4159	.2308	4.1564
6.256	11.2609	.5663	3	140	.2367	1.8307	3.4074	.0701	4.1931
6.660	3.3298	.3973	3	155	1.1752	1.6816	4.2087	1.8394	3.7462
7.634	18.3211	.5961	3	140	.1571	1.8684	3.5909	.0377	5.4447
10.732	5.3662	.3940	3	140	1.0252	3.0184	10.1620	2.2561	19.5570
11.483	5.7415	.3940	3	140	1.0252	3.0184	10.1620	2.4139	20.9240
12.519	6.2594	.3940	3	230	3.0184	1.0252	10.1620	22.8120	2.6317
61.293	110.3290	.5434	3	180	1.9687	.7271	4.4045	47.5130	6.4806
99.167	49.5810	.4743	3	100	.6533	1.7825	3.6040	8.4637	63.0140
102.062	51.0308	.4743	3	190	1.7825	.6533	3.6040	64.2550	8.7110
104.665	52.3314	.3459	3	105	.5628	1.7759	3.4707	6.6311	66.0200
169.736	84.8680	.3167	3	195	1.7625	.5540	3.4133	105.4600	10.4180

Station 26, cont'd.

APPENDIX II

MAGNETOTELLURIC APPARENT RESISTIVITY CURVES

