


REFERENCE K 3553W



2 COMPLETION RECORD

AGNEW & SWEET
 24 HOUR PHONE BUS 327-0267
 3914 GILMORE AVENUE
 BAKERSFIELD, CALIFORNIA
 93308




SIDINGSPAL SURVEY

CUSTOMER: CHEVRON RESOURCES COMPANY WELL: SODA LAKE
 DATE: 11:33 MARCH 8, 1979
 WIRELINE SERVICE: 16 1/2" PLUGGED @ 2000'
 STATIC OPEN HOLE
 1988
 127-691
 STATIC TEMPERATURE TRAVERSE SURVEY
 CORRECTED COPY, TRAVERSE CORRECTED PER MINUTE TO 1988'

23-2011-28E
 1121-1161

BY: NAIL & CONNELL

DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP
20	127.0	520	343.3	1020	345.6	1520	347.3
40	127.7	540	343.3	1040	345.4	1540	347.3
60	129.0	560	343.3	1060	345.3	1560	347.3
80	126.1	580	343.2	1080	347.1	1580	347.3
100	126.9	600	343.2	1100	347.2	1600	347.3
120	205.4	620	343.3	1120	348.3	1620	347.3
140	216.3	640	343.5	1140	348.4	1640	347.3
160	230.2	660	343.5	1160	348.5	1660	347.3
180	231.1	680	343.5	1180	350.3	1680	347.3
200	231.5	700	343.5	1200	351.7	1700	347.3
220	262.5	720	343.6	1220	351.7	1720	347.3
240	271.1	740	343.6	1240	351.7	1740	347.3
260	285.4	760	343.7	1260	351.7	1760	347.3
280	287.7	780	343.7	1280	351.7	1780	347.3
300	287.7	800	343.7	1300	351.7	1800	347.3
320	287.7	820	343.7	1320	351.7	1820	347.3
340	287.7	840	343.7	1340	351.7	1840	347.3
360	287.7	860	343.7	1360	351.7	1860	347.3
380	287.7	880	343.7	1380	351.7	1880	347.3
400	287.7	900	343.7	1400	351.7	1900	347.3
420	287.7	920	343.7	1420	351.7	1920	347.3
440	287.7	940	343.7	1440	351.7	1940	347.3
460	287.7	960	343.7	1460	351.7	1960	347.3
480	287.7	980	343.7	1480	351.7	1980	347.3
500	287.7	1000	343.7	1500	351.7	2000	347.3

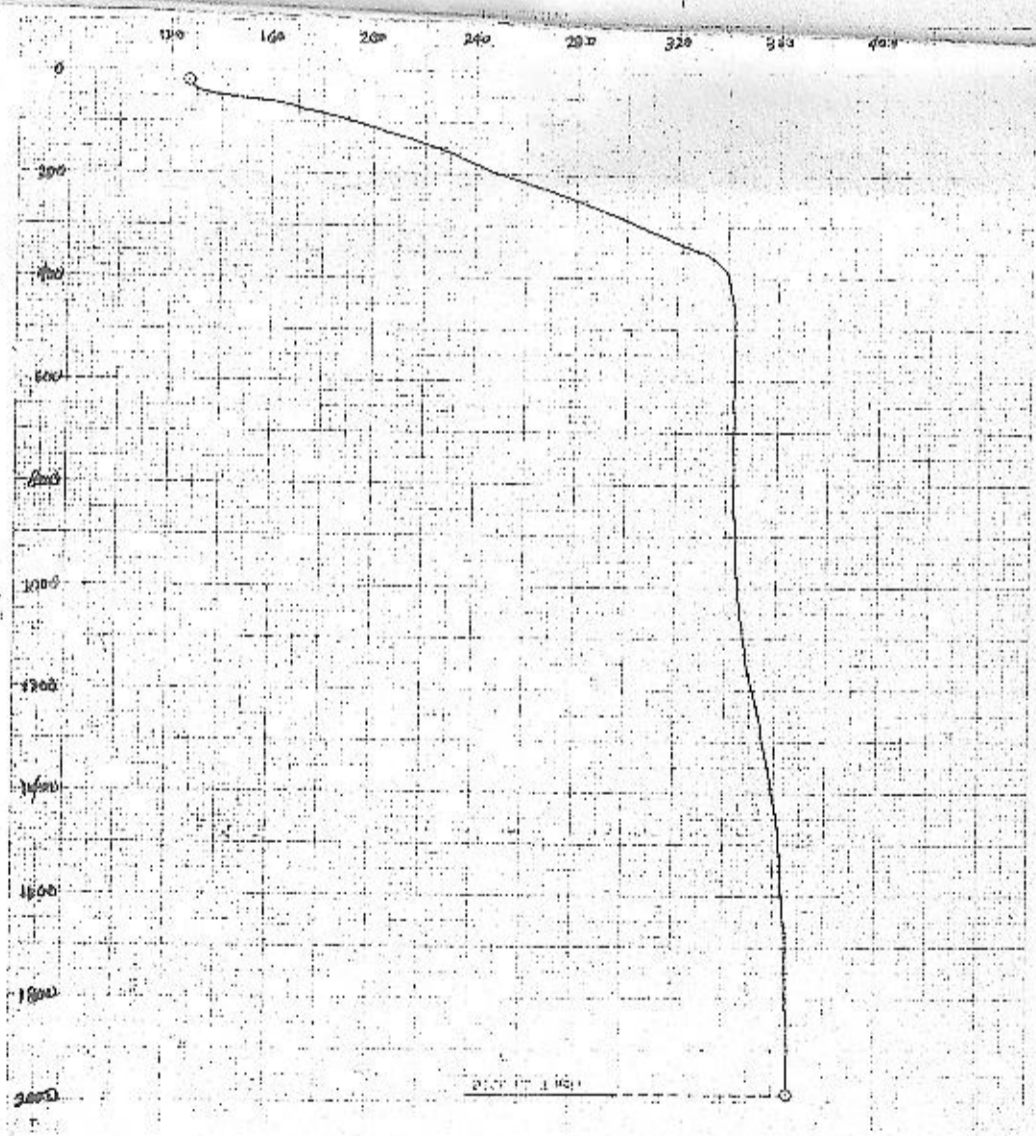

DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP
20	127.0	520	343.3	1020	345.6	1520	347.3
40	127.7	540	343.3	1040	345.4	1540	347.3
60	129.0	560	343.3	1060	345.3	1560	347.3
80	126.1	580	343.2	1080	347.1	1580	347.3
100	126.9	600	343.2	1100	347.2	1600	347.3
120	205.4	620	343.3	1120	348.3	1620	347.3
140	216.3	640	343.5	1140	348.4	1640	347.3
160	230.2	660	343.5	1160	348.5	1660	347.3
180	231.1	680	343.5	1180	350.3	1680	347.3
200	231.5	700	343.5	1200	351.7	1700	347.3
220	262.5	720	343.6	1220	351.7	1720	347.3
240	271.1	740	343.6	1240	351.7	1740	347.3
260	285.4	760	343.7	1260	351.7	1760	347.3
280	287.7	780	343.7	1280	351.7	1780	347.3
300	287.7	800	343.7	1300	351.7	1800	347.3
320	287.7	820	343.7	1320	351.7	1820	347.3
340	287.7	840	343.7	1340	351.7	1840	347.3
360	287.7	860	343.7	1360	351.7	1860	347.3
380	287.7	880	343.7	1380	351.7	1880	347.3
400	287.7	900	343.7	1400	351.7	1900	347.3
420	287.7	920	343.7	1420	351.7	1920	347.3
440	287.7	940	343.7	1440	351.7	1940	347.3
460	287.7	960	343.7	1460	351.7	1960	347.3
480	287.7	980	343.7	1480	351.7	1980	347.3
500	287.7	1000	343.7	1500	351.7	2000	347.3