GL 04475_6

Reproduced By

Petroleum Information.

CORPORATION

Midland, Texas 79701

MADE FROM BEST COPY AVAILABLE

REFERENCE K 92868

COMPLETION RECORD

RETURN TO DENVER

PRUETT WIRELINE SERVICE

8915 ROSEDALE HWY BAKERSFIELD CA 93308
(805) 589-2768

Pruett

SUB—SURFACE TEMPERATURE SURVEY

J. Reed

COMPANY Getty oil FIELD Eolado WELL NAME 44 X 10

TOTAL DEPTH 7056'
CASING 13 3/8" @ 1213'
LINER none
PERFORATIONS none
MPP none
TUBING DETAIL none

WELL STATUS Static
CASING PRESSURE ---
TUBING PRESSURE ---
ZONE ---
MAX °F 231.71°

BOMB HUNG @ none
TIME ON BOTTOM 5:51pm 4-26
TIME OFF BOTTOM 6:51pm 4-26
SHUT IN 8:30pm 4-25
ON PRODUCTION ---
PURPOSE Traverse Temperature Survey

DATE April 26, 1981
ELEMENT RANGE 109-581°
ZERO POINT rig floor
ELEVATION ---
PICKUP 7029'

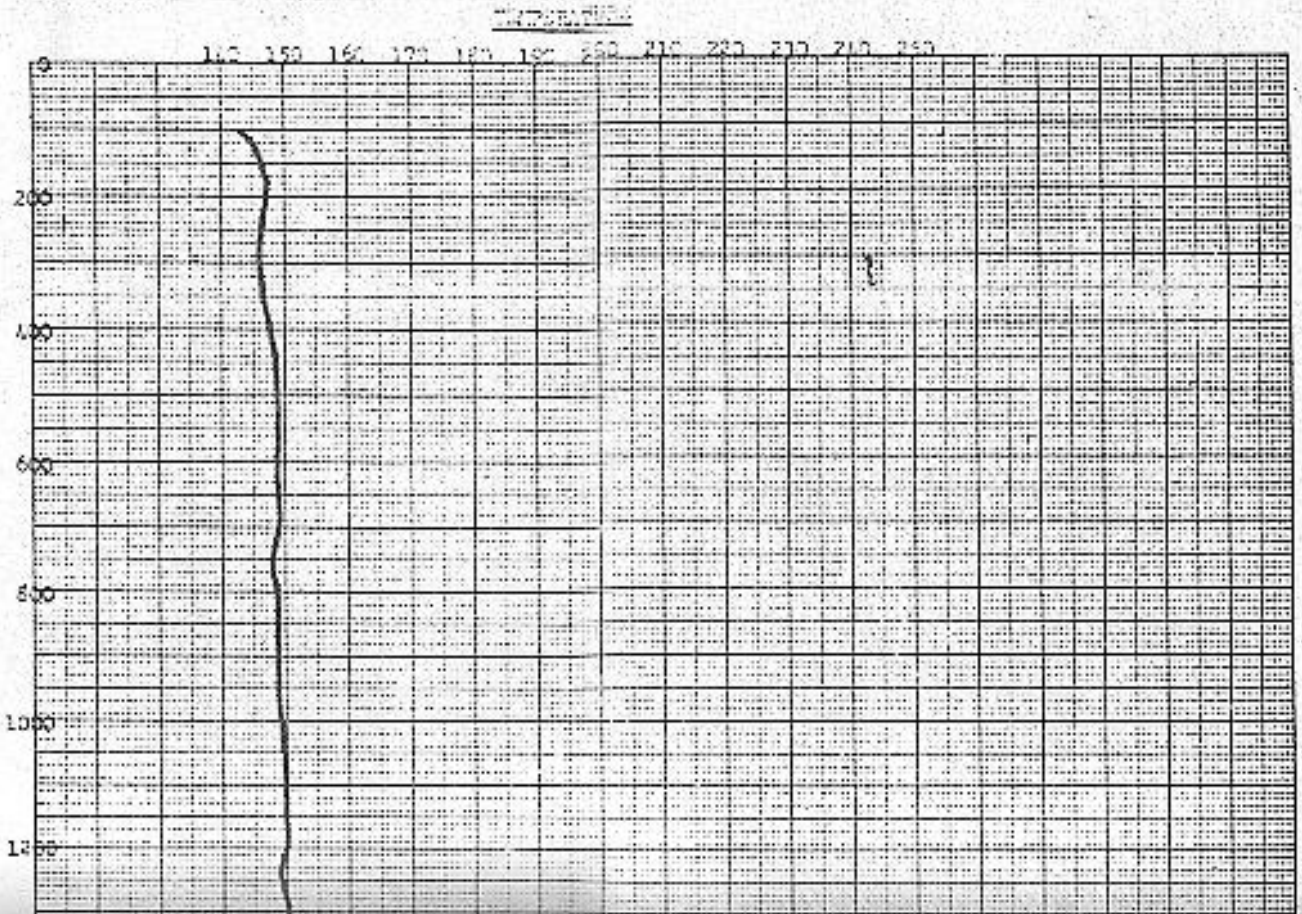

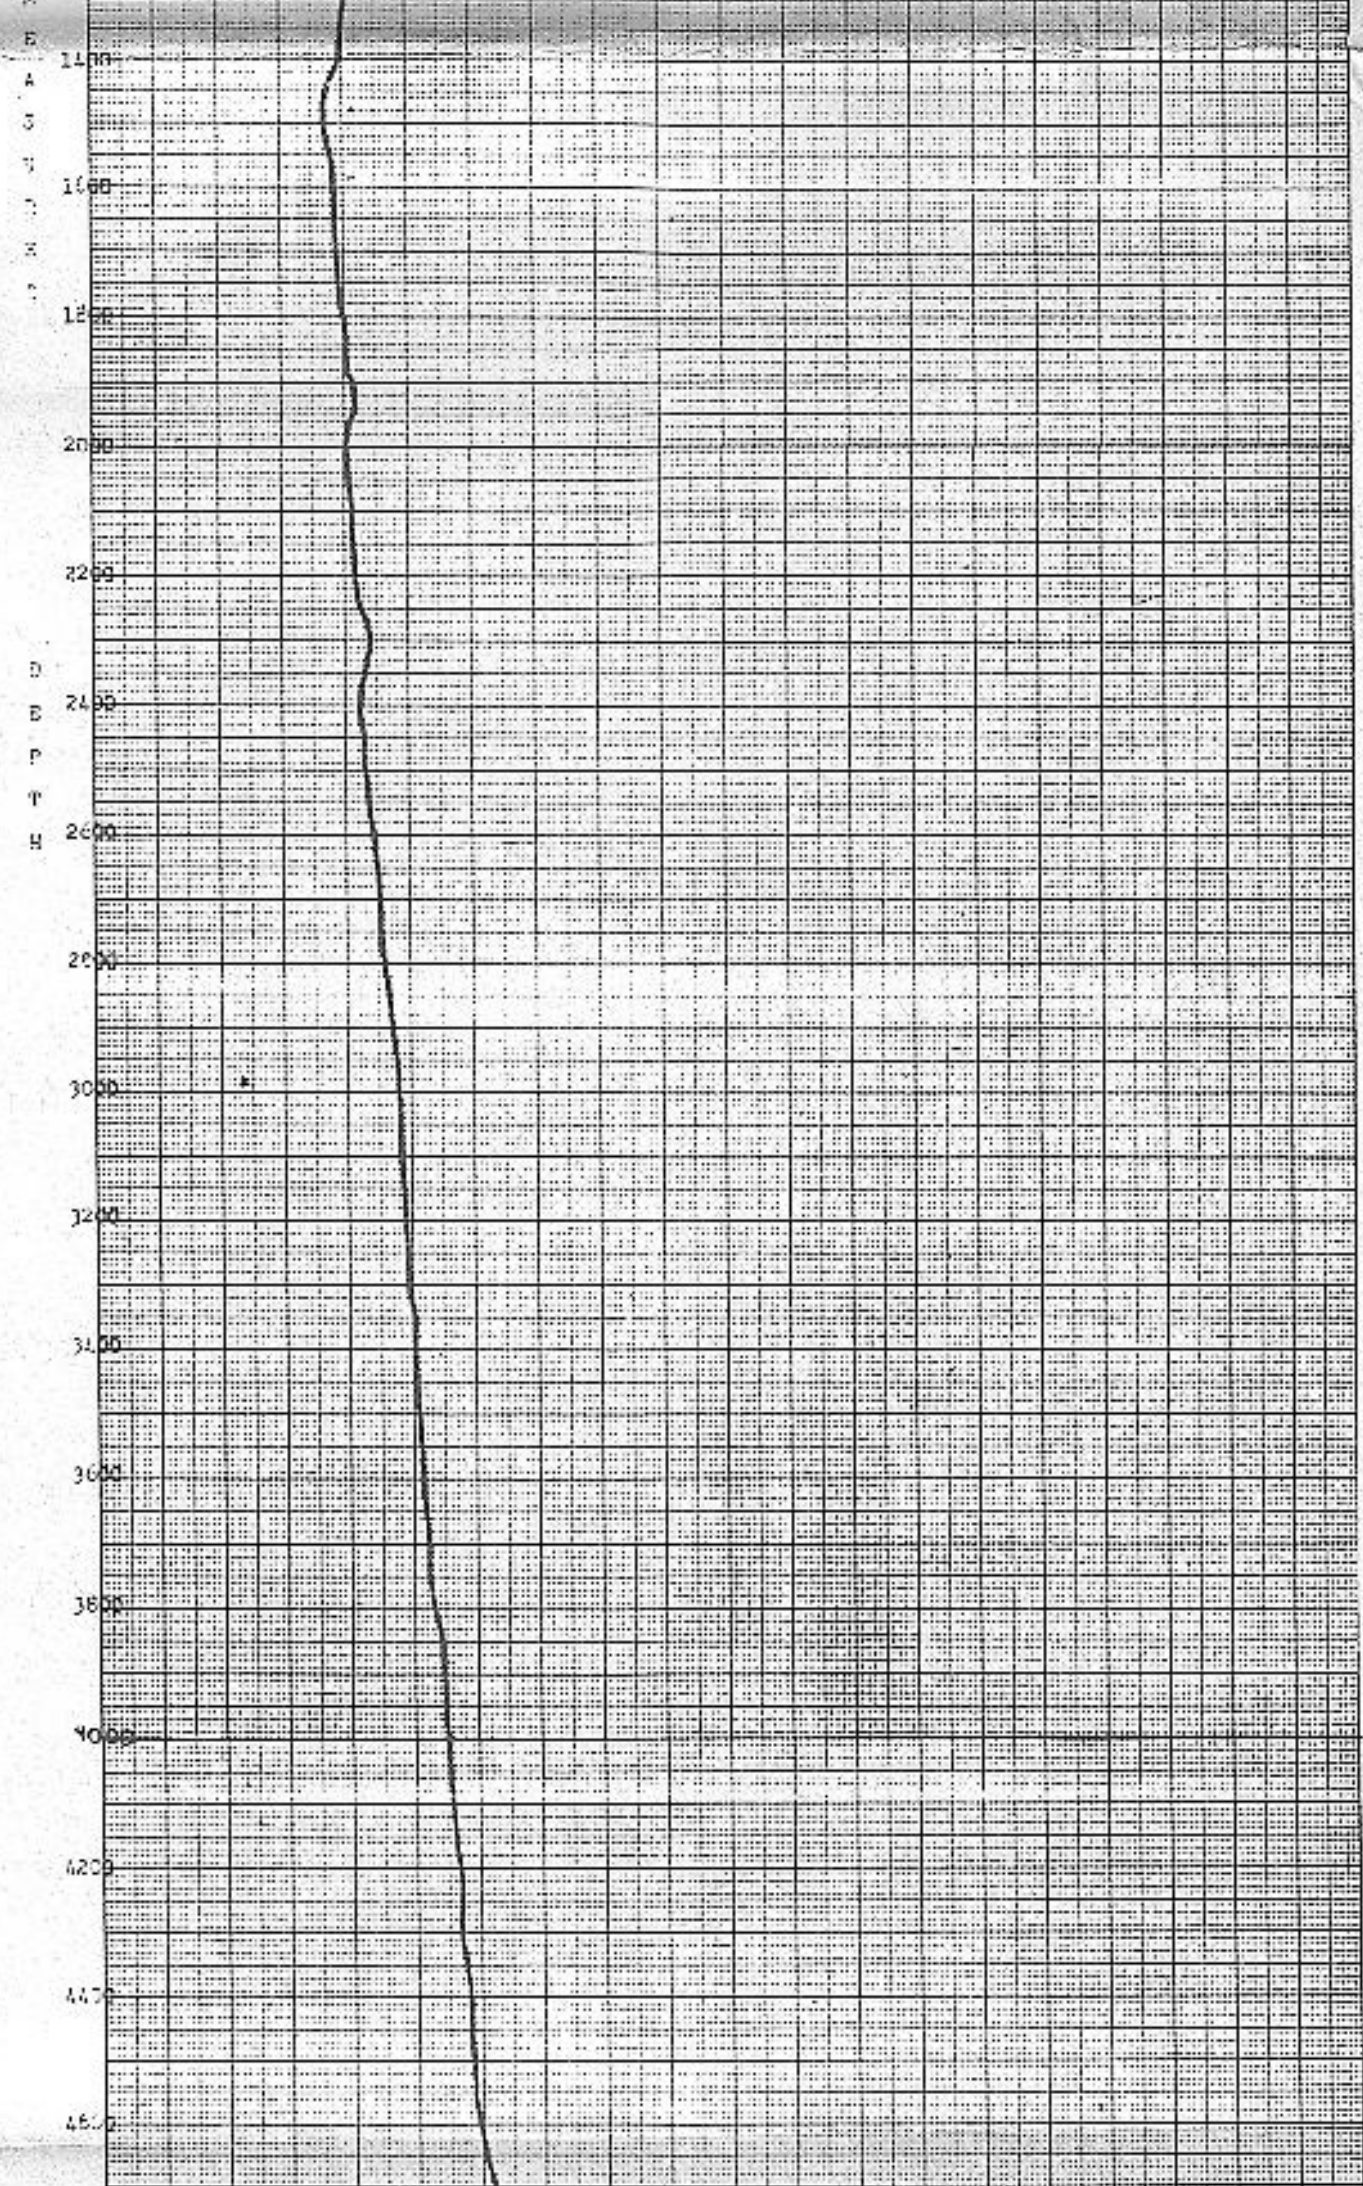

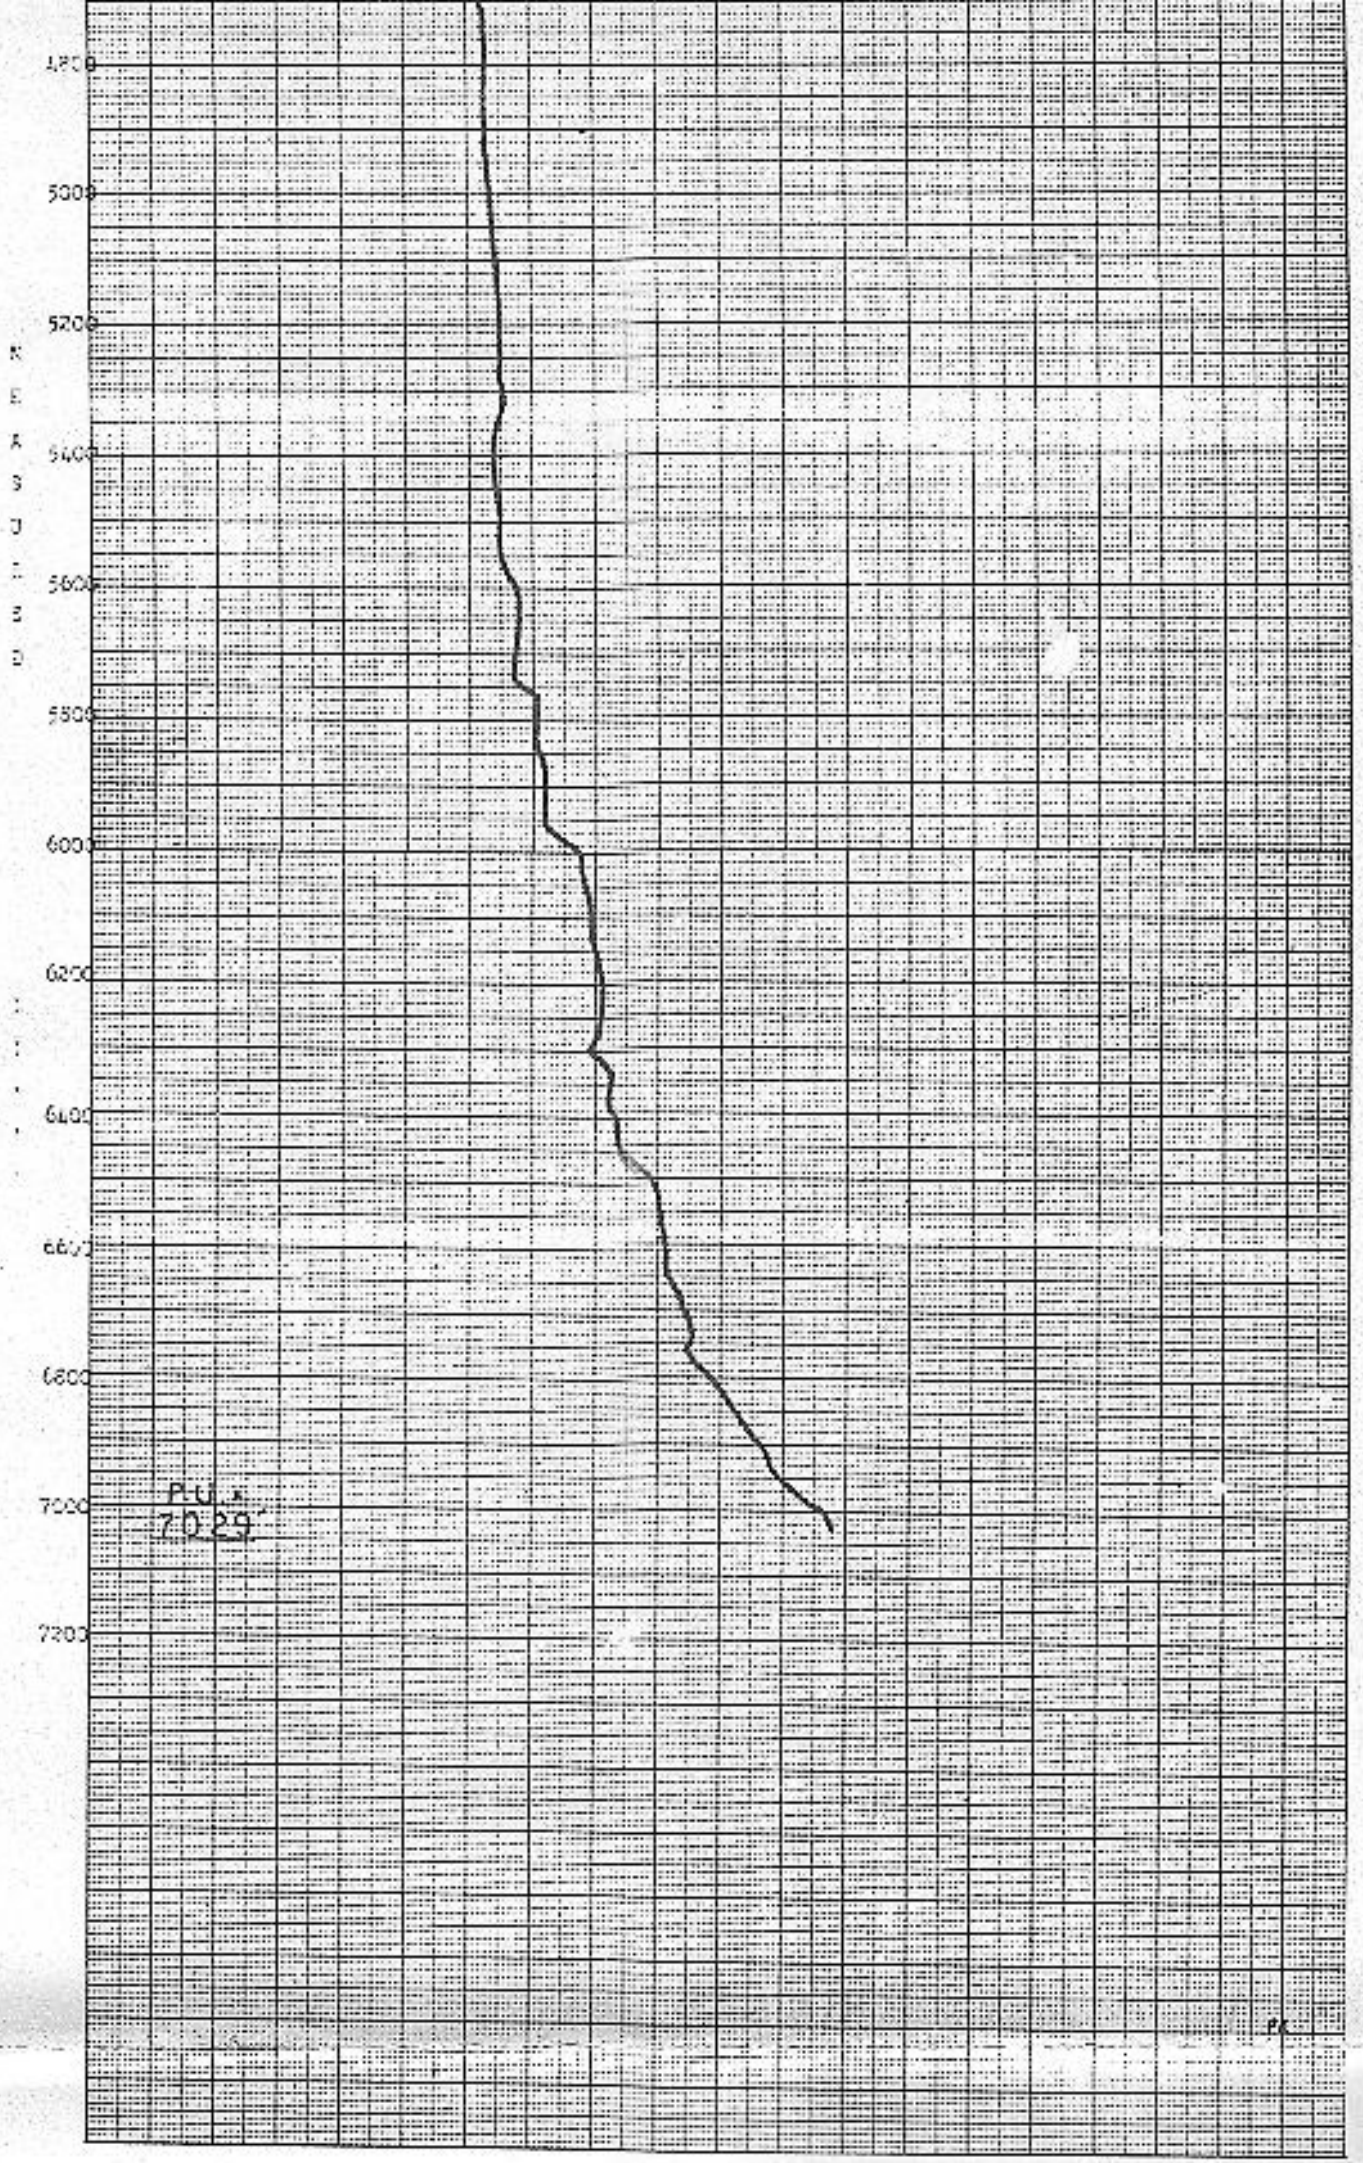

SURVEY DATA

DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.
100	145.06	1260	149.78	2420	152.51	3580	161.54	4740	172.88	5900	181.70
120	145.52	1280	150.20	2440	153.14	3600	161.54	4760	172.88	5920	181.70
140	146.63	1300	150.62	2460	153.14	3620	161.75	4780	172.88	5940	181.91
160	147.47	1320	150.41	2480	153.14	3640	161.96	4800	172.88	5960	181.91
180	147.89	1340	150.20	2500	153.35	3660	162.17	4820	172.67	5980	185.47
200	147.26	1360	149.99	2520	153.35	3680	162.38	4840	172.88	6000	188.00
220	147.05	1380	149.78	2540	153.56	3700	162.59	4860	172.88	6020	188.21
240	146.63	1400	149.57	2560	153.98	3720	162.59	4880	172.88	6040	188.21
260	146.42	1420	148.73	2580	154.19	3740	162.59	4900	172.88	6060	189.26
280	146.42	1440	147.68	2600	154.82	3760	162.59	4920	173.09	6080	189.68
300	146.42	1460	147.05	2620	155.03	3780	163.01	4940	173.09	6100	189.68
320	146.63	1480	147.26	2640	155.24	3800	163.22	4960	173.30	6120	189.68
340	146.84	1500	147.47	2660	155.24	3820	163.43	4980	173.51	6140	190.10
360	147.26	1520	147.68	2680	155.45	3840	164.27	5000	173.72	6160	190.52
380	147.68	1540	148.10	2700	155.45	3860	164.69	5020	173.93	6180	190.94
400	147.89	1560	148.52	2720	155.66	3880	164.69	5040	174.14	6200	191.36
420	148.31	1580	148.73	2740	155.66	3900	164.90	5060	174.14	6220	191.15
440	148.73	1600	148.94	2760	155.87	3920	164.90	5080	174.35	6240	191.15
460	148.94	1620	148.94	2780	155.87	3940	164.90	5100	174.56	6260	190.73
480	149.15	1640	148.94	2800	156.08	3960	164.90	5120	174.56	6280	190.31
500	148.94	1660	148.94	2820	156.50	3980	165.11	5140	174.77	6300	189.05
520	148.94	1680	149.15	2840	156.92	4000	165.32	5160	174.98	6320	191.78
540	148.94	1700	149.15	2860	157.13	4020	165.32	5180	174.98	6340	193.04
560	148.94	1720	149.36	2880	157.34	4040	165.32	5200	174.98	6360	192.20
580	148.94	1740	149.57	2900	157.34	4060	165.53	5220	175.19	6380	192.20
600	148.94	1760	149.78	2920	157.55	4080	165.74	5240	175.61	6400	193.67
620	148.94	1780	149.99	2940	157.76	4100	165.74	5260	175.19	6420	193.67
640	148.94	1800	150.20	2960	157.97	4120	165.95	5280	175.19	6440	193.88
660	148.94	1820	150.20	2980	158.18	4140	166.37	5300	175.61	6460	194.30
680	148.94	1840	150.20	3000	158.18	4160	166.58	5320	175.61	6480	196.82
700	148.94	1860	150.41	3020	158.18	4180	166.79	5340	174.77	6500	199.13
720	148.94	1880	150.41	3040	158.18	4200	167.00	5360	174.35	6520	199.97
740	147.89	1900	151.67	3060	158.18	4220	167.21	5380	174.35	6540	200.39
760	147.89	1920	152.09	3080	158.60	4240	167.00	5400	173.93	6560	200.60
780	148.32	1940	152.09	3100	158.81	4260	167.00	5420	173.72	6580	201.02
800	148.94	1960	151.04	3120	158.81	4280	167.21	5440	173.93	6600	201.44
820	148.94	1980	150.20	3140	159.02	4300	167.42	5460	174.56	6620	201.23
840	148.94	2000	150.41	3160	159.02	4320	167.63	5480	175.19	6640	201.23
860	148.94	2020	150.62	3180	159.23	4340	167.84	5500	174.77	6660	202.28
880	148.94	2040	150.83	3200	159.23	4360	168.05	5520	174.98	6680	203.75
900	149.15	2060	150.83	3220	159.44	4380	168.26	5540	174.98	6700	204.59
920	149.15	2080	151.25	3240	159.44	4400	168.47	5560	175.40	6720	205.43
940	149.36	2100	151.67	3260	159.65	4420	168.68	5580	176.66	6740	205.64
960	149.36	2120	151.25	3280	159.65	4440	[illegible]	5600	177.71	6760	204.59
980	149.57	2140	151.25	3300	159.86	4460	[illegible]	5620	177.71	6780	206.27
1000	149.57	2160	151.88	3320	159.26	4480	168.79	5640	177.71	6800	209.00
1020	149.78	2180	152.09	3340	160.27	4500	168.89	5660	178.13	6820	210.47
1040	149.78	2200	152.09	3360	160.28	4520	169.10	5680	177.50	6840	211.73
1060	149.99	2220	152.09	3380	160.28	4540	169.31	5700	177.29	6860	213.41
1080	150.20	2240	152.72	3400	160.49	4560	169.31	5720	177.29	6880	215.09
1100	150.41	2260	[illegible]	3420	160.70	4580	169.31	5740	177.29	6900	216.77
1120	150.41	2280	153.98	3440	160.71	4600	169.52	5760	180.86	6920	217.61
1140	150.41	2300	154.17	3460	160.70	4620	169.94	5780	180.65	6940	218.45
1160	150.41	2320	154.19	3480	160.91	4640	170.36	5800	180.23	6960	220.97
1180	150.41	2340	153.35	3500	161.12	4660	170.78	5820	180.23	6980	223.70
1200	150.41	2360	152.93	3520	161.12	4680	171.41	5840	180.44	7000	226.85
1220	149.36	2380	152.51	3540	161.33	4700	172.04	5860	182.12	7029	227.90
1240	149.15	2400	152.51	3560	161.33	4720	172.88	5880	182.12		

Temp after 1
Hr. Hang
231.71

C Skenfield

Survey traversed 20' per minute.

RETURN TO DENVER

2'

4/17/81

PRUETT WIRELINE SERVICE

8915 ROSEDALE HWY., BAKERSFIELD, CA 93308
(805) 589-2768

Pruett

SUB—SURFACE TEMPERATURE SURVEY

COMPANY Getty **FIELD** Love Lock **WELL NAME** Colado 14X-10

TOTAL DEPTH ---
CASING 13 3/8" @ 1213'
LINER ---
PERFORATIONS ---
MPP ---
TUBING DETAIL 12 [illegible] 5977' Open Hole 24" open to bottom

WELL STATUS Static
CASING PRESSURE ---
TUBING PRESSURE ---
ZONE ---
MAX °F 208.79°

BOMB HUNG @ none
TIME ON BOTTOM [illegible]
TIME OFF BOTTOM 2:41pm
SHUT IN ---
ON PRODUCTION ---
PURPOSE Traverse Temperature Survey

DATE April 17, 1981
ELEMENT RANGE 109-581°
ZERO POINT Derrick Floor
ELEVATION ---
PICKUP 6120'

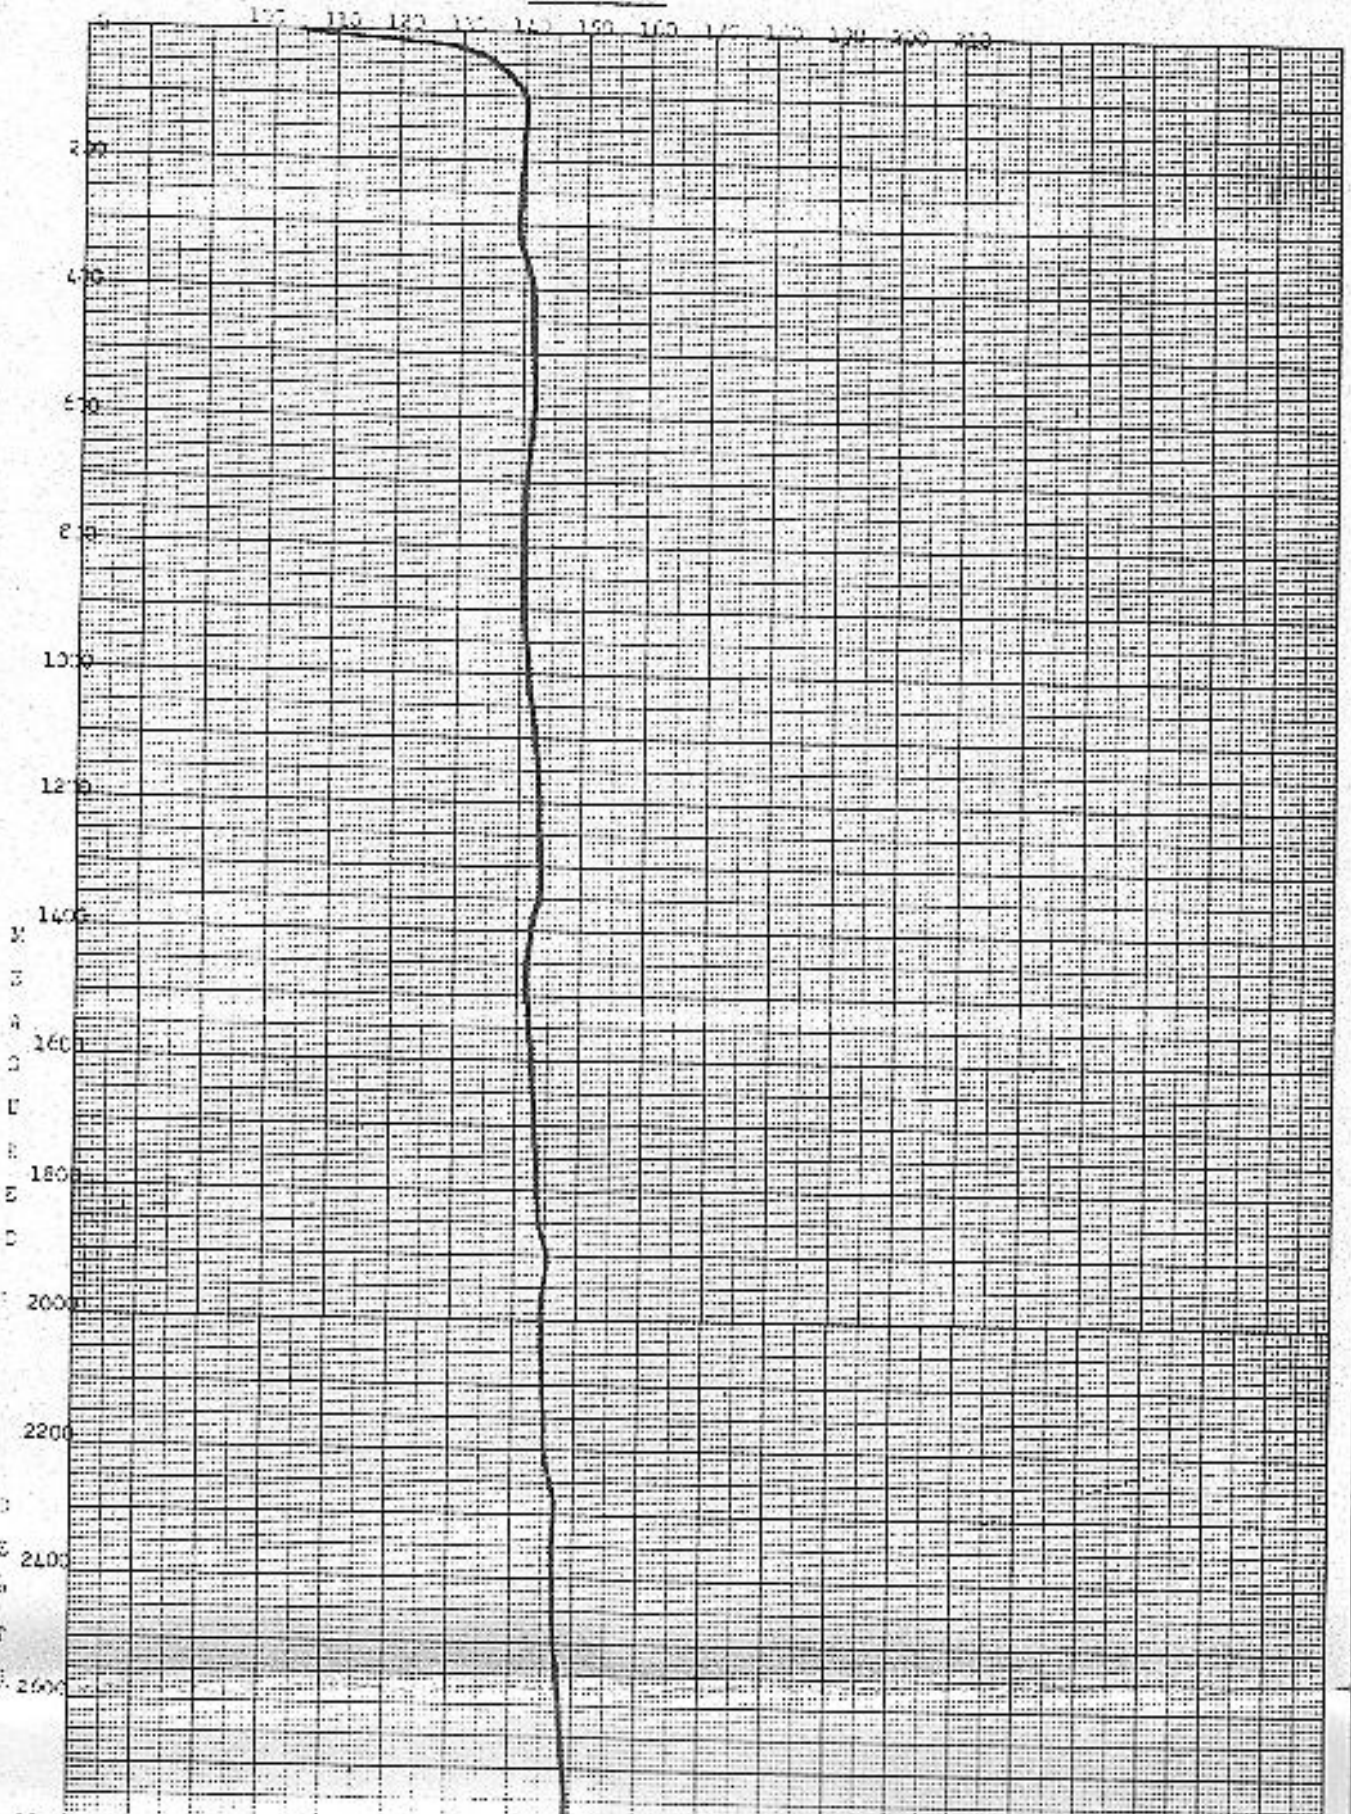

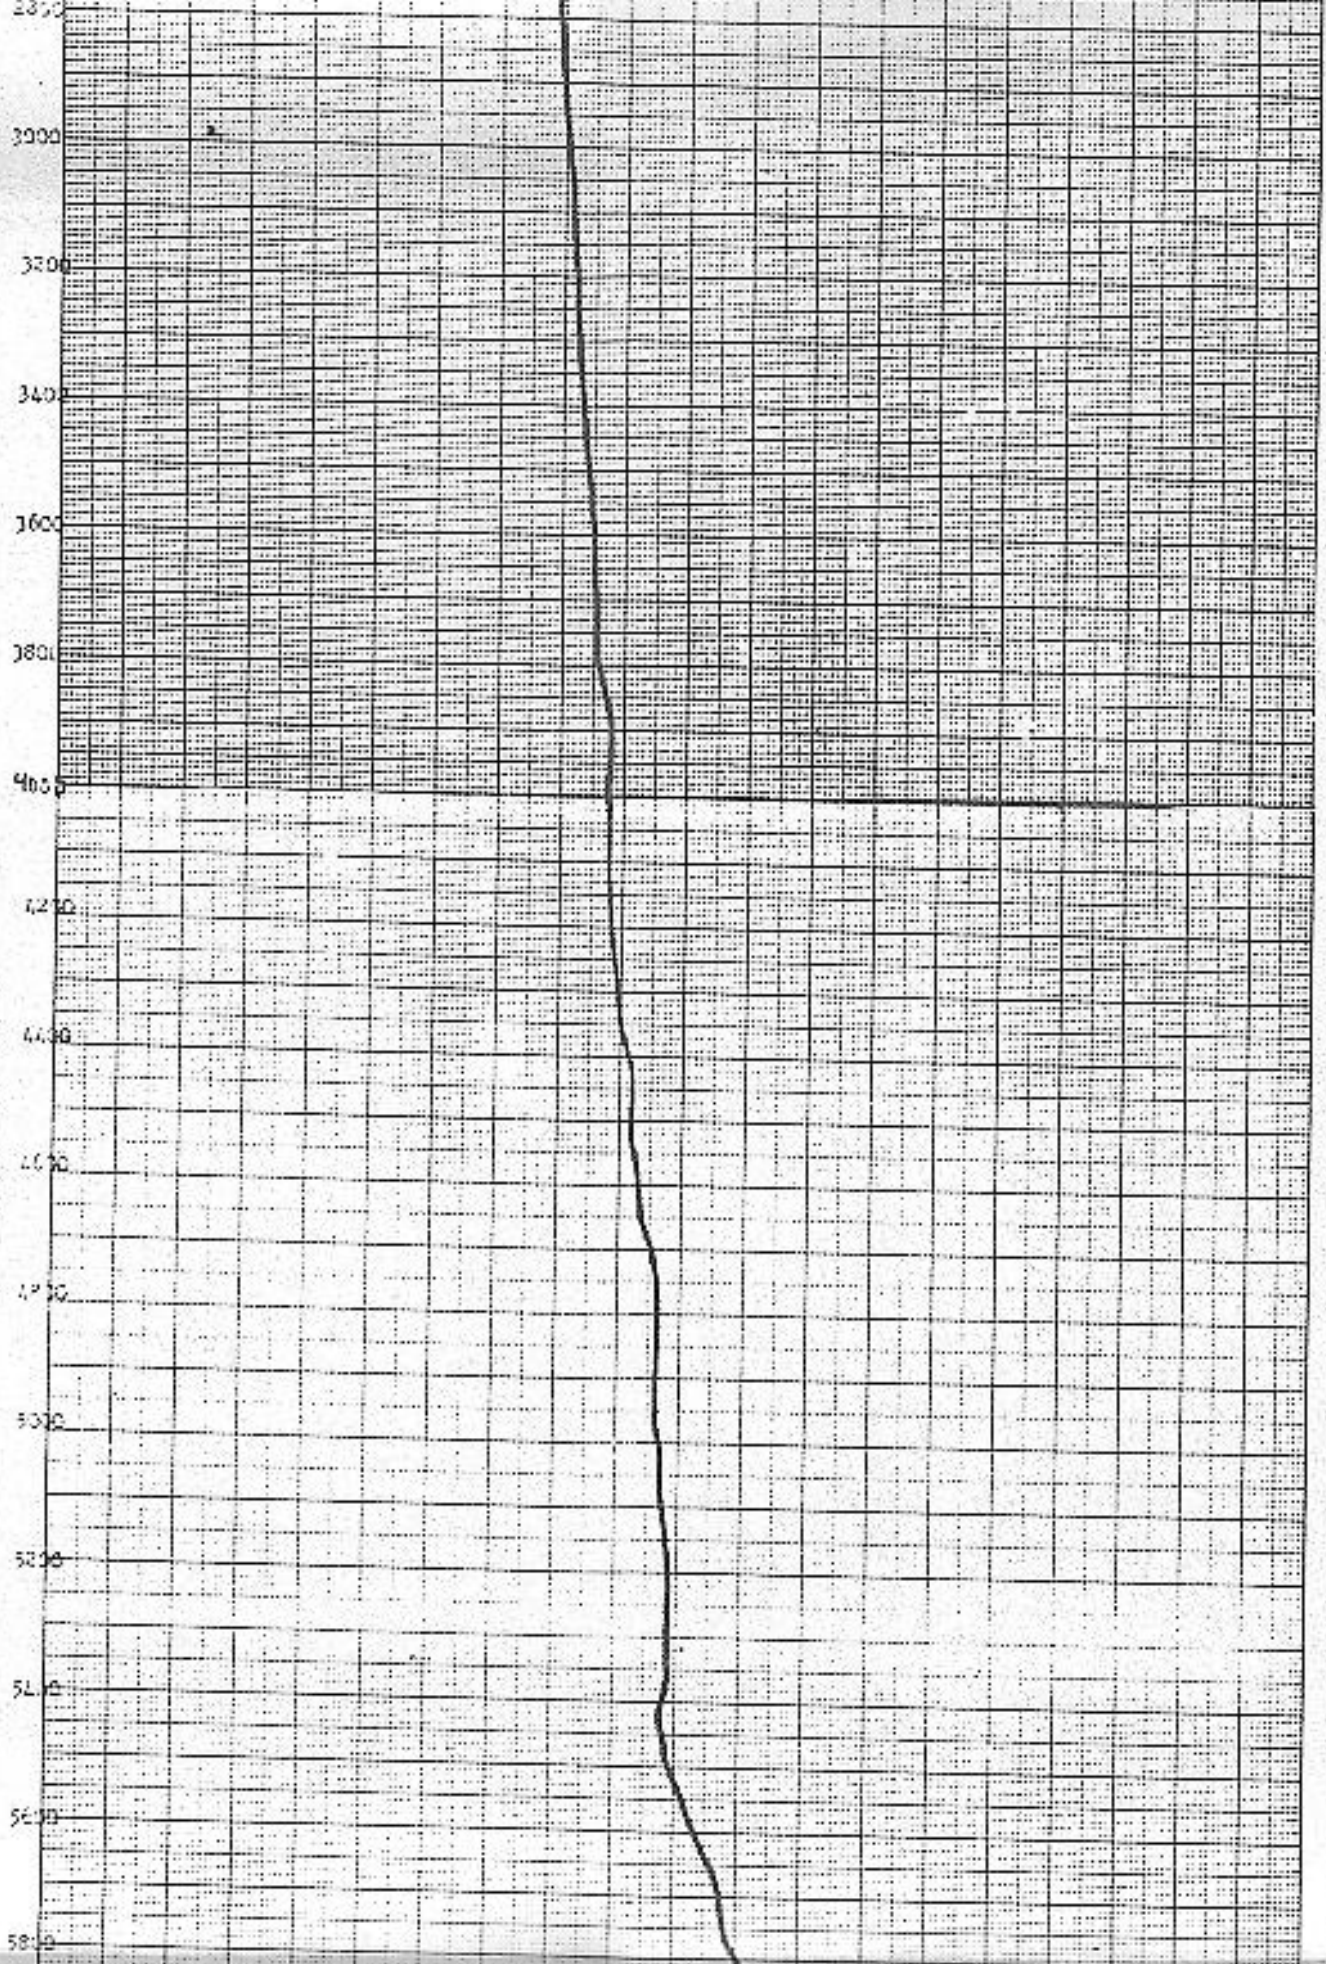

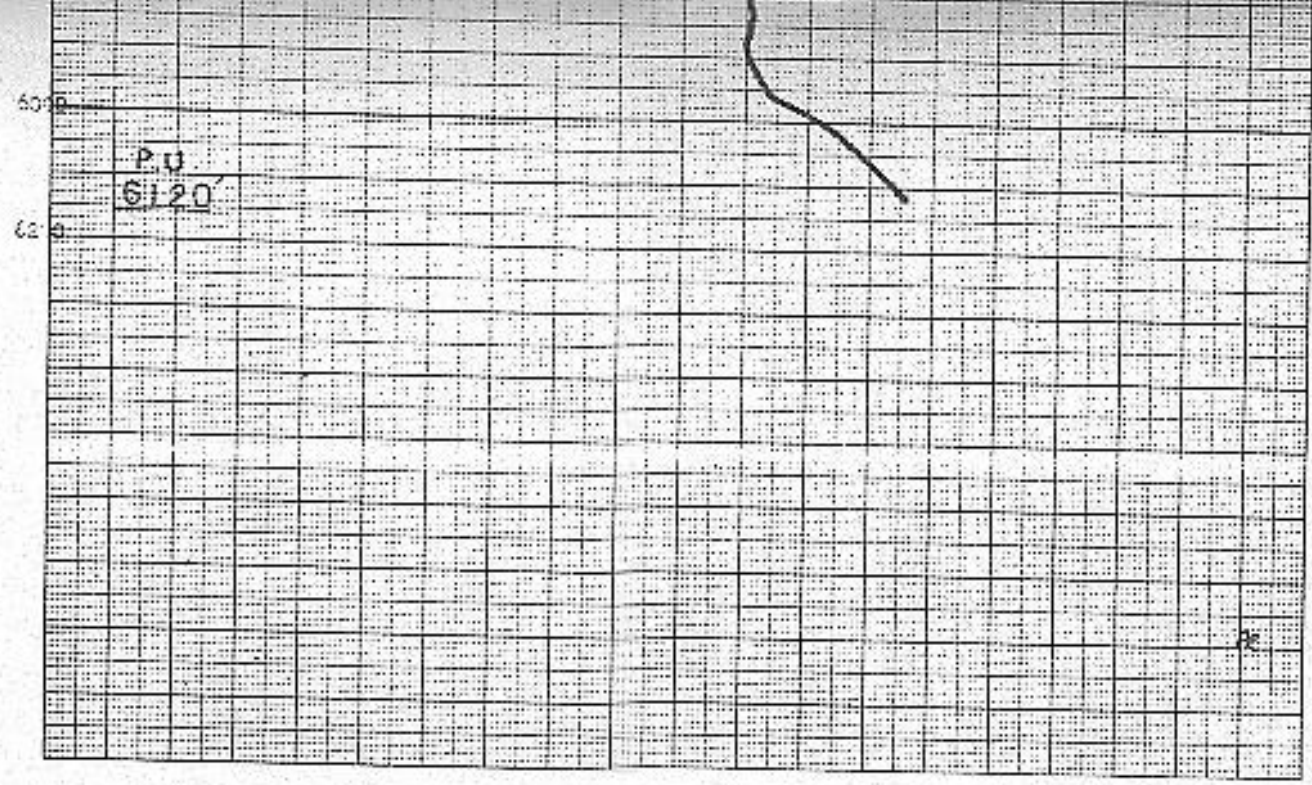

SURVEY DATA

DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.	DEPTH	TEMP.
0	132.3	1020	141.59	2040	[illegible]	3080	151.79	4100	157.97	5120	168.05
20	132.57	1040	142.01	2060	145.16	3100	151.48	4120	157.97	5140	168.26
40	134.84	1060	[illegible]	2080	145.37	3120	151.60	4140	[illegible]	5160	168.47
60	136.97	1080	142.64	2100	145.37	3140	151.27	4160	158.12	5180	168.68
80	139.07	1100	143.06	2120	145.37	3160	151.58	4180	158.39	5200	168.89
100	139.91	1120	143.30	2140	145.37	3180	[illegible]	4200	158.60	5220	168.89
120	140.33	1140	143.27	2160	145.58	3200	152.30	4220	158.81	5240	168.89
140	140.33	1160	143.27	2180	145.58	3220	152.30	4240	159.23	5260	168.89
160	140.33	1180	[illegible]	2200	[illegible]	3240	152.30	4260	159.44	5280	169.10
180	140.12	1200	[illegible]	2220	145.79	3260	152.30	4280	159.65	5300	169.10
200	139.70	1220	[illegible]	2240	146.12	3280	152.51	4300	159.86	5320	169.10
220	139.49	1240	[illegible]	2260	146.21	3300	152.51	4320	159.86	5340	169.10
240	139.28	1260	[illegible]	2280	147.26	3320	152.72	4340	160.07	5360	169.10
260	139.07	1280	[illegible]	2300	147.26	3340	152.72	4360	160.28	5380	168.68
280	139.07	1300	[illegible]	2320	147.05	3360	152.93	4380	161.12	5400	167.84
300	139.07	1320	[illegible]	2340	147.05	3380	153.14	4400	161.54	5420	167.63
320	139.28	1340	[illegible]	2360	146.84	3400	153.56	4420	161.75	5440	167.84
340	139.91	1360	[illegible]	2380	146.84	3420	153.56	4440	161.75	5460	168.47
360	[illegible]	1380	[illegible]	2400	[illegible]	3440	153.77	4460	[illegible]	5480	[illegible]
380	[illegible]	1400	[illegible]	2420	[illegible]	3460	[illegible]	4480	[illegible]	5500	169.10
400	141.59	1420	[illegible]	2440	[illegible]	3480	[illegible]	4500	[illegible]	5520	169.94
420	141.80	1440	[illegible]	2460	[illegible]	3500	[illegible]	4520	161.96	5540	170.78
440	141.80	1460	[illegible]	2480	[illegible]	3520	[illegible]	4540	162.38	5560	171.23
460	141.80	1480	[illegible]	2500	[illegible]	3540	[illegible]	4560	162.80	5580	172.67
480	141.80	1500	[illegible]	2520	[illegible]	3560	154.62	4580	163.22	5600	173.51
500	141.59	1520	142.51	2540	[illegible]	3580	[illegible]	4600	163.22	5620	174.35
520	[illegible]	1540	[illegible]	2560	[illegible]	3600	155.21	4620	163.22	5640	175.40
540	141.80	1560	[illegible]	2580	[illegible]	3620	155.21	4640	163.43	5660	176.45
560	141.80	1580	[illegible]	2600	148.10	3640	155.21	4660	163.85	5680	177.08
580	141.80	1600	[illegible]	2620	148.10	3660	155.21	4680	164.69	5700	177.50
600	141.80	1620	[illegible]	2640	148.31	3680	155.45	4700	[illegible]	5720	177.50
620	141.59	1640	[illegible]	2660	148.52	3700	155.45	4720	165.95	5740	177.71
640	141.59	1660	[illegible]	2680	148.73	3720	155.66	4740	166.16	5760	178.34
660	141.17	1680	143.27	2700	148.94	3740	155.66	4760	166.37	5780	179.39
680	140.96	1700	[illegible]	2720	148.94	3760	155.66	4780	166.37	5800	180.44
700	140.96	1720	[illegible]	2740	149.15	3780	155.87	4800	166.37	5820	180.86
720	140.75	1740	143.12	2760	149.15	3800	155.87	4820	166.37	5840	181.07
740	140.75	1760	[illegible]	2780	149.36	3820	156.50	4840	166.37	5860	180.44
760	140.54	1780	[illegible]	2800	149.36	3840	[illegible]	4860	166.37	5880	180.02
780	140.54	1800	[illegible]	2820	[illegible]	3860	[illegible]	4880	166.37	5900	180.65
800	140.54	1820	147.93	2840	[illegible]	3880	[illegible]	4900	166.37	5920	181.28
820	140.54	1840	144.11	2860	149.78	3900	[illegible]	4920	166.37	5940	182.54
840	140.54	1860	144.72	2880	149.99	3920	158.39	4940	166.57	5960	184.22
860	140.54	1880	144.35	2900	150.20	3940	158.39	4960	166.37	5980	188.21
880	[illegible]	1900	145.37	2920	150.20	3960	158.18	4980	166.58	6000	191.99
900	140.75	1920	145.16	2940	150.41	3980	157.97	5000	167.00	6020	195.35
920	140.75	1940	[illegible]	2960	150.41	4000	157.76	5020	167.21	6040	197.45
940	140.96	1960	144.71	2980	150.62	4020	157.75	5040	167.22	6060	199.76
960	140.96	1980	[illegible]	3000	150.83	4040	157.76	5060	167.42	6080	201.65
980	141.17	2000	[illegible]	3020	[illegible]	4060	157.76	5080	167.63	6100	204.17
1000	141.38	2020	144.71	3040	[illegible]	4080	157.76	5100	167.84	6120	205.85
				3060	151.25						

Survey traversed 20' per minute.

Temp after 20
minutes 208.79

R Pruett

3'
[illegible] 5/5/1981

PRUETT WIRELINE SERVICE

8915 ROSEDALE HWY BAKERSFIELD CA 93308
(805) 589-2768

Pruett

SUB—SURFACE TEMPERATURE SURVEY

[illegible]
5 [illegible]

COMPANY Getty Oil **FIELD** [illegible] **WELL NAME** 11 Y-10

TOTAL DEPTH	7965'	WELL STATUS	Static	BOMB HUNG @	none	DATE	May 5, 1981
CASING	13 3/8" @ 1215'	CASING PRESSURE	-0-	TIME ON BOTTOM	1:34	ELEMENT RANGE	62-158°
LINER	---	TUBING PRESSURE	-0-	TIME OFF BOTTOM	2:04	ZERO POINT	Rig floor
PERFORATIONS	---	ZONE	---	SHUT IN	---	ELEVATION	---
MFP	---	MAX °F	221.91°	ON PRODUCTION	---	PICKUP	7965'
TUBING DETAIL	---			PURPOSE	Traverse Temperature - 20' per minute		

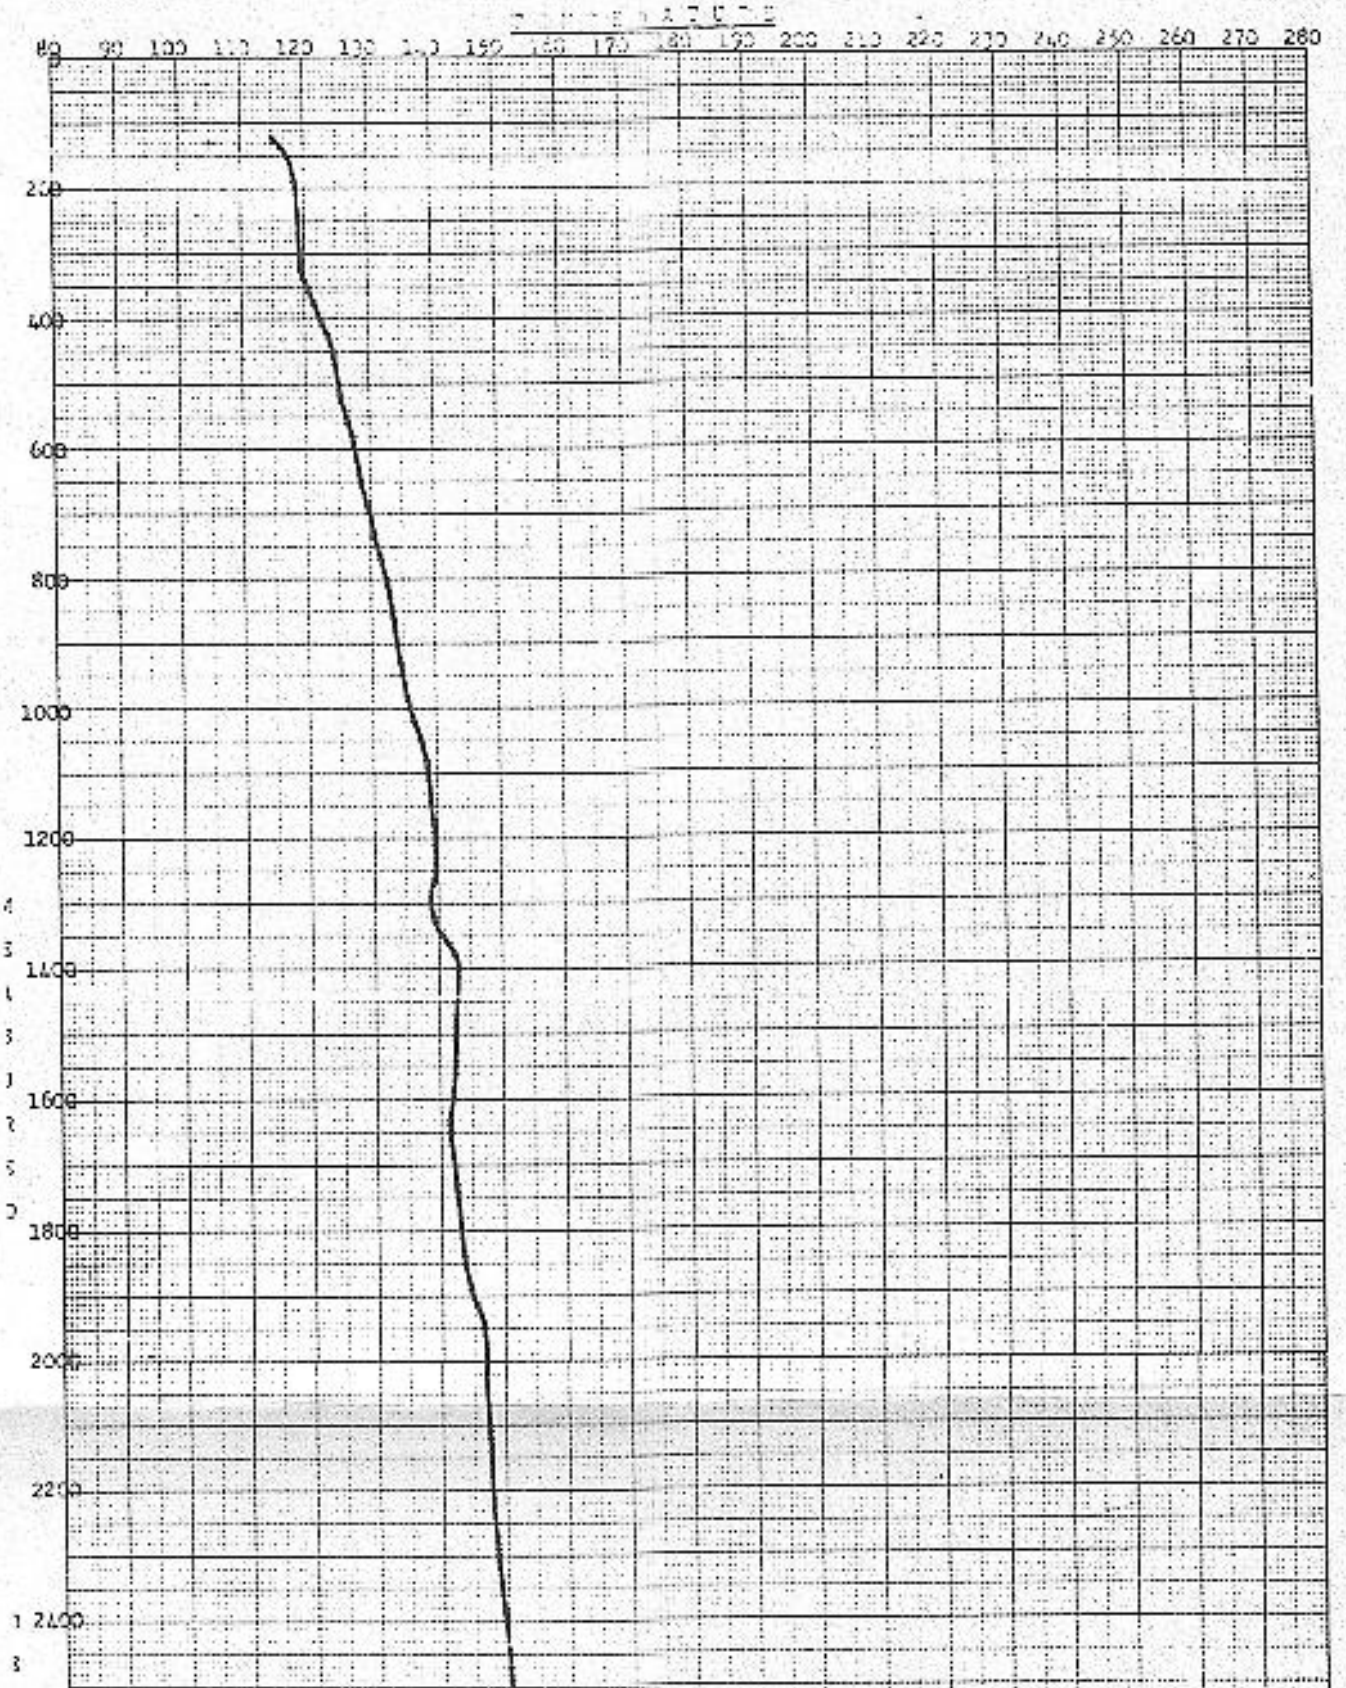

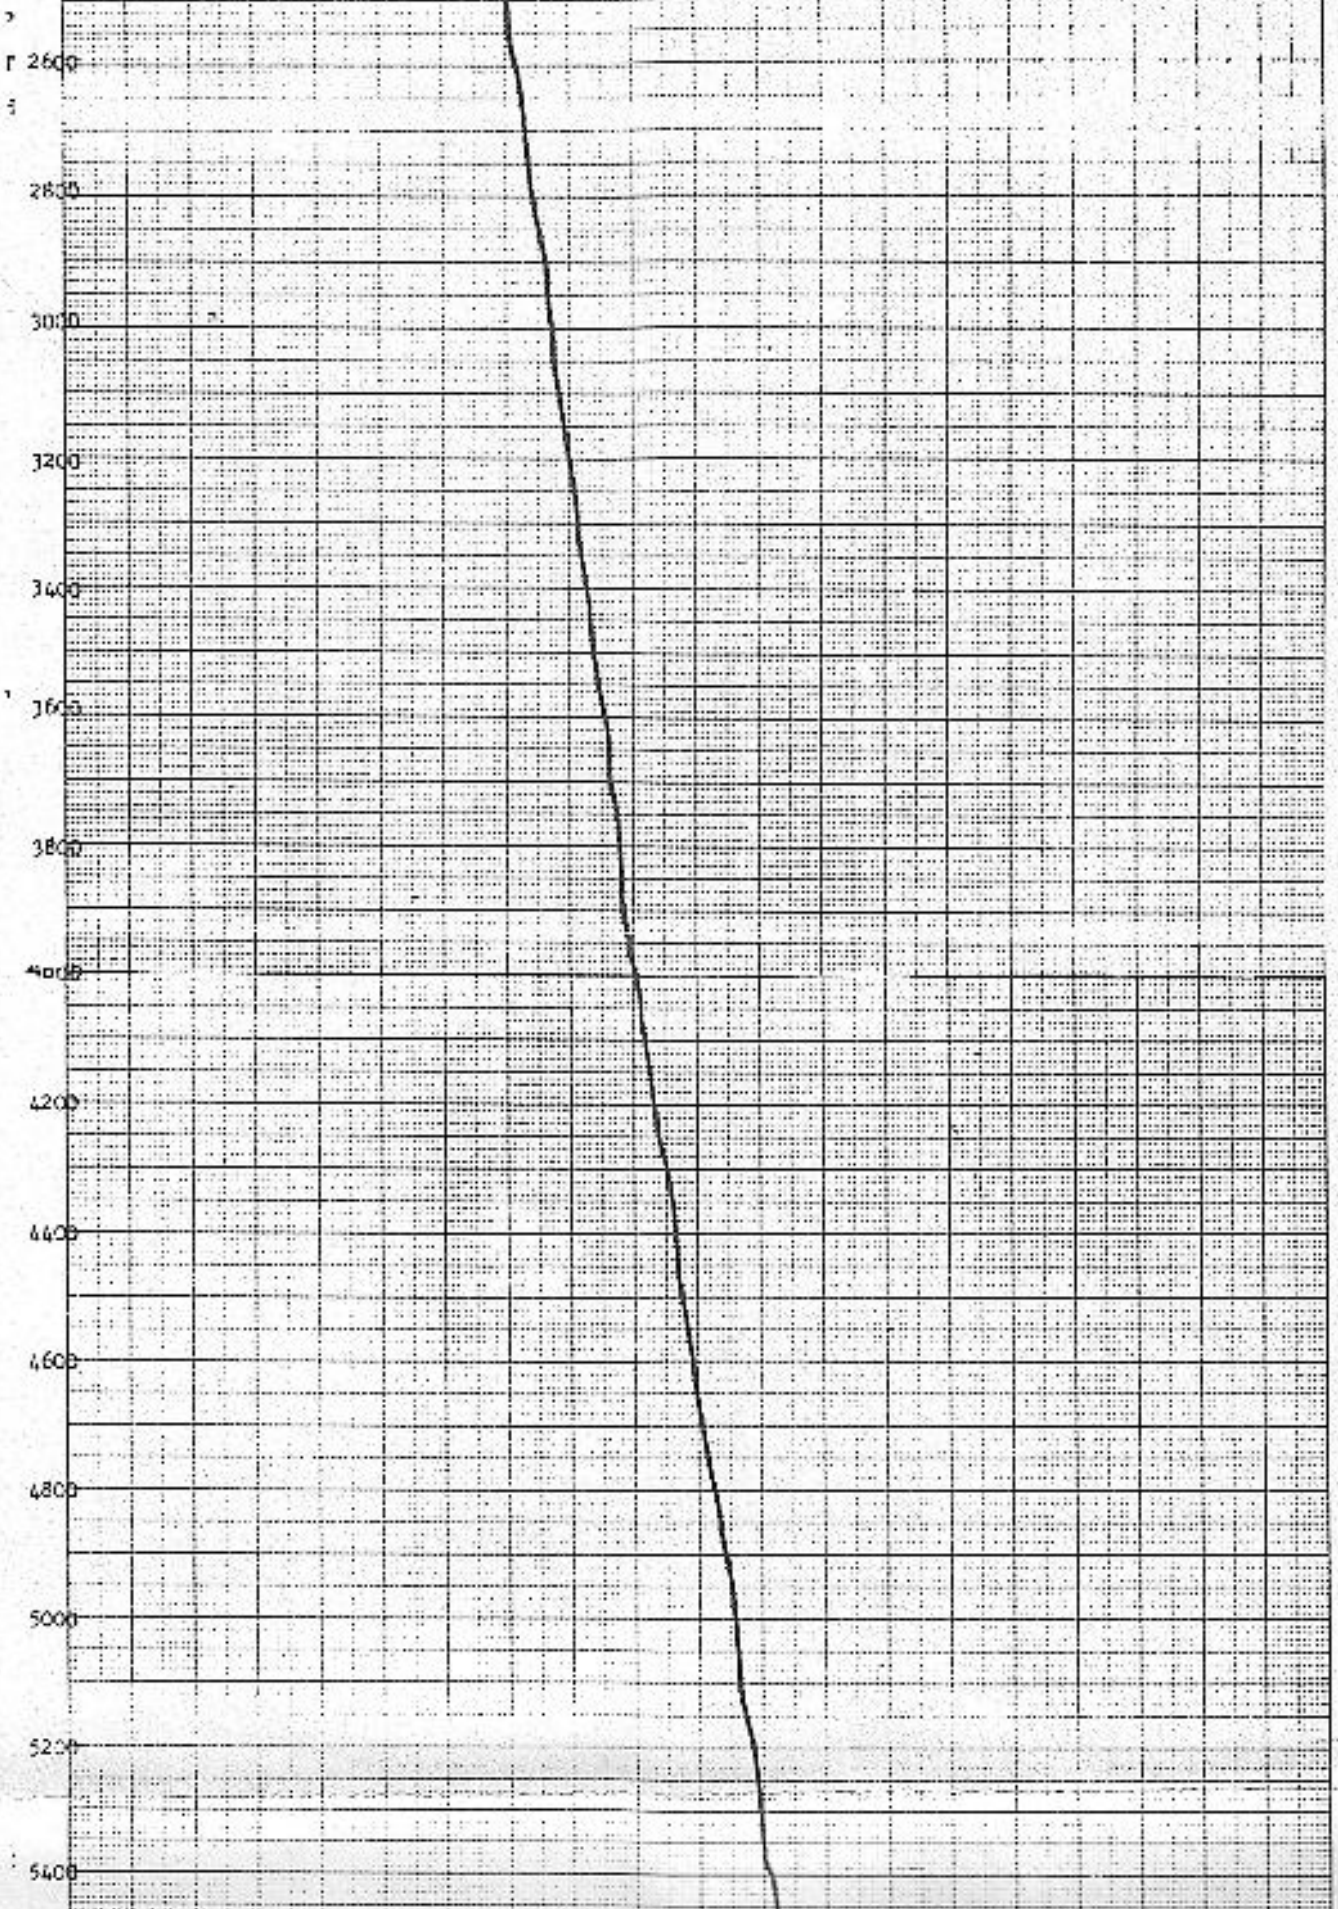

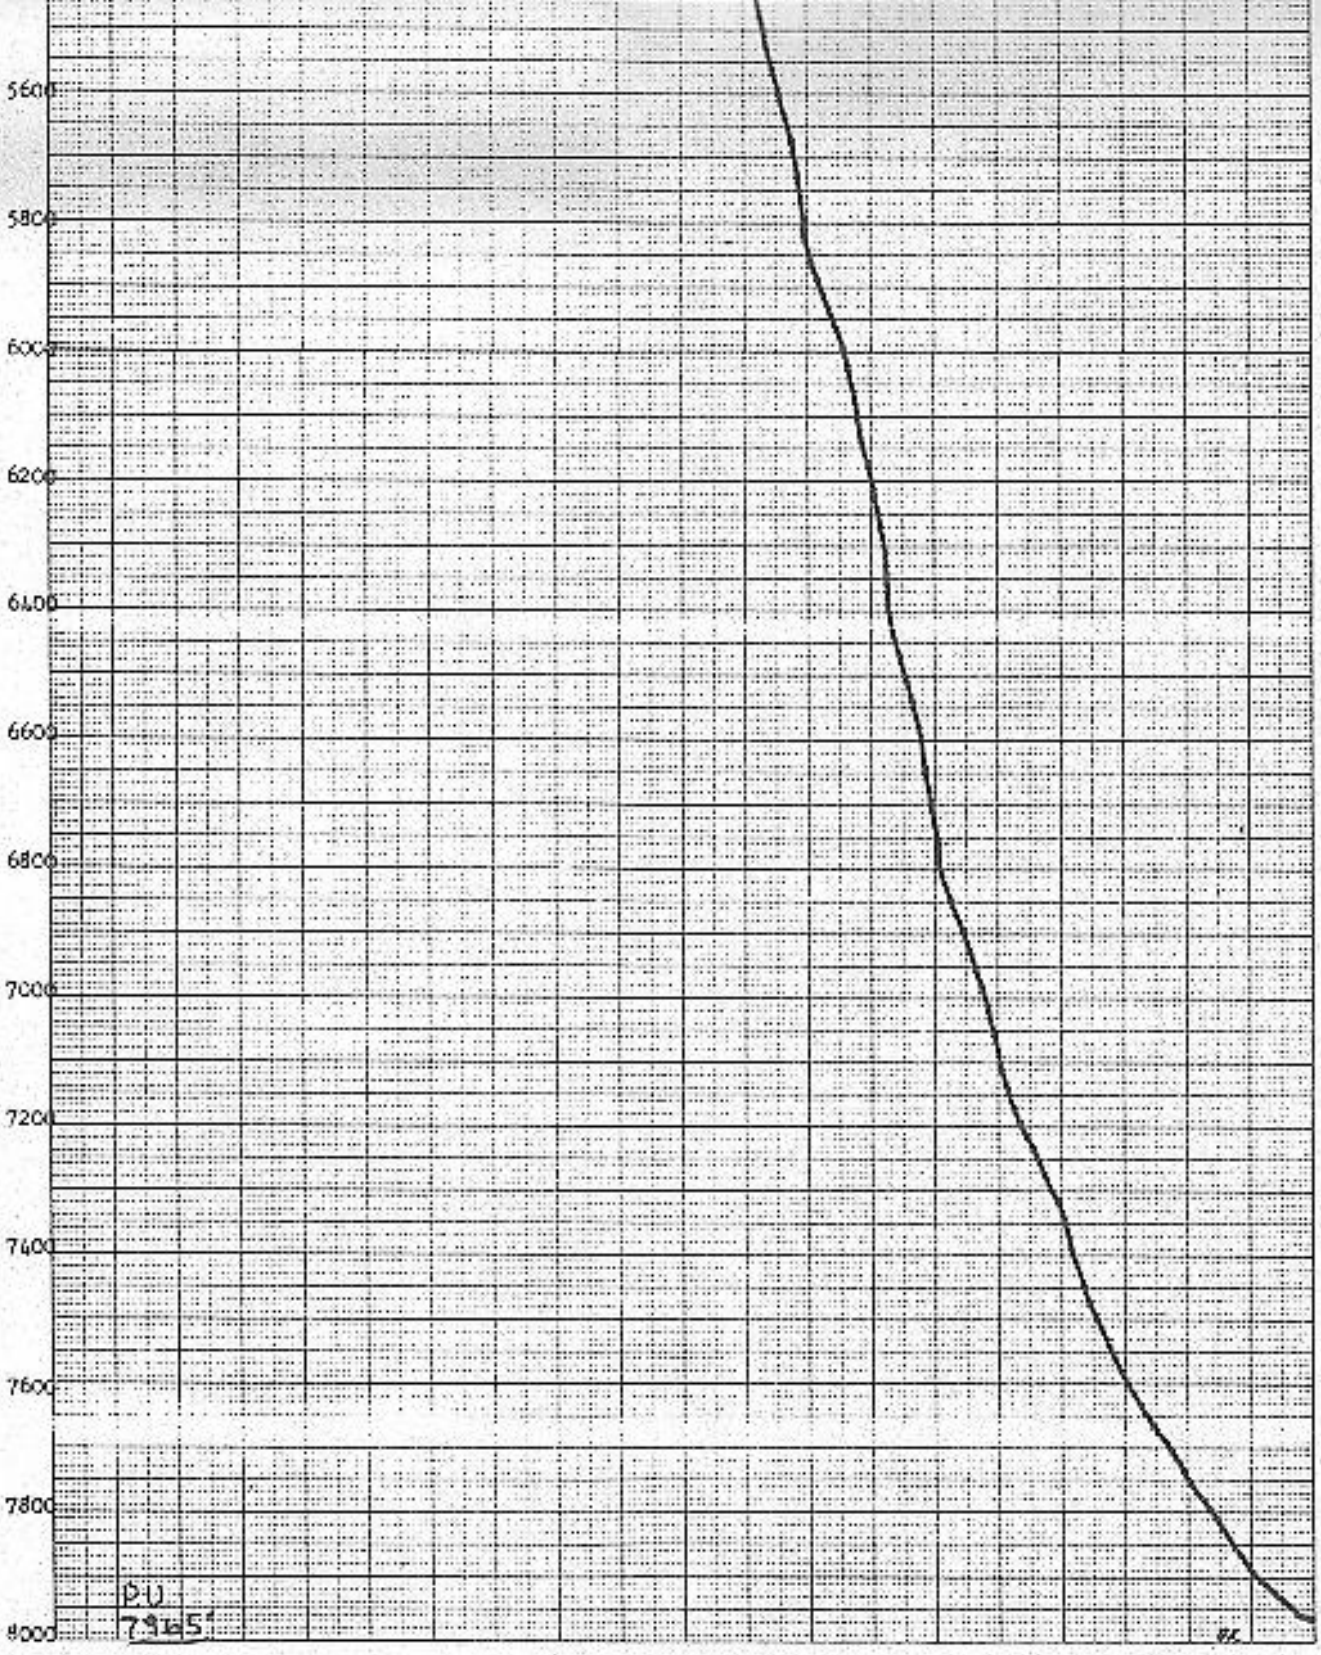

SURVEY DATA

DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP	DEPTH	TEMP
40	83.79	1380	143.03	2720	153.49	4060	171.32	5400	191.20	6720	220.01
60	91.58	1400	143.24	2740	153.49	4080	171.53	5420	191.61	6740	220.21
80	103.06	1420	143.03	2760	153.69	4100	171.94	5440	192.23	6760	220.42
100	110.64	1440	142.83	2780	153.90	4120	172.14	5460	192.63	6780	220.62
120	114.95	1460	142.83	2800	154.10	4140	172.55	5480	193.04	6800	221.03
140	117.41	1480	142.83	2820	154.72	4160	172.76	5500	193.45	6820	221.64
160	118.23	1500	142.83	2840	155.13	4180	172.96	5520	193.66	6840	222.46
180	118.64	1520	142.62	2860	155.54	4200	173.17	5540	194.27	6860	223.28
200	119.05	1540	142.62	2880	156.15	4220	173.37	5560	194.68	6880	224.09
220	119.05	1560	142.62	2900	156.56	4240	173.78	5580	195.09	6900	224.91
240	119.25	1580	142.42	2920	156.56	4260	174.19	5600	195.70	6920	225.52
260	119.46	1600	142.42	2940	156.77	4280	175.01	5620	196.11	6940	226.34
280	119.46	1620	142.01	2960	156.77	4300	175.42	5640	196.72	6960	227.16
300	119.46	1640	141.60	2980	156.97	4320	175.83	5660	197.13	6980	227.77
320	119.66	1660	141.80	3000	157.18	4340	176.04	5680	197.74	7000	228.38
340	120.07	1680	142.01	3020	157.59	4360	176.45	5700	198.35	7020	228.79
360	120.89	1700	142.21	3040	157.79	4380	176.65	5720	198.56	7040	229.20
380	121.71	1720	142.42	3060	157.79	4400	176.65	5740	198.76	7060	229.81
400	122.53	1740	142.42	3080	158.20	4420	176.86	5760	198.97	7080	230.02
420	123.56	1760	142.62	3100	158.61	4440	177.06	5780	199.17	7100	230.22
440	124.38	1780	142.83	3120	158.82	4460	177.27	5800	199.38	7120	231.04
460	124.79	1800	143.03	3140	159.23	4480	177.47	5820	199.58	7140	231.65
480	125.20	1820	143.44	3160	159.43	4500	177.88	5840	200.19	7160	232.27
500	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]		

[illegible]	[illegible]	[illegible]	[illegible]	3180	159.61	[illegible]	[illegible]	5860	200.81	7180	233.08
520	125.61	1860	143.85	3200	160.05	4540	178.29	5880	201.42	7200	233.90
540	126.02	1880	144.26	3220	160.46	4560	178.70	5900	202.03	7220	234.72
560	127.04	1900	144.67	3240	160.66	4580	179.11	5920	202.85	7240	235.94
580	127.45	1920	145.90	3260	160.87	4600	179.52	5940	203.87	7260	236.76
600	127.86	1940	146.52	3280	161.07	4620	179.73	5960	204.48	7280	237.78
620	128.27	1960	146.77	3300	161.28	4640	179.93	5980	205.30	7300	238.80
640	128.48	1980	146.93	3320	161.48	4660	179.93	6000	206.12	7320	240.03
660	128.89	2000	146.93	3340	161.89	4680	180.34	6020	206.53	7340	240.44
680	129.50	2020	146.97	3360	162.10	4700	180.75	6040	206.93	7360	241.05
700	130.32	2040	147.13	3380	162.30	4720	181.16	6060	207.34	7380	241.66
720	130.53	2060	147.13	3400	162.71	4740	181.37	6080	207.75	7400	242.07
740	130.94	2080	147.34	3420	162.92	4760	181.78	6100	207.96	7420	242.89
760	131.55	2100	147.34	3440	163.12	4780	182.19	6120	208.36	7440	243.30
780	131.96	2120	147.54	3460	163.53	4800	182.80	6140	208.77	7460	243.91
800	132.78	2140	147.54	3480	163.74	4820	183.01	6160	209.39	7480	244.52
820	133.19	2160	147.75	3500	163.94	4840	183.42	6180	209.79	7500	245.75
840	133.40	2180	147.75	3520	164.35	4860	183.62	6200	210.20	7520	246.57
860	133.60	2200	147.95	3540	164.56	4880	184.03	6220	210.61	7540	247.59
880	134.01	2220	147.95	3560	164.97	4900	184.44	6240	211.22	7560	248.81
900	134.22	2240	148.16	3580	165.38	4920	184.85	6260	211.63	7580	249.63
920	134.42	2260	148.36	3600	165.99	4940	185.06	6280	212.04	7600	250.65
940	134.83	2280	148.57	3620	166.20	4960	185.47	6300	212.25	7620	251.88
960	135.24	2300	148.77	3640	166.20	4980	185.67	6320	212.45	7640	253.31
980	135.65	2320	148.98	3660	166.40	5000	185.88	6340	212.45	7660	254.74
1000	136.06	2340	148.98	3680	166.61	5020	185.88	6360	212.65	7680	256.17
1020	136.68	2360	149.39	3700	166.81	5040	186.08	6380	212.65	7700	257.60
1040	137.50	2380	149.59	3720	167.22	5060	186.08	6400	212.86	7720	258.82
1060	137.91	2400	150.00	3740	167.43	5080	186.24	6420	213.27	7740	259.64
1080	138.32	2420	150.00	3760	167.63	5100	186.49	6440	213.68	7760	260.66
1100	138.52	2440	[illegible]	3780	167.84	5120	186.90	6460	214.29	7780	262.09
1120	138.93	2460	150.21	3800	168.04	5140	187.31	6480	214.90	7800	263.73
1140	139.14	2480	150.21	3820	168.04	5160	187.93	6500	215.51	7820	265.16
1160	139.34	2500	150.21	3840	168.25	5180	188.34	6520	216.13	7840	266.59
1180	139.75	2520	150.41	3860	168.25	5200	188.74	6540	216.54	7860	268.22
1200	139.96	2540	150.41	3880	168.45	5220	188.95	6560	217.15	7880	269.45
1220	139.96	2560	[illegible]	3900	168.66	5240	189.16	6580	217.56	7900	270.88
1240	[illegible]	2580	[illegible]	3920	169.07	[illegible]	189.36	6600	217.97	7920	273.33
1260	[illegible]	2600	[illegible]	3940	169.47	[illegible]	189.57	6620	218.17	7940	275.57
1280	138.03	2620	150.67	3960	169.48	[illegible]	189.57	6640	218.58	7960	278.03
1300	[illegible]	2640	152.87	3980	170.39	[illegible]	189.77	6660	218.99	7980	280.27
1320	139.11	2660	151.05	4000	[illegible]	5340	189.77	6680	219.40		
1340	[illegible]	2680	[illegible]	4020	[illegible]	5360	189.98	6700	219.67		
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]				

Temp after 30
minutes 281.91

[illegible] Pruett