


010016

GL04740


# PRUETT WIRELINE SERVICE

8915 ROSEDALE HWY., BAKERSFIELD, CA 93308  
(805) 589-2768

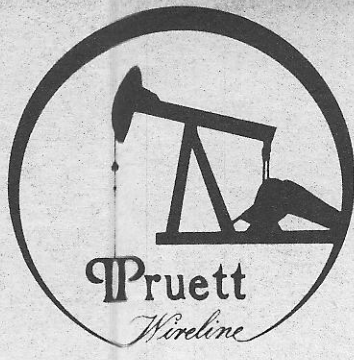

## SUB-SURFACE TEMPERATURE SURVEY

COMPANY	Phillips Pet	FIELD	Steamboat Springs	WELL NAME	COX-I-1
TOTAL DEPTH	3471'	WELL STATUS	Static	BOMB HUNG @	none
CASING	1762'	CASING PRESSURE	---	TIME ON BOTTOM	10:53
PERFORATIONS	---	TUBING PRESSURE	---	TIME OFF BOTTOM	11:08
MPP	---	ZONE	---	SHUT IN	---
TUBING DETAIL	---	MAX. °F.	349.62	ON PRODUCTION	---
				PURPOSE	Traverse Pressure @ 20' per minute
				DATE	Nov 6, 1981
				ELEMENT RANGE	52-458°
				ZERO POINT	22.5'
				ELEVATION	---
				PICKUP	3455'

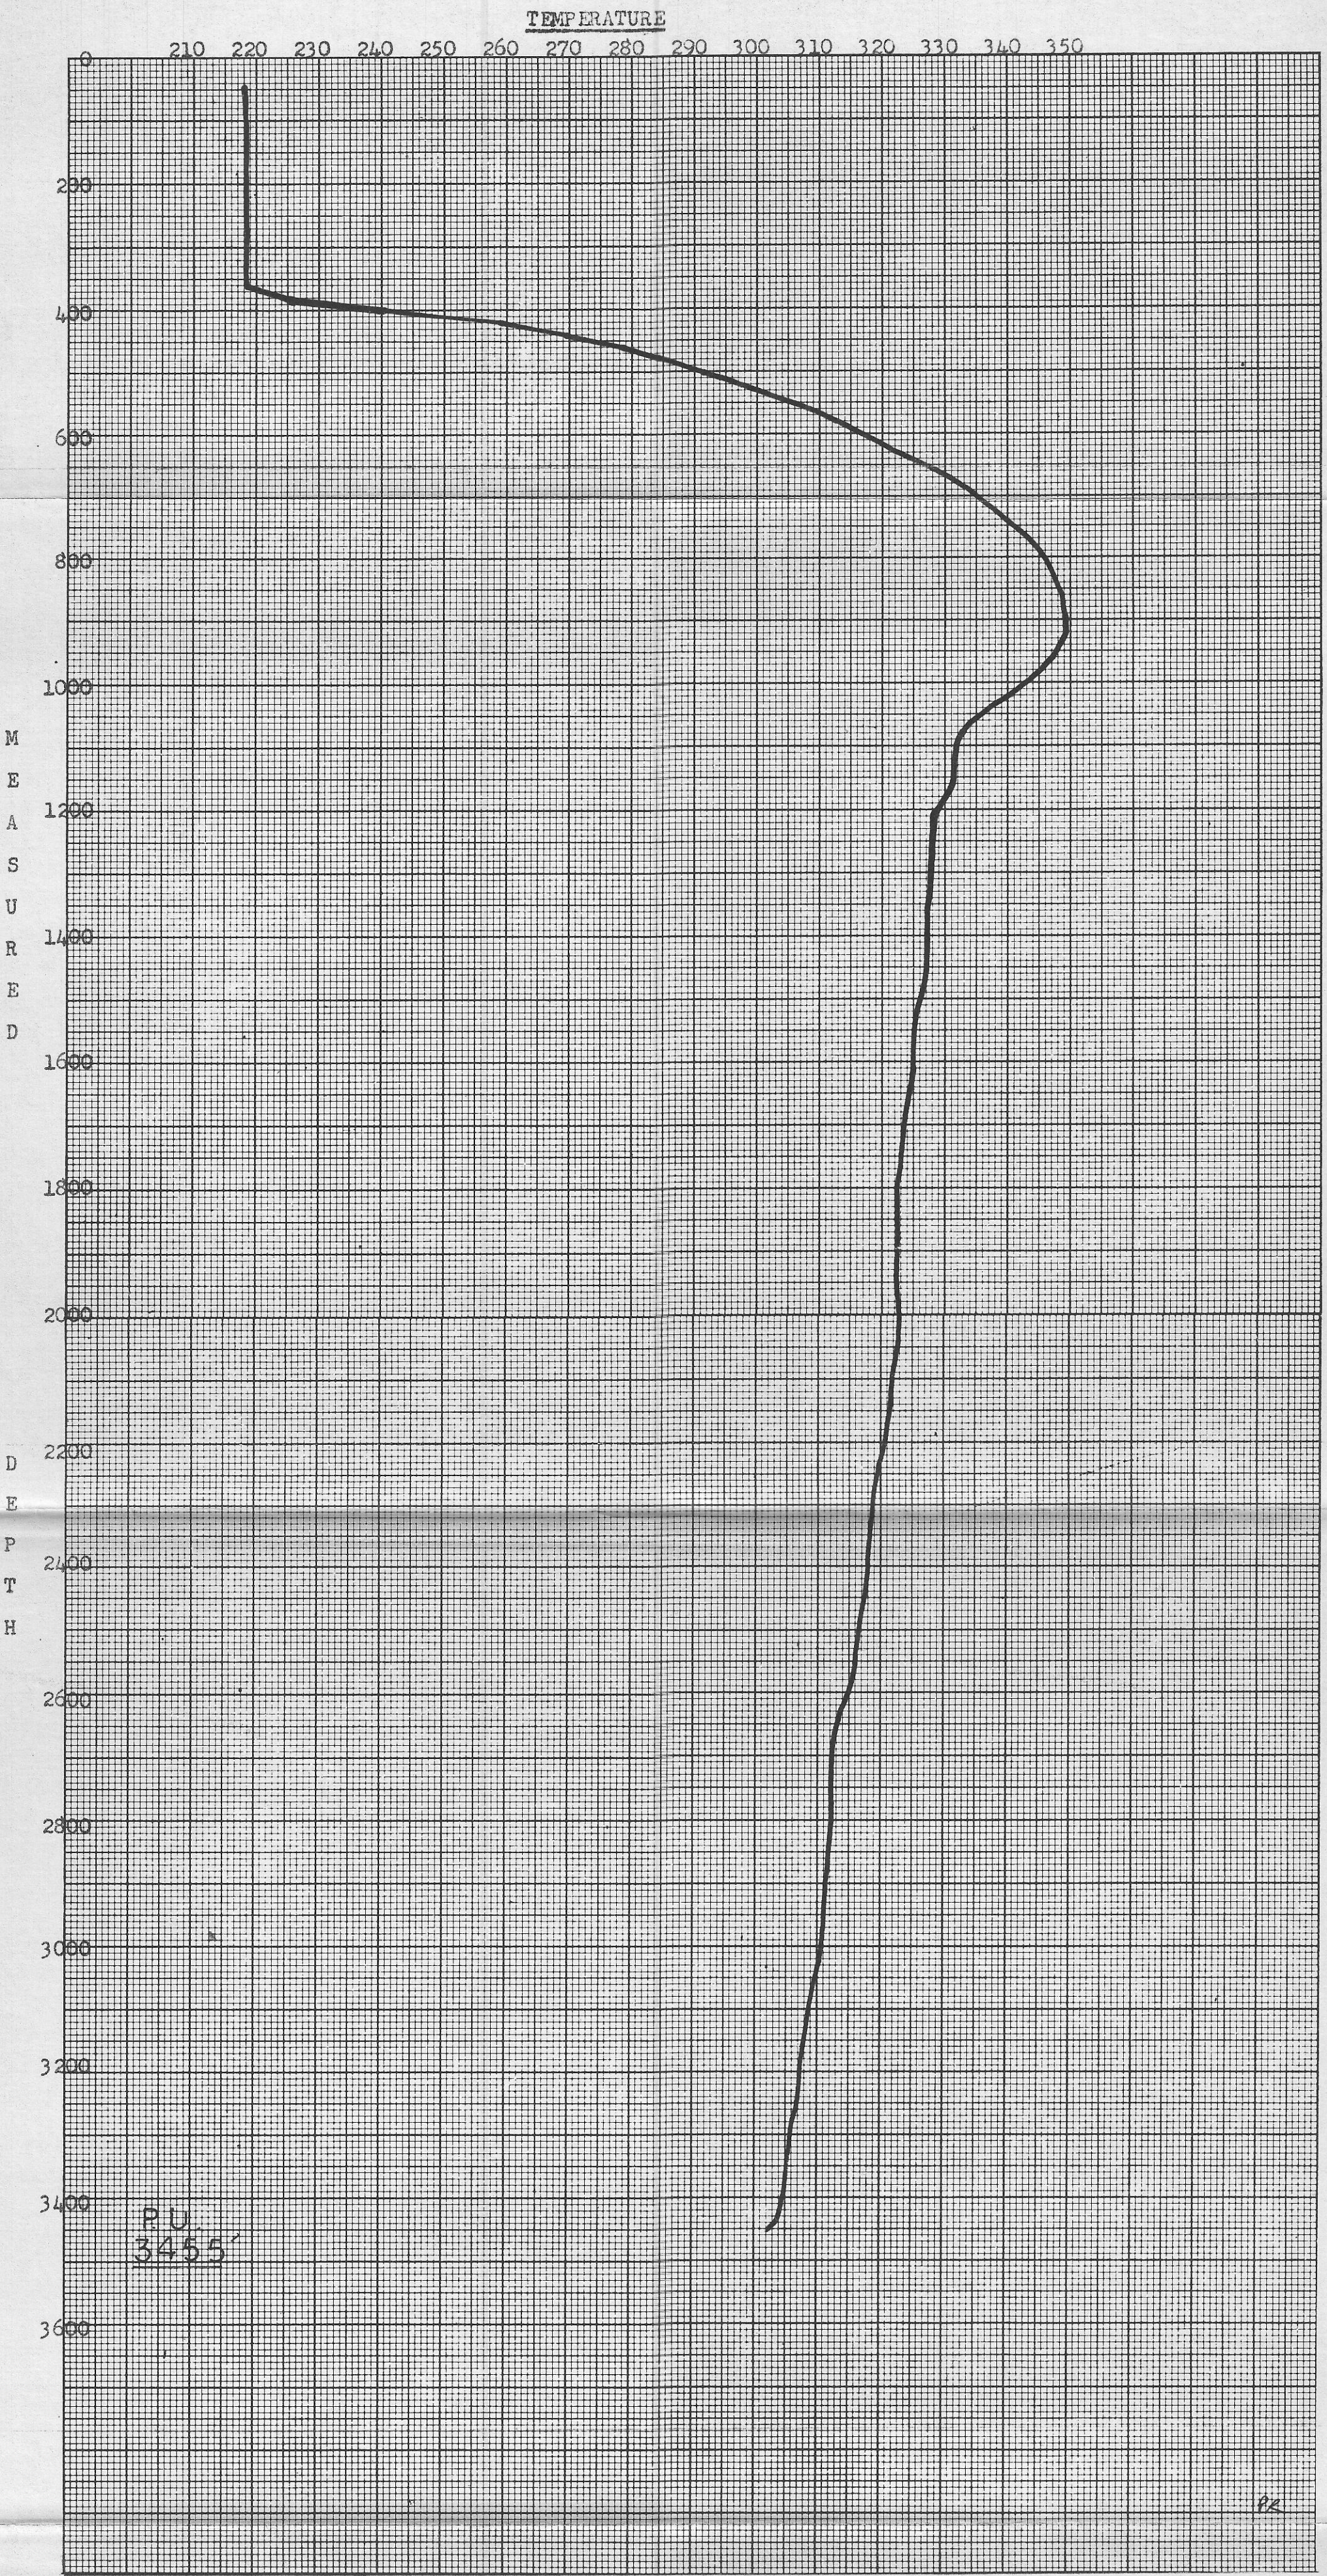

### SURVEY DATA

DEPTH	TEMPERATURE	DEPTH	TEMPERATURE	DEPTH	TEMPERATURE	DEPTH	TEMPERATURE
40	217.97	900	349.62	1760	322.97	2620	314.18
60	217.97	920	349.62	1780	322.76	2640	313.16
80	218.17	940	348.30	1800	322.36	2660	312.55
100	218.37	960	347.42	1820	322.36	2680	312.35
120	218.37	980	345.66	1840	322.36	2700	312.35
140	218.58	1000	343.24	1860	322.56	2720	312.35
160	218.58	1020	340.60	1880	322.56	2740	312.35
180	218.58	1040	337.30	1900	322.56	2760	312.35
200	218.58	1060	334.66	1920	322.56	2780	312.35
220	218.58	1080	332.57	1940	322.56	2800	312.14
240	218.58	1100	331.55	1960	322.56	2820	312.14
260	218.58	1120	331.55	1980	322.76	2840	312.14
280	218.58	1140	331.55	2000	322.76	2860	311.53
300	218.58	1160	331.55	2020	322.76	2880	311.53
320	218.58	1180	330.12	2040	322.56	2900	311.53
340	218.58	1200	328.69	2060	322.56	2920	311.32
360	218.58	1220	328.08	2080	321.95	2940	311.32
380	225.73	1240	328.08	2100	321.74	2960	310.71
400	240.85	1260	328.08	2120	321.74	2980	310.71
420	259.44	1280	328.08	2140	321.74	3000	310.51
440	270.26	1300	328.08	2160	321.13	3020	310.10
460	278.84	1320	327.87	2180	320.93	3040	309.89
480	285.18	1340	327.46	2200	320.72	3060	309.28
500	291.92	1360	327.26	2220	320.11	3080	309.28
520	297.43	1380	327.26	2240	319.50	3100	308.87
540	302.54	1400	327.26	2260	319.50	3120	308.26
560	308.06	1420	327.26	2280	319.09	3140	308.26
580	312.75	1440	327.26	2300	318.47	3160	307.85
600	317.25	1460	327.26	2320	318.47	3180	307.44
620	321.13	1480	326.85	2340	318.27	3200	307.24
640	325.01	1500	326.24	2360	318.27	3220	307.03
660	328.48	1520	325.22	2380	317.86	3240	306.63
680	331.55	1540	324.81	2400	317.86	3260	306.63
700	335.10	1560	324.81	2420	317.86	3280	306.01
720	337.52	1580	324.81	2440	317.45	3300	305.60
740	340.16	1600	324.81	2460	317.04	3320	305.40
760	342.80	1620	324.60	2480	316.84	3340	305.40
780	344.56	1640	324.60	2500	316.42	3360	304.99
800	345.88	1660	324.19	2520	316.23	3380	304.79
820	347.20	1680	323.58	2540	315.82	3400	304.79
840	348.08	1700	323.58	2560	315.82	3420	304.38
860	348.96	1720	323.38	2580	315.21	3440	303.77
880	349.40	1740	322.97	2600	315.00	3455	301.93

G Doolan