CENTURY GEOPHYSICAL CORPORATION
Tulsa, Oklahoma

WELL NO. WA-IT-5 | DATE 12-10-80
FIELD, POOL, FARM OR CITY

FUQUA NATIONAL
WA-IT-5
WAH WAH VALLEY
GRAVEL
UTAH
NA

Permanent Datum			
Elevation			
Log Measured From			
Drilling Measured From			
Date			
Run No.			
Depth-Driller			
Depth-Logger			
Bottom Logged Interval			
Top Logged Interval			
Type Fluid in Hole			
Salinity, PPM Cl			
Density			
Level			
Max. Rec. Temp. Deg. F.			
Operating Rig Time			
Recorded By			
Witnessed By			

TOTAL DEPTH DRILLER	6500
TOTAL DEPTH LOGGER	6500
BOTTOM LOGGED INTERVAL	6500
TOP LOGGED INTERVAL	SURFACE
TYPE FLUID IN HOLE	AIR
SALINITY, PPM Cl	
DENSITY	
LEVEL	FULL

CASING 1 @ 80 FT(DRILLER), 80 FT(LOGGER)
CASING 2 @ FT(DRILLER), FT(LOGGER)
CASING 3 @ FT(DRILLER), FT(LOGGER)

RUN NUMBER	ONE
TIME SINCE CIRCULATION	
MAX. REC. TEMP. DEG. F.	
EQUIPMENT NUMBER	3340
LOCATION	
RECORDED BY	
WITNESSED BY	

REMARKS: 5.5" BIT/HAMMER, DRY AERATED, CUTTINGS

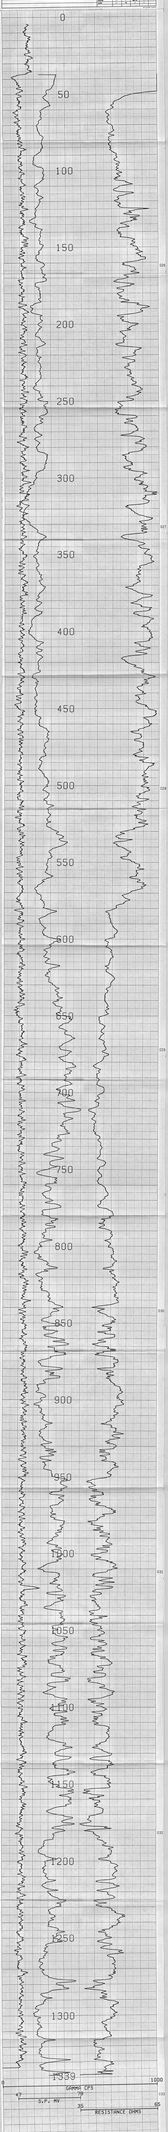

GAMMA CPS
0 100
SURF. AN
0 60
RESISTANCE OHMS

COMPU-LOG W3L8 PLOT 12-10-80

WA-IT-5
FUQUA NATIONAL
WAH WAH VALLEY

HOLE DIAMETER = 12.0

CAL-SID-CPS = 6589
PROBE # 80SGR-238
TRUCK # 7745
SPFL, #3 0
JONES, F.

CAL-RUN-CPS = 6210
PROBE CAL SIGS = +00046
DEPTH, FEET

+ 1/2 POINT SHIFT
+ 1 POINT SHIFT
+ BOTTOM OF CSNG

TRUE NORTH

VERTICAL DEVIATION

COMPUTED W3L1 - DEVIATION
HOLE DIA WA-IT-5

SCALE: 1 IT/IN
DEPTH: 0 TO 6500
TAKE OFF@ 1340. FT
AZIMUTH: 35
DISTANCE: 0.5 FT