

WELL RRGE-2 ARTESIAN CAPABILITY

The probable maximum sustained free-flowing artesian capability of well RRGE-2 is 22 lps.

Predicted wellhead pressures at a range of flow rates and times is shown on Figure 3-E-1. The predictions are based on several assumptions:

1. The intended use will be 85% for a period of 3-5 years.
2. The hot wellhead shut-in pressure is 970 kPa.
3. The minimum wellhead pressure required to sustain flow is 70 kPa.
4. The available drawdown for free flow is 900 kPa.
5. No interference drawdowns are imposed on the well.

With these assumptions, the available drawdown would be exhausted after three years of 85% sustained use at 22 lps. Flowing wellhead temperature is approximately 135°C.

GLO7292

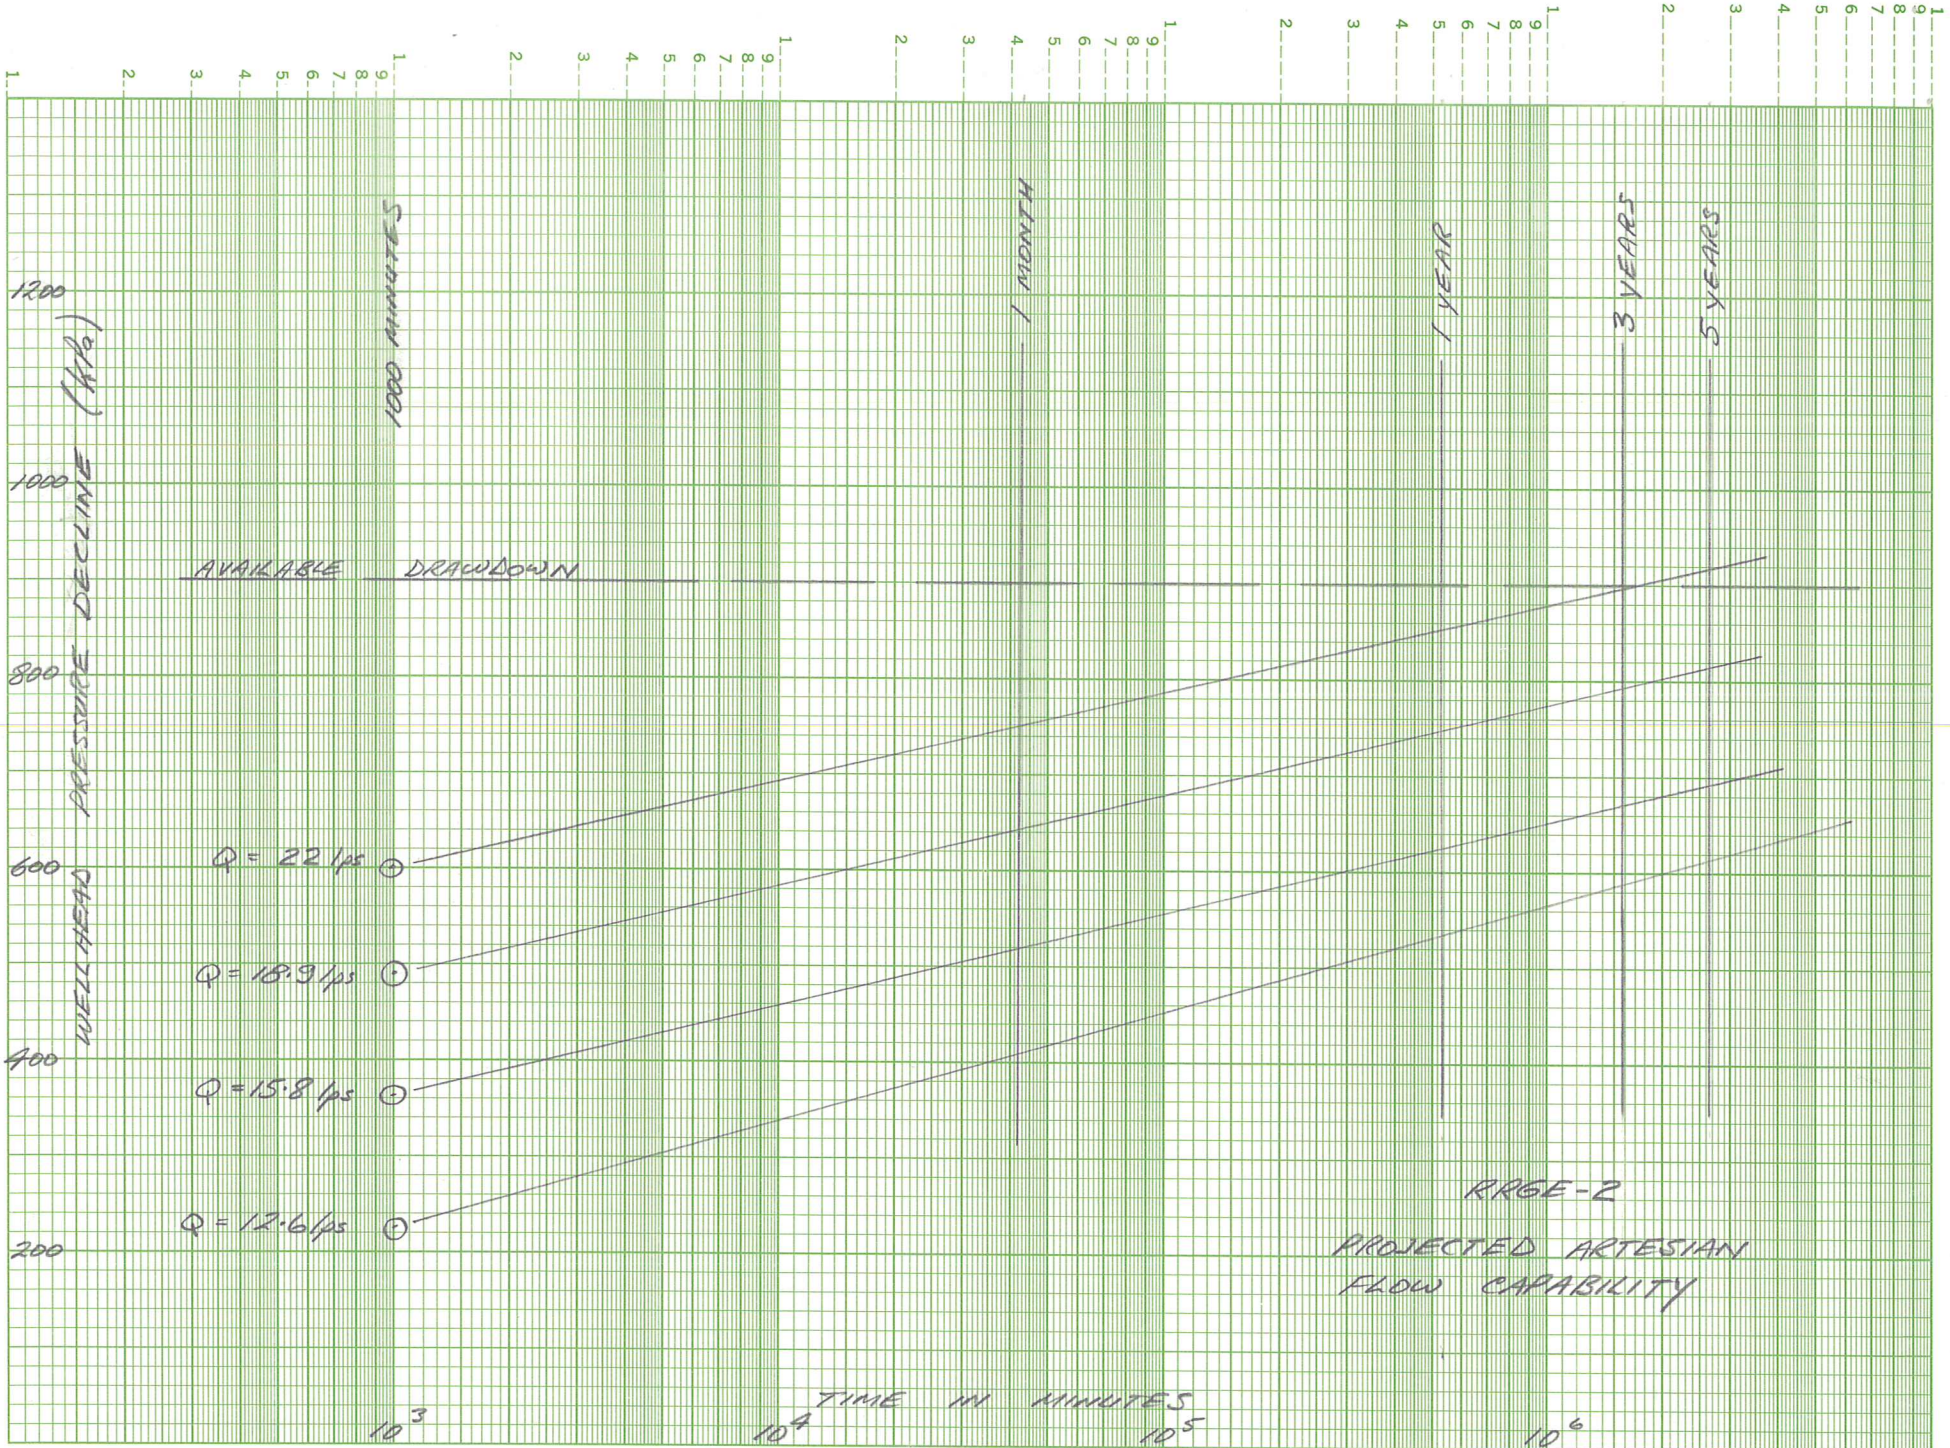


FIGURE SE-1

CHALK STAMS PROBE 2 ARTESIAN FLOW

Flow Rate Q (fps)	1000 min. Drawdown	Reverted Drawdown	TOTAL DRAWDOWN.							
			1 mo (85%)	1 yr (85%)	3 yr (85%)	5 yr (85%)	5 yr (85%)	5 yr (85%)		
0 (ps)	5 (Wd)	5 to 10 kg t	1.64	1.56	2.72	2.65	3.2	3.13	3.42	3.35
12.6	224 +	110 x	180	172	299	292	352	344	376	369
			404	396	523	516	576	568	600	593
15.75	362 +	95	156	148	258	252	304	297	325	318
			518	510	620	614	666	659	687	680
18.9	489 +	91	149	142	248	241	291	285	311	305
			638	631	737	730	780	774	800	794

22.05 600 +

Not shut-in wellhead pressure is 140 psi is 965 Wd.

Main pressure for flow is 10 psi is 69 Wd

available drawdown is 900 Wd.

Initial drawdown at 1000 min takes from Specific Gravity p 64.

