DUAL INDUCTION-LATERLOG
WITH SHORT CONVENTIONAL NORMAL

SCHLUMBERGER

COMPANY
WELL
FIELD
COUNTY
STATE

COMPANY CHEVRON OIL COMPANY
WELL CHEVRON CITY #3
FIELD WILDCAT
COUNTY MORROW STATE OKLAHOMA

Other Services: CNL-FDC-GR-CAL

Permanent Datum: GL	Elevation: 3348	Elevation: KB 3358	
Log Measured From: KB	10 Ft. Above Permanent Datum		
Drilling Measured From: KB			

Date: 3-8-84	Run Number: ONE	Depth-Driller: 10,000	Depth-Logger: 10,000
Bottom Log Interval: 9,998	Top Log Interval: 2,000	Casing-Driller: 9 5/8 @ 2,000	Casing-Logger: 2,000
Bit Size: 8 3/4	Type Fluid in Hole: GEL CHEMICAL	Density: 9.2	Viscosity: 45
pH: 10.5	Fluid Loss: 6.0	Source of Sample: PITS	
Rm @ Meas. Temp.: .75 @ 75°	Rmf @ Meas. Temp.: .60 @ 75°	Rmc @ Meas. Temp.: .90 @ 75°	
Source: Rmf: MEASURED	Source: Rmc: MEASURED	Rm @ BHT: .37 @ 175°	
Time Since Circulation: 12 HRS			
Time Since Last Log: 1 HR			
Max. Rec. Temp.: 175°			
Equipment Number: 1-1-1			
Location: 1 MILE SOUTH OF CHEYENNE			
Recorded By: J. SMITH			
Witnessed By: MR. BOB CRAWFORD			

BORE-HOLE RECORD			
Bit No.	1		
From	0		
To	10,000		
Hole Size	8 3/4		
Casing Size	9 5/8		
Cut Off	2,000		
Wgt.	36		
Grade	K-55		
Type Joint	ST&C		

RUN NO.	BIT	DEPTH DRILLED	HOURS	DULL GRADE
ONE	1	10,000	12	

CASING RECORD			
	Size	Wgt.	Depth
Surface	9 5/8	36	2,000
Intermediate			
Production			
Liner			

REMARKS:
Matrix Density No. 2.65 G/C

OPERATION DATA							
EQUIPMENT	LOCATION	RECORDED BY	WITNESSED BY	TIME SINCE CIRC.	TIME ON BOTTOM	TIME OFF BOTTOM	TIME STARTED
1-1-1	CYN	J. SMITH	MR. BOB CRAWFORD	12 HRS	0800	1000	1100

- Surface Recorded with recorder used for SFL#8
- Logging speed 30 FT/MIN
- Logging Unit 1-1-1
- SFL#8 Serial # 1-1-1 & Serial # 1

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretations, and we shall not be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to Clause 9 of our General Terms and Conditions as set forth in our current Price Schedule.

SPONTANEOUS-POTENTIAL
MILLIVOLTS

10 [MV] 0

RESISTIVITY
OHMS M²/M

DEEP INDUCTION 10GO
0 10

SFL
0 10

AVERAGED LATERLOG-8
0 10

AMP. AVE. LATERLOG-8
0 10

CONDUCTIVITY
MILLIMHOS M⁻¹ — OHMS M²/M

DEEP INDUCTION 10GO
2000 0

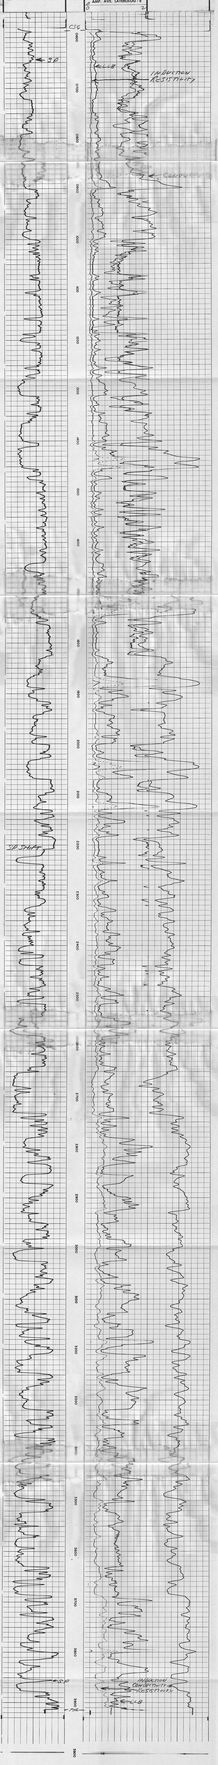

REPEAT