

PRUETT WIRELINE SERVICE


8915 ROSEDALE HWY., BAKERSFIELD, CA 93308
(805) 589-2768



GLO4388-12

SUB-SURFACE TEMPERATURE SURVEY

COMPANY Chevron Resources FIELD Beowawe WELL NAME 85-18 Run 5
 TOTAL DEPTH 4520' WELL STATUS Static BOMB HUNG @ none DATE May 8, 1980
 CASING 9 5/8" @ 2937' CASING PRESSURE --- TIME ON BOTTOM 1:04pm ELEMENT RANGE 36-499°
 LINER none TUBING PRESSURE --- TIME OFF BOTTOM 1:24pm ZERO POINT Rig Floor
 PERFORATIONS none ZONE no info SHUT IN --- ELEVATION no info
 MPP none MAX °F 280.58° ON PRODUCTION Static PICKUP 4500'
 TUBING DETAIL Drill Stem to 4520', Todco Ring 4496' PURPOSE Temperature Survey with 5 minute stops

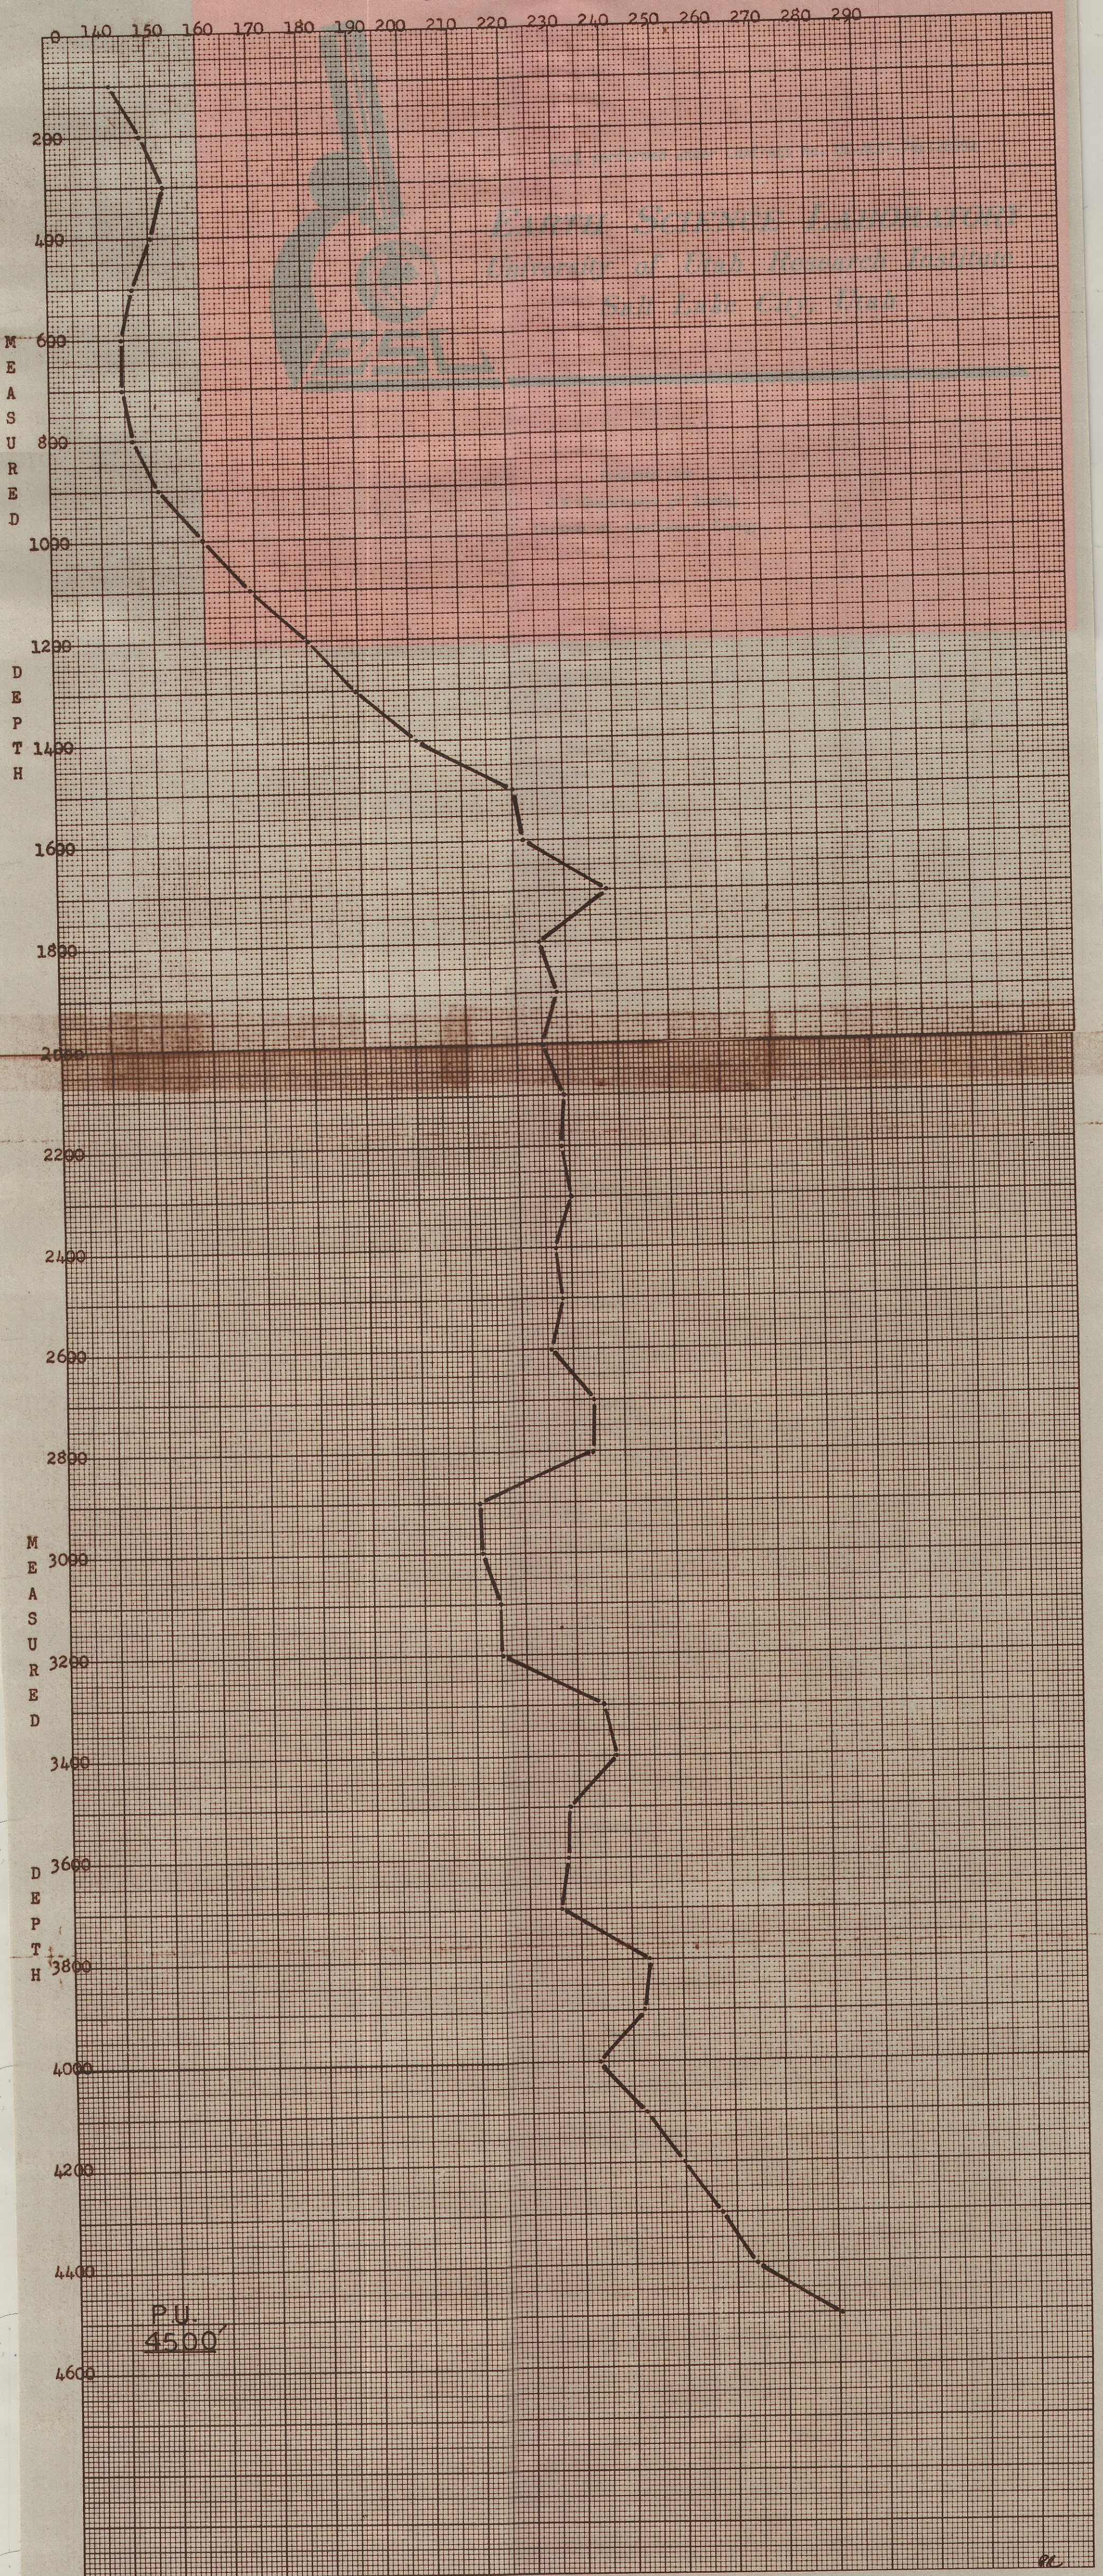

SURVEY DATA

DEPTH	TEMPERATURE	DEPTH	TEMPERATURE	DEPTH	TEMPERATURE	DEPTH	TEMPERATURE
100	142.90	1200	180.30	2300	230.02	3400	237.66
200	148.90	1300	189.61	2400	226.84	3500	228.32
300	153.00	1400	201.31	2500	228.32	3600	227.90
400	150.40	1500	220.25	2600	225.77	3700	226.20
500	146.70	1600	221.95	2700	234.05	3800	243.61
600	144.50	1700	238.51	2800	233.84	3900	242.55
700	144.50	1800	224.70	2900	211.06	4000	233.21
800	146.50	1900	228.30	3000	211.49	4100	242.55
900	151.26	2000	225.14	3100	215.16	4200	249.77
1000	159.93	2100	229.17	3200	215.16	4300	257.41
1100	169.03	2200	228.53	3300	235.12	4400	263.78
						4500	280.58

* and 20 minute stop on Bottom.

C Skenfield